

报告编号:

测试时间: 2019-06-08 16:39

产品特征

灯具制造厂商:

灯具型号: XQ613040.01W-D15

电压: 221.4 V

功率: 39.90 W

光源个数: 1

电流: 0.189 A

功率因数: 0.954

光度结果

灯具CIE分类: 直接型

灯具光通量: 2180.5 lm

下射光通量比: 100%

水平扩散角 (25%, 50%, 75%, 100%): H27, H17.9, H11.1, H1

垂直扩散角 (25%, 50%, 75%, 100%): V27, V18.3, V11.5, V2

灯具光效等级 (LER): 55

峰值光强: 15383.21 cd

额定光通量: 2180.5 lm

灯具效率: 100%

上射光通量比: 0%


中心光强: 14622.96 cd

峰值光强位置: H270 V2

灯具实物照片



配光曲线

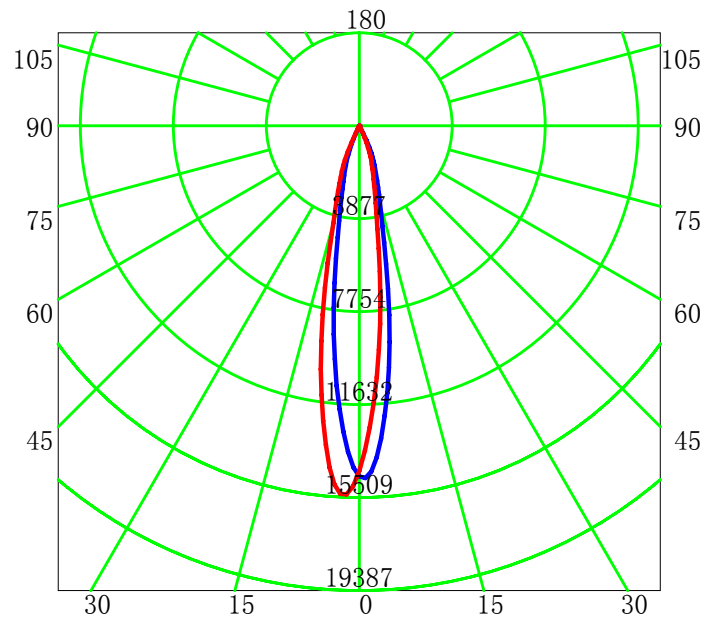

平均光束角 (50%): 18.1° 单位: cd

— C0-C180 — C90-C270

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600



测试距离: 8.650 m

环境湿度:

核 验:



配光曲线

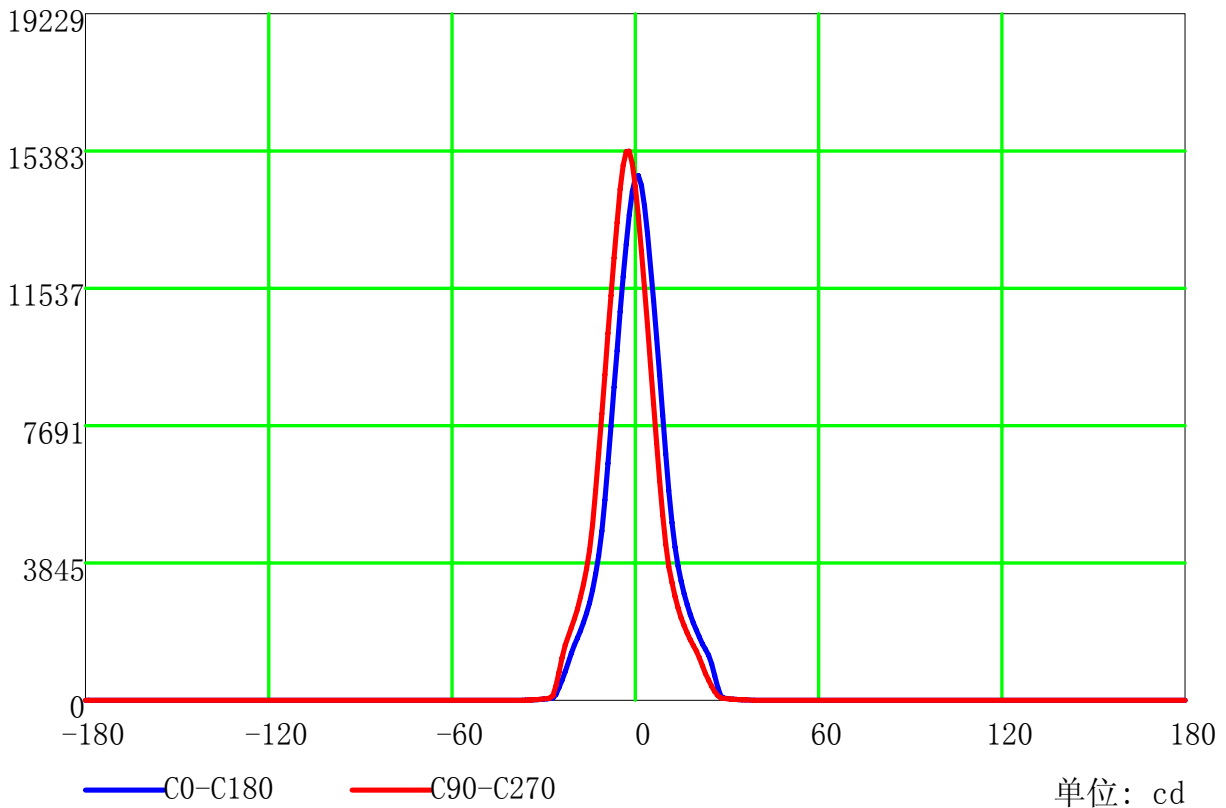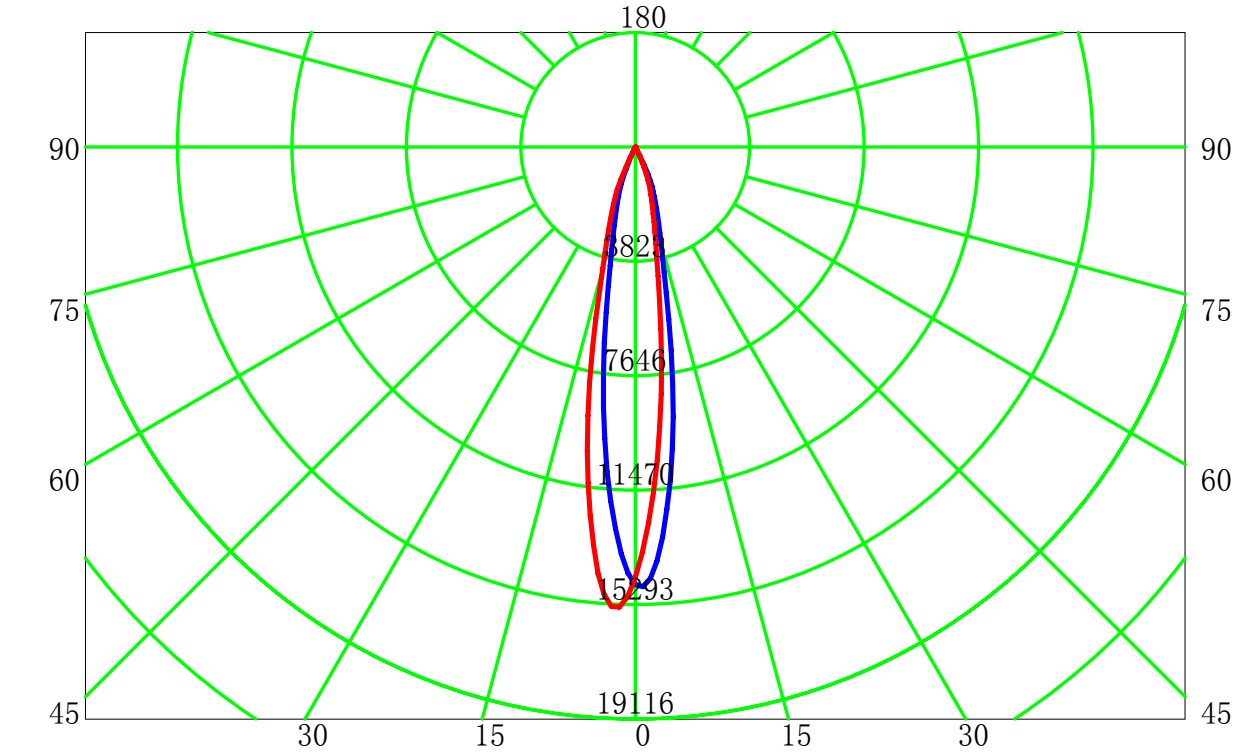

— C0-C180

— C90-C270

单位: cd

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600


测试距离: 8.650 m

环境湿度:

核 验:



配光曲线(cd/klm)

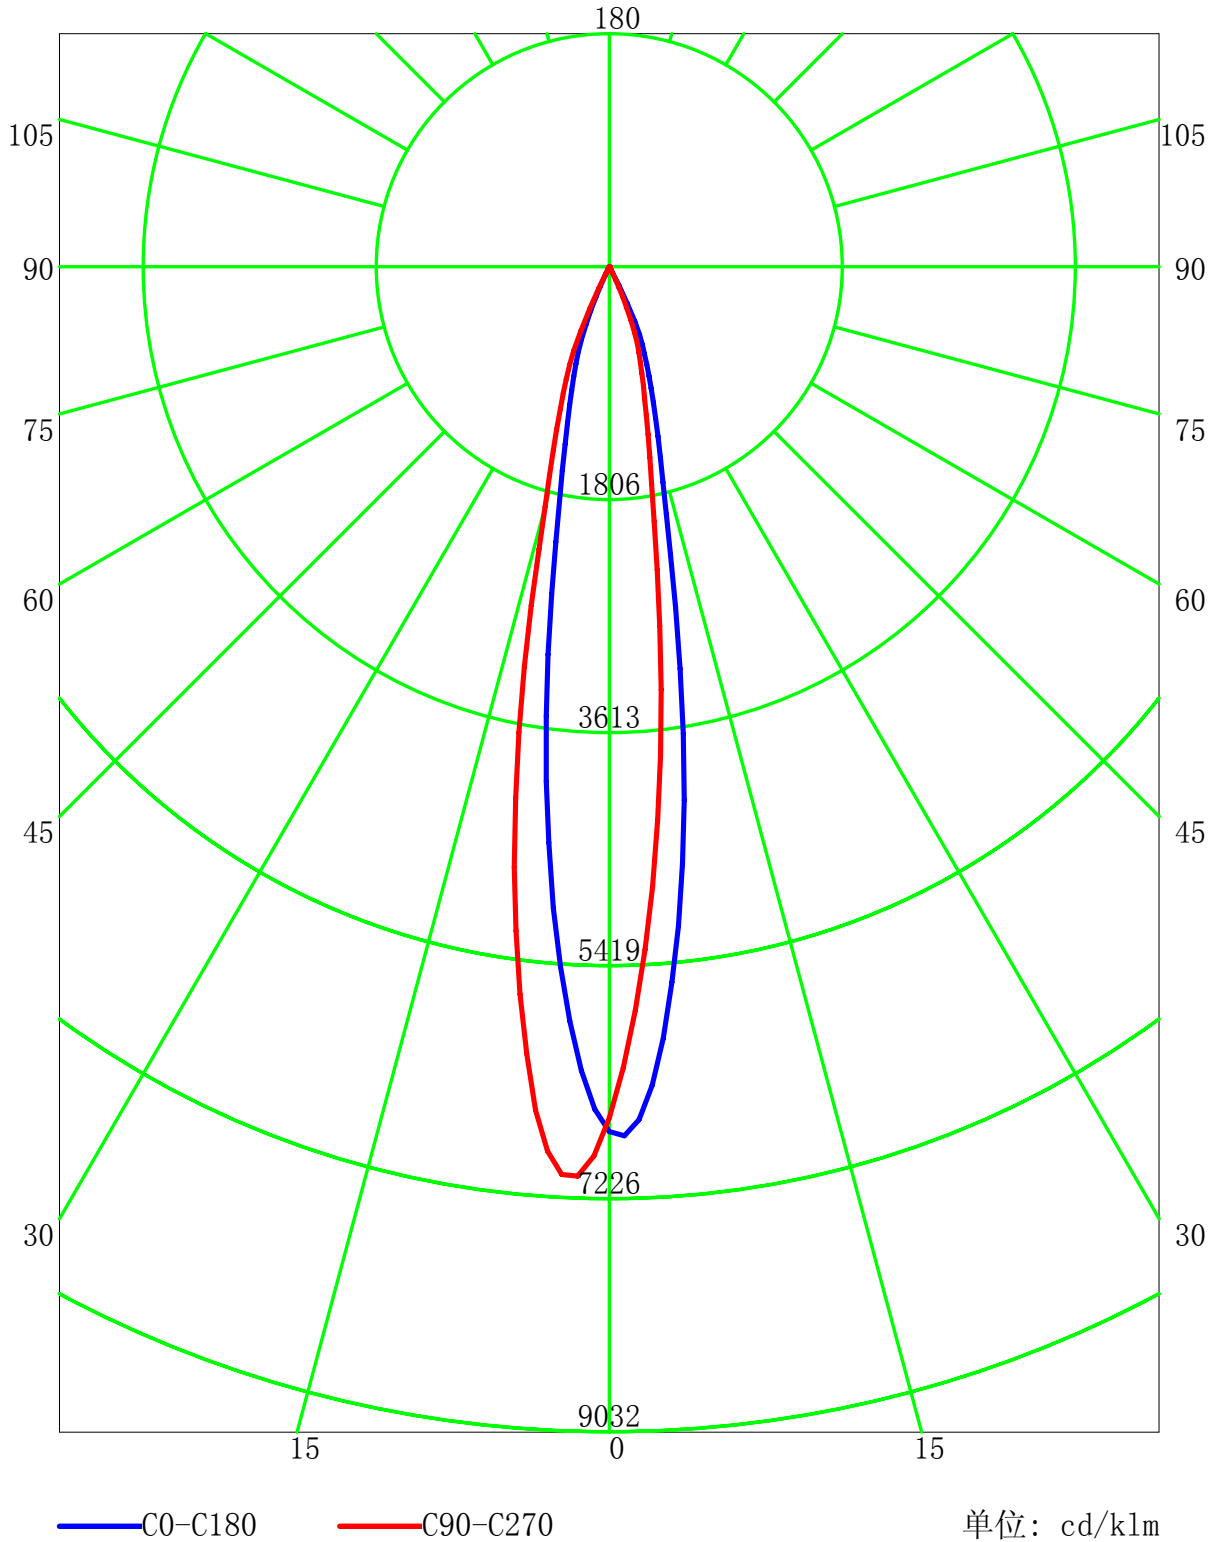

C 平面 (°): 0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验:




室内灯具利用系数表

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97
2	112	109	106	104	110	107	105	102	104	102	100	101	100	98	98	97	96	95
3	109	105	101	99	107	103	100	98	101	98	96	99	97	95	97	95	94	92
4	106	101	97	95	104	100	97	94	98	95	93	96	94	92	95	93	91	90
5	103	98	94	91	102	97	94	91	95	93	90	94	91	90	93	91	89	88
6	101	95	91	89	99	94	91	88	93	90	88	92	89	87	91	88	87	86
7	98	92	89	86	97	92	88	86	91	88	85	90	87	85	89	86	85	84
8	96	90	86	84	95	90	86	84	89	86	83	88	85	83	87	85	83	82
9	94	88	84	82	93	87	84	82	87	84	81	86	83	81	85	83	81	80
10	92	86	82	80	91	85	82	80	85	82	80	84	81	79	84	81	79	78

最大允许安装距离高度比(横向): 0.31
 最大允许安装距离高度比(纵向): 0.33
 最大允许安装距离高度比(对角): 0.34

灯具概算曲线

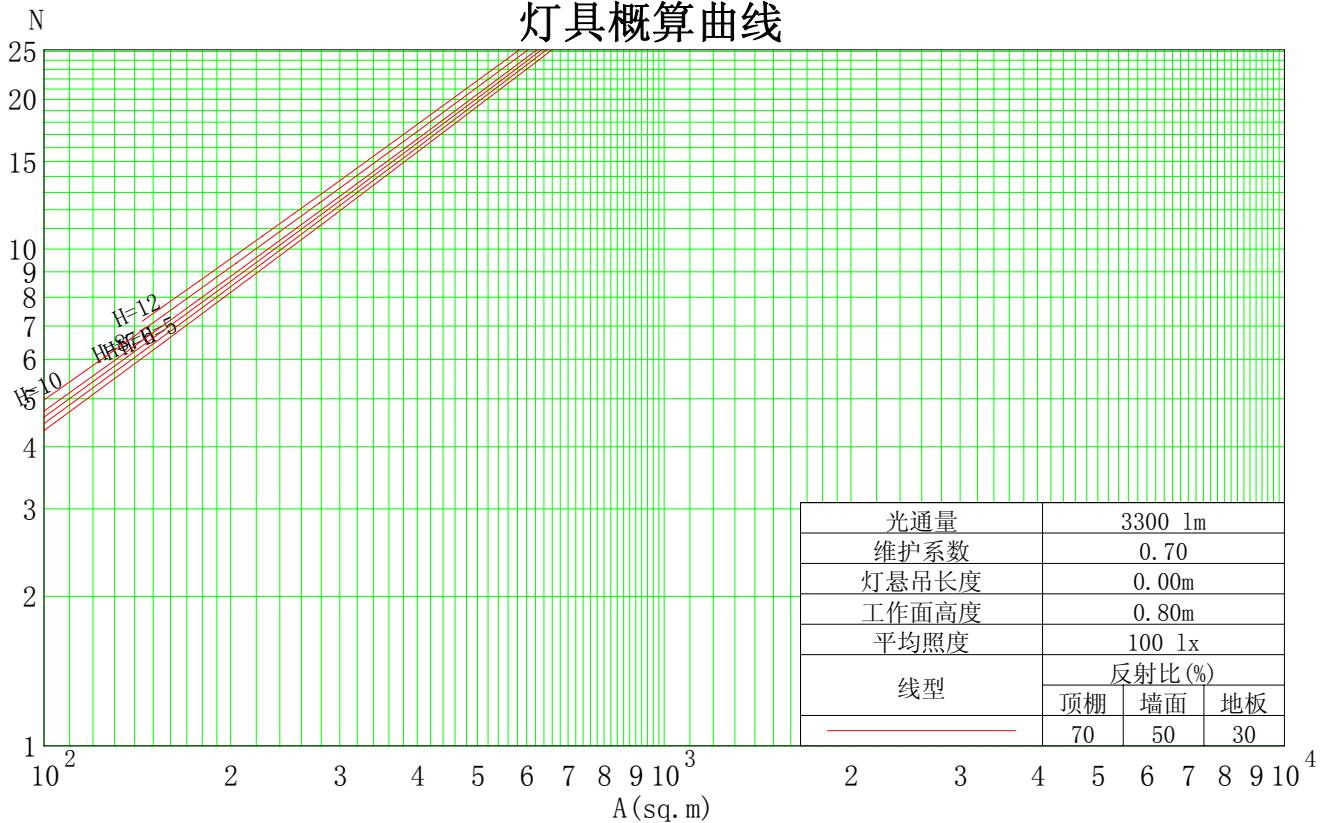


C 平面 (°): 0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验:



水平面等照度曲线

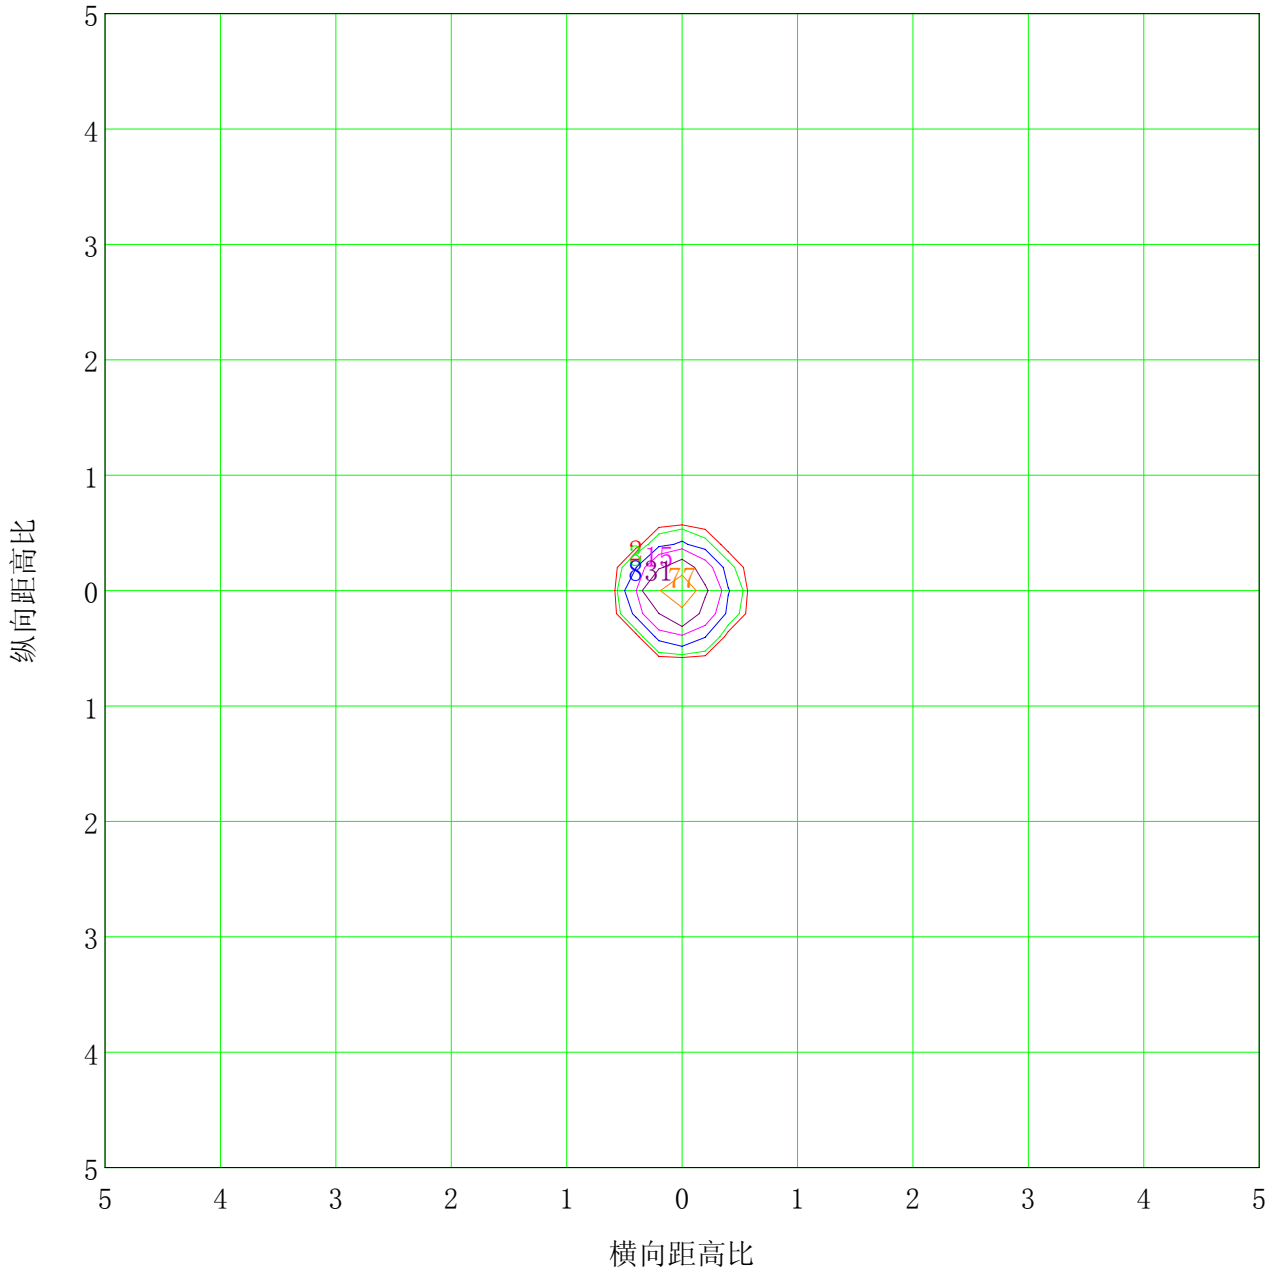

		安装高度: 10m	最大照度值(100%): 154 lx
— (1%):	2 lx	— (2%):	3 lx
— (5%):	8 lx	— (10%):	15 lx
— (20%):	31 lx	— (50%):	77 lx
— (100%):	154 lx		

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m



环境湿度:

核 验:



亮度限制曲线

眩光评价值	质量等级	使用照度 / lx							
		a	b	c	d	e	f	g	h
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

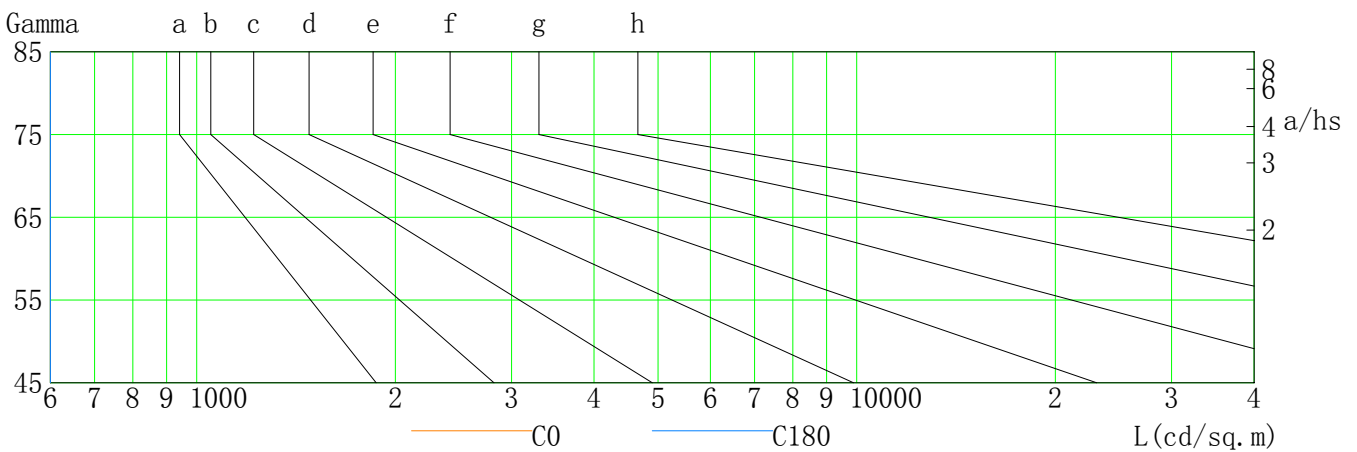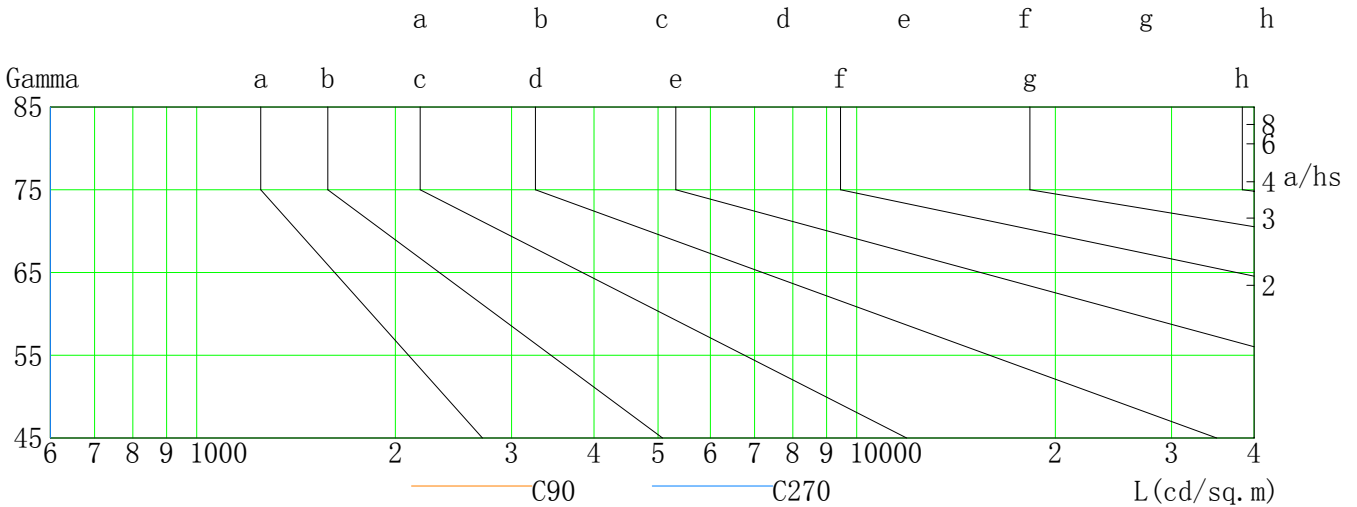

L (cd/sq. m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	0	0	0	0	0	0	0	0	0
C90	0	0	0	0	0	0	0	0	0
C180	0	0	0	0	0	0	0	0	0
C270	0	0	0	0	0	0	0	0	0

C 平面 (°): 0.0-360.0: 90.0


测试单位:
测试类型: TYPE C
环境温度:
测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600
测试距离: 8.650 m
环境湿度:
核 验:



照度距离关系图

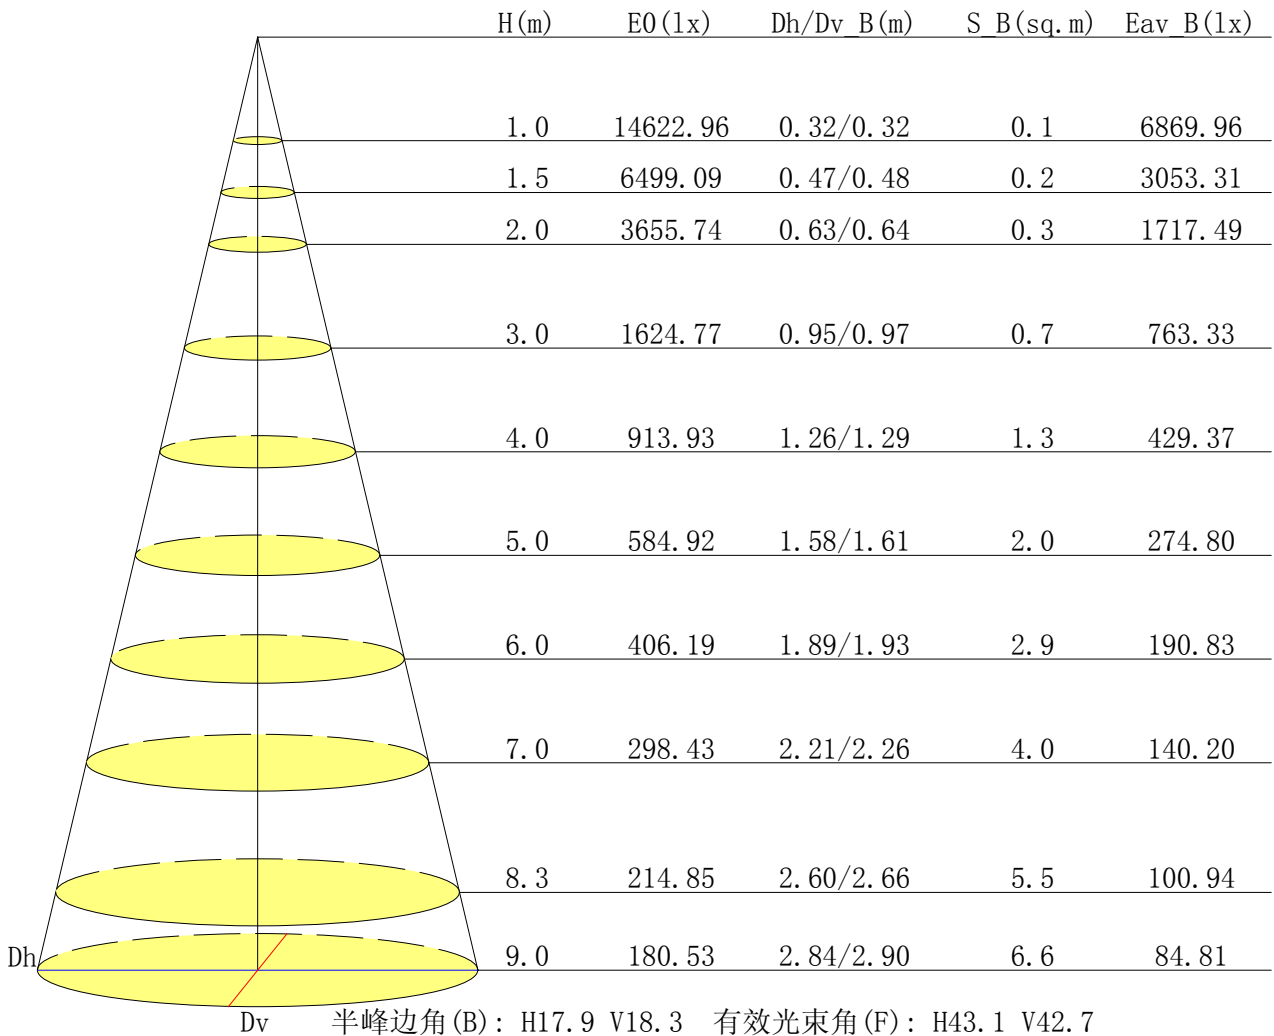


C 平面 (°): 0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验:



垂直面等照度曲线

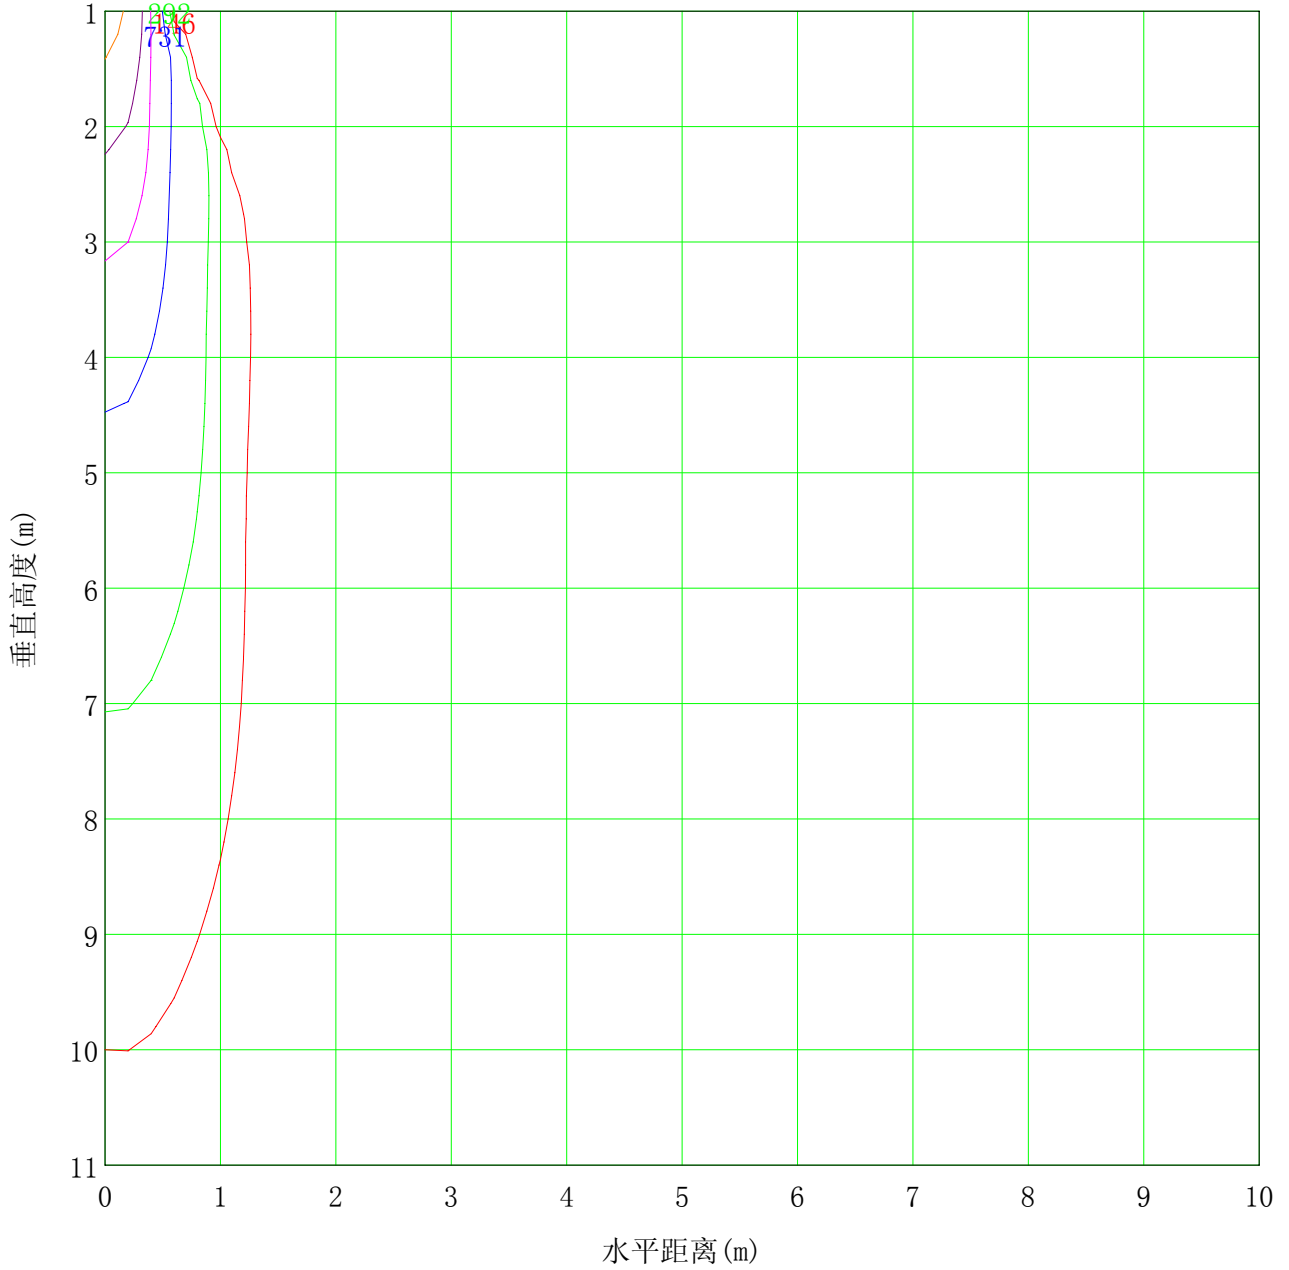

最低高度(米): 1m	最大高度(米): 11	最大照度值: 14623
— (1%): 146 lx	— (2%): 292 lx	
— (5%): 731 lx	— (10%): 1462 lx	
— (20%): 2925 lx	— (50%): 7311 lx	
— (100%): 14623 lx		

C 平面 (°): 0.0-360.0: 90.0


测试单位:
测试类型: TYPE C
环境温度:
测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600
测试距离: 8.650 m
环境湿度:
核 验:



灯具有效平均照度图

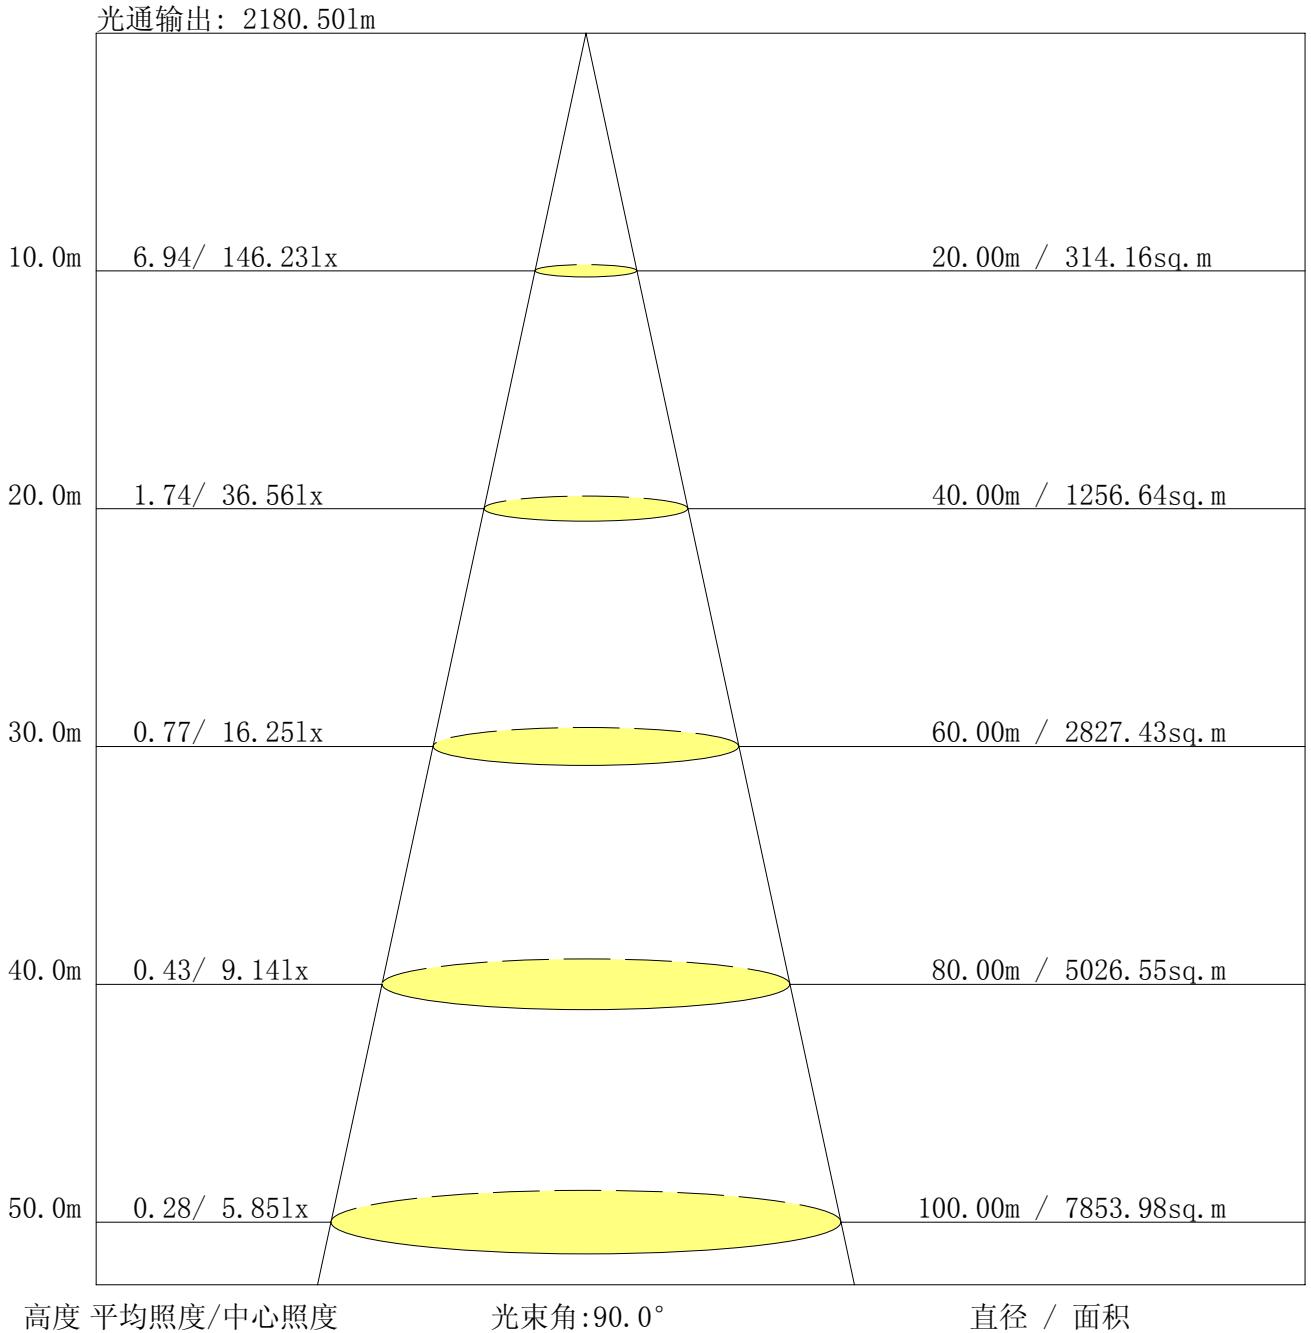

C 平面 (°): 0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验:



光强分布数据表格

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G0.0	14623.0	14388.8	14623.0	14388.8	14623.0					
G1.0	14695.4	13546.0	14244.9	15035.9	14695.4					
G2.0	14427.3	12584.3	13597.3	15383.2	14427.3					
G3.0	13854.8	11564.0	12769.4	15368.9	13854.8					
G4.0	13076.0	10510.3	11861.1	14987.8	13076.0					
G5.0	12141.3	9383.7	10884.1	14313.7	12141.3					
G6.0	11205.0	8305.1	9789.2	13376.3	11205.0					
G7.0	10165.6	7204.4	8767.8	12393.5	10165.6					
G8.0	9106.6	6142.3	7675.0	11336.6	9106.6					
G9.0	7992.7	5187.0	6637.1	10281.9	7992.7					
G10.0	6898.8	4373.3	5616.2	9119.3	6898.8					
G11.0	5873.2	3744.7	4740.2	8023.9	5873.2					
G12.0	4975.5	3299.0	4049.7	6915.2	4975.5					
G13.0	4293.5	2912.0	3538.5	5880.6	4293.5					
G14.0	3756.3	2589.0	3092.3	4918.9	3756.3					
G15.0	3339.7	2308.8	2728.6	4201.0	3339.7					
G16.0	2983.9	2091.0	2435.7	3677.6	2983.9					
G17.0	2680.4	1886.4	2181.9	3246.1	2680.4					
G18.0	2410.8	1701.3	1946.1	2887.7	2410.8					
G19.0	2171.9	1539.5	1741.0	2548.3	2171.9					
G20.0	1969.4	1384.6	1546.9	2279.2	1969.4					
G21.0	1772.2	1188.5	1317.5	2034.4	1772.2					
G22.0	1580.3	977.0	1058.4	1791.7	1580.3					
G23.0	1430.1	752.8	803.6	1546.9	1430.1					
G24.0	1260.9	567.8	563.0	1190.6	1260.9					
G25.0	1019.3	390.2	357.9	782.5	1019.3					
G26.0	686.8	245.8	164.4	407.6	686.8					
G27.0	363.7	130.1	65.0	132.7	363.7					
G28.0	124.8	68.2	52.3	66.1	124.8					
G29.0	63.4	56.0	43.9	51.3	63.4					
G30.0	50.8	47.6	36.0	41.8	50.8					
G31.0	41.8	39.1	29.6	33.3	41.8					
G32.0	34.4	32.3	22.2	25.4	34.4					
G33.0	27.5	25.4	17.5	18.5	27.5					
G34.0	21.7	21.1	13.2	13.2	21.7					
G35.0	17.5	17.5	11.1	10.1	17.5					
G36.0	14.3	13.8	7.9	7.4	14.3					

C 平面 (°):0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°):0.0-180.0:1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



光强分布数据表格 (续 1)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G37.0	11.1	10.6	4.2	4.2	11.1					
G38.0	6.9	5.8	0.0	1.1	6.9					
G39.0	3.2	2.6	0.0	0.0	3.2					
G40.0	0.0	0.0	0.0	0.0	0.0					
G41.0	0.0	0.0	0.0	0.0	0.0					
G42.0	0.0	0.0	0.0	0.0	0.0					
G43.0	0.0	0.0	0.0	0.0	0.0					
G44.0	0.0	0.0	0.0	0.0	0.0					
G45.0	0.0	0.0	0.0	0.0	0.0					
G46.0	0.0	0.0	0.0	0.0	0.0					
G47.0	0.0	0.0	0.0	0.0	0.0					
G48.0	0.0	0.0	0.0	0.0	0.0					
G49.0	0.0	0.0	0.0	0.0	0.0					
G50.0	0.0	0.0	0.0	0.0	0.0					
G51.0	0.0	0.0	0.0	0.0	0.0					
G52.0	0.0	0.0	0.0	0.0	0.0					
G53.0	0.0	0.0	0.0	0.0	0.0					
G54.0	0.0	0.0	0.0	0.0	0.0					
G55.0	0.0	0.0	0.0	0.0	0.0					
G56.0	0.0	0.0	0.0	0.0	0.0					
G57.0	0.0	0.0	0.0	0.0	0.0					
G58.0	0.0	0.0	0.0	0.0	0.0					
G59.0	0.0	0.0	0.0	0.0	0.0					
G60.0	0.0	0.0	0.0	0.0	0.0					
G61.0	0.0	0.0	0.0	0.0	0.0					
G62.0	0.0	0.0	0.0	0.0	0.0					
G63.0	0.0	0.0	0.0	0.0	0.0					
G64.0	0.0	0.0	0.0	0.0	0.0					
G65.0	0.0	0.0	0.0	0.0	0.0					
G66.0	0.0	0.0	0.0	0.0	0.0					
G67.0	0.0	0.0	0.0	0.0	0.0					
G68.0	0.0	0.0	0.0	0.0	0.0					
G69.0	0.0	0.0	0.0	0.0	0.0					
G70.0	0.0	0.0	0.0	0.0	0.0					
G71.0	0.0	0.0	0.0	0.0	0.0					
G72.0	0.0	0.0	0.0	0.0	0.0					
G73.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°):0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°):0.0-180.0:1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



光强分布数据表格 (续 2)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G74.0	0.0	0.0	0.0	0.0	0.0					
G75.0	0.0	0.0	0.0	0.0	0.0					
G76.0	0.0	0.0	0.0	0.0	0.0					
G77.0	0.0	0.0	0.0	0.0	0.0					
G78.0	0.0	0.0	0.0	0.0	0.0					
G79.0	0.0	0.0	0.0	0.0	0.0					
G80.0	0.0	0.0	0.0	0.0	0.0					
G81.0	0.0	0.0	0.0	0.0	0.0					
G82.0	0.0	0.0	0.0	0.0	0.0					
G83.0	0.0	0.0	0.0	0.0	0.0					
G84.0	0.0	0.0	0.0	0.0	0.0					
G85.0	0.0	0.0	0.0	0.0	0.0					
G86.0	0.0	0.0	0.0	0.0	0.0					
G87.0	0.0	0.0	0.0	0.0	0.0					
G88.0	0.0	0.0	0.0	0.0	0.0					
G89.0	0.0	0.0	0.0	0.0	0.0					
G90.0	0.0	0.0	0.0	0.0	0.0					
G91.0	0.0	0.0	0.0	0.0	0.0					
G92.0	0.0	0.0	0.0	0.0	0.0					
G93.0	0.0	0.0	0.0	0.0	0.0					
G94.0	0.0	0.0	0.0	0.0	0.0					
G95.0	0.0	0.0	0.0	0.0	0.0					
G96.0	0.0	0.0	0.0	0.0	0.0					
G97.0	0.0	0.0	0.0	0.0	0.0					
G98.0	0.0	0.0	0.0	0.0	0.0					
G99.0	0.0	0.0	0.0	0.0	0.0					
G100.0	0.0	0.0	0.0	0.0	0.0					
G101.0	0.0	0.0	0.0	0.0	0.0					
G102.0	0.0	0.0	0.0	0.0	0.0					
G103.0	0.0	0.0	0.0	0.0	0.0					
G104.0	0.0	0.0	0.0	0.0	0.0					
G105.0	0.0	0.0	0.0	0.0	0.0					
G106.0	0.0	0.0	0.0	0.0	0.0					
G107.0	0.0	0.0	0.0	0.0	0.0					
G108.0	0.0	0.0	0.0	0.0	0.0					
G109.0	0.0	0.0	0.0	0.0	0.0					
G110.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°):0.0-360.0: 90.0

测试单位:
测试类型: TYPE C
环境温度:
测试员:

Gamma 平面 (°):0.0-180.0:1.0

测试设备: GPM-1600
测试距离: 8.650 m
环境湿度:
核 验:



光强分布数据表格 (续 3)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G111.0	0.0	0.0	0.0	0.0	0.0					
G112.0	0.0	0.0	0.0	0.0	0.0					
G113.0	0.0	0.0	0.0	0.0	0.0					
G114.0	0.0	0.0	0.0	0.0	0.0					
G115.0	0.0	0.0	0.0	0.0	0.0					
G116.0	0.0	0.0	0.0	0.0	0.0					
G117.0	0.0	0.0	0.0	0.0	0.0					
G118.0	0.0	0.0	0.0	0.0	0.0					
G119.0	0.0	0.0	0.0	0.0	0.0					
G120.0	0.0	0.0	0.0	0.0	0.0					
G121.0	0.0	0.0	0.0	0.0	0.0					
G122.0	0.0	0.0	0.0	0.0	0.0					
G123.0	0.0	0.0	0.0	0.0	0.0					
G124.0	0.0	0.0	0.0	0.0	0.0					
G125.0	0.0	0.0	0.0	0.0	0.0					
G126.0	0.0	0.0	0.0	0.0	0.0					
G127.0	0.0	0.0	0.0	0.0	0.0					
G128.0	0.0	0.0	0.0	0.0	0.0					
G129.0	0.0	0.0	0.0	0.0	0.0					
G130.0	0.0	0.0	0.0	0.0	0.0					
G131.0	0.0	0.0	0.0	0.0	0.0					
G132.0	0.0	0.0	0.0	0.0	0.0					
G133.0	0.0	0.0	0.0	0.0	0.0					
G134.0	0.0	0.0	0.0	0.0	0.0					
G135.0	0.0	0.0	0.0	0.0	0.0					
G136.0	0.0	0.0	0.0	0.0	0.0					
G137.0	0.0	0.0	0.0	0.0	0.0					
G138.0	0.0	0.0	0.0	0.0	0.0					
G139.0	0.0	0.0	0.0	0.0	0.0					
G140.0	0.0	0.0	0.0	0.0	0.0					
G141.0	0.0	0.0	0.0	0.0	0.0					
G142.0	0.0	0.0	0.0	0.0	0.0					
G143.0	0.0	0.0	0.0	0.0	0.0					
G144.0	0.0	0.0	0.0	0.0	0.0					
G145.0	0.0	0.0	0.0	0.0	0.0					
G146.0	0.0	0.0	0.0	0.0	0.0					
G147.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°):0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°):0.0-180.0:1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验:



光强分布数据表格 (续 4)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G148.0	0.0	0.0	0.0	0.0	0.0					
G149.0	0.0	0.0	0.0	0.0	0.0					
G150.0	0.0	0.0	0.0	0.0	0.0					
G151.0	0.0	0.0	0.0	0.0	0.0					
G152.0	0.0	0.0	0.0	0.0	0.0					
G153.0	0.0	0.0	0.0	0.0	0.0					
G154.0	0.0	0.0	0.0	0.0	0.0					
G155.0	0.0	0.0	0.0	0.0	0.0					
G156.0	0.0	0.0	0.0	0.0	0.0					
G157.0	0.0	0.0	0.0	0.0	0.0					
G158.0	0.0	0.0	0.0	0.0	0.0					
G159.0	0.0	0.0	0.0	0.0	0.0					
G160.0	0.0	0.0	0.0	0.0	0.0					
G161.0	0.0	0.0	0.0	0.0	0.0					
G162.0	0.0	0.0	0.0	0.0	0.0					
G163.0	0.0	0.0	0.0	0.0	0.0					
G164.0	0.0	0.0	0.0	0.0	0.0					
G165.0	0.0	0.0	0.0	0.0	0.0					
G166.0	0.0	0.0	0.0	0.0	0.0					
G167.0	0.0	0.0	0.0	0.0	0.0					
G168.0	0.0	0.0	0.0	0.0	0.0					
G169.0	0.0	0.0	0.0	0.0	0.0					
G170.0	0.0	0.0	0.0	0.0	0.0					
G171.0	0.0	0.0	0.0	0.0	0.0					
G172.0	0.0	0.0	0.0	0.0	0.0					
G173.0	0.0	0.0	0.0	0.0	0.0					
G174.0	0.0	0.0	0.0	0.0	0.0					
G175.0	0.0	0.0	0.0	0.0	0.0					
G176.0	0.0	0.0	0.0	0.0	0.0					
G177.0	0.0	0.0	0.0	0.0	0.0					
G178.0	0.0	0.0	0.0	0.0	0.0					
G179.0	0.0	0.0	0.0	0.0	0.0					
G180.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°):0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°):0.0-180.0:1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验: