

报告编号:

测试时间: 2019-06-03 09:11

产品特征

灯具制造厂商:

灯具型号: XQ613035.01W-D24

电压: 221.5 V

功率: 36.60 W

光源个数: 1

电流: 0.170 A

功率因数: 0.969

光度结果

灯具CIE分类: 直接型

灯具光通量: 2027.4 lm

下射光通量比: 100%

水平扩散角 (25%, 50%, 75%, 100%): H38.1, H27.2, H17.9, H2

垂直扩散角 (25%, 50%, 75%, 100%): V37.1, V26.5, V17.6, V2

灯具光效等级 (LER): 55

峰值光强: 8810.05 cd

额定光通量: 2027.4 lm

灯具效率: 100%

上射光通量比: 0%


中心光强: 8719.9 cd

峰值光强位置: H0 V2

灯具实物照片



配光曲线

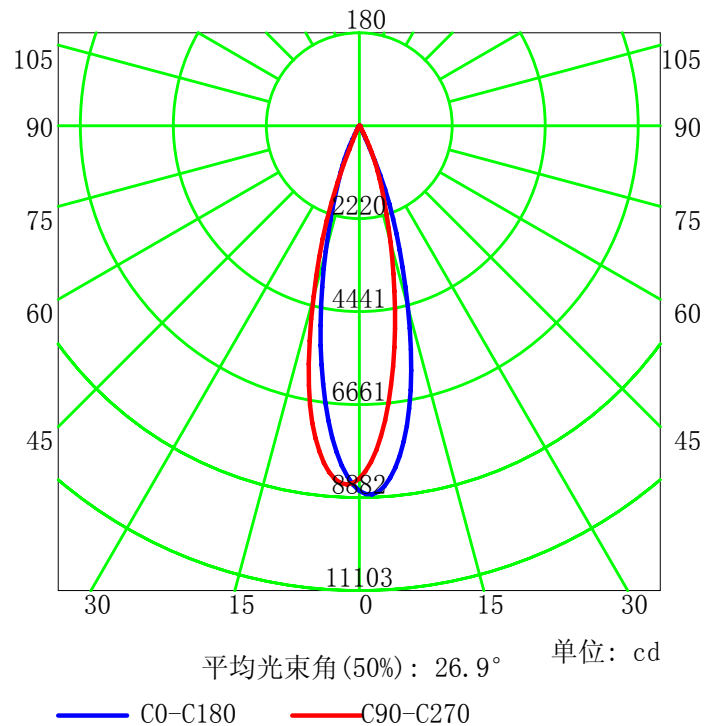

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600



测试距离: 8.650 m

环境湿度:

核 验:



配光曲线

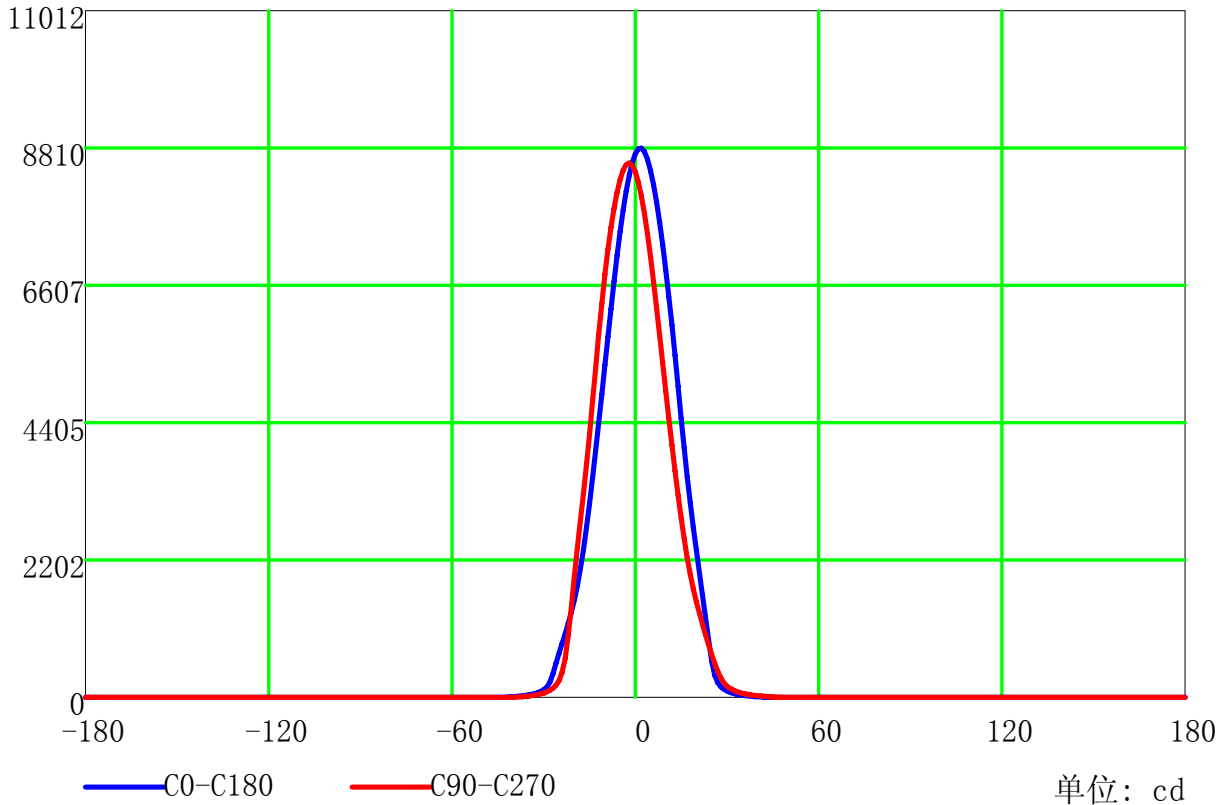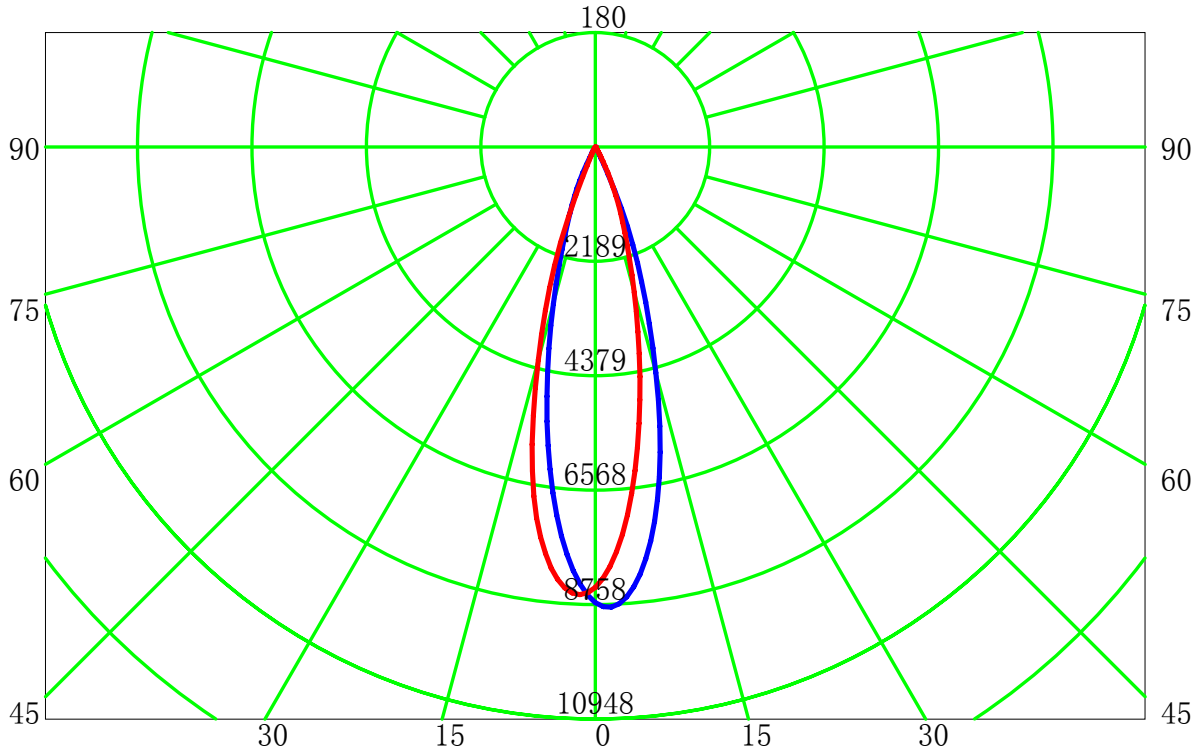

单位: cd

C 平面 (°):0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°):0.0-180.0:1.0

测试设备: GPM-1600


测试距离: 8.650 m

环境湿度:

核 验:



配光曲线(cd/klm)

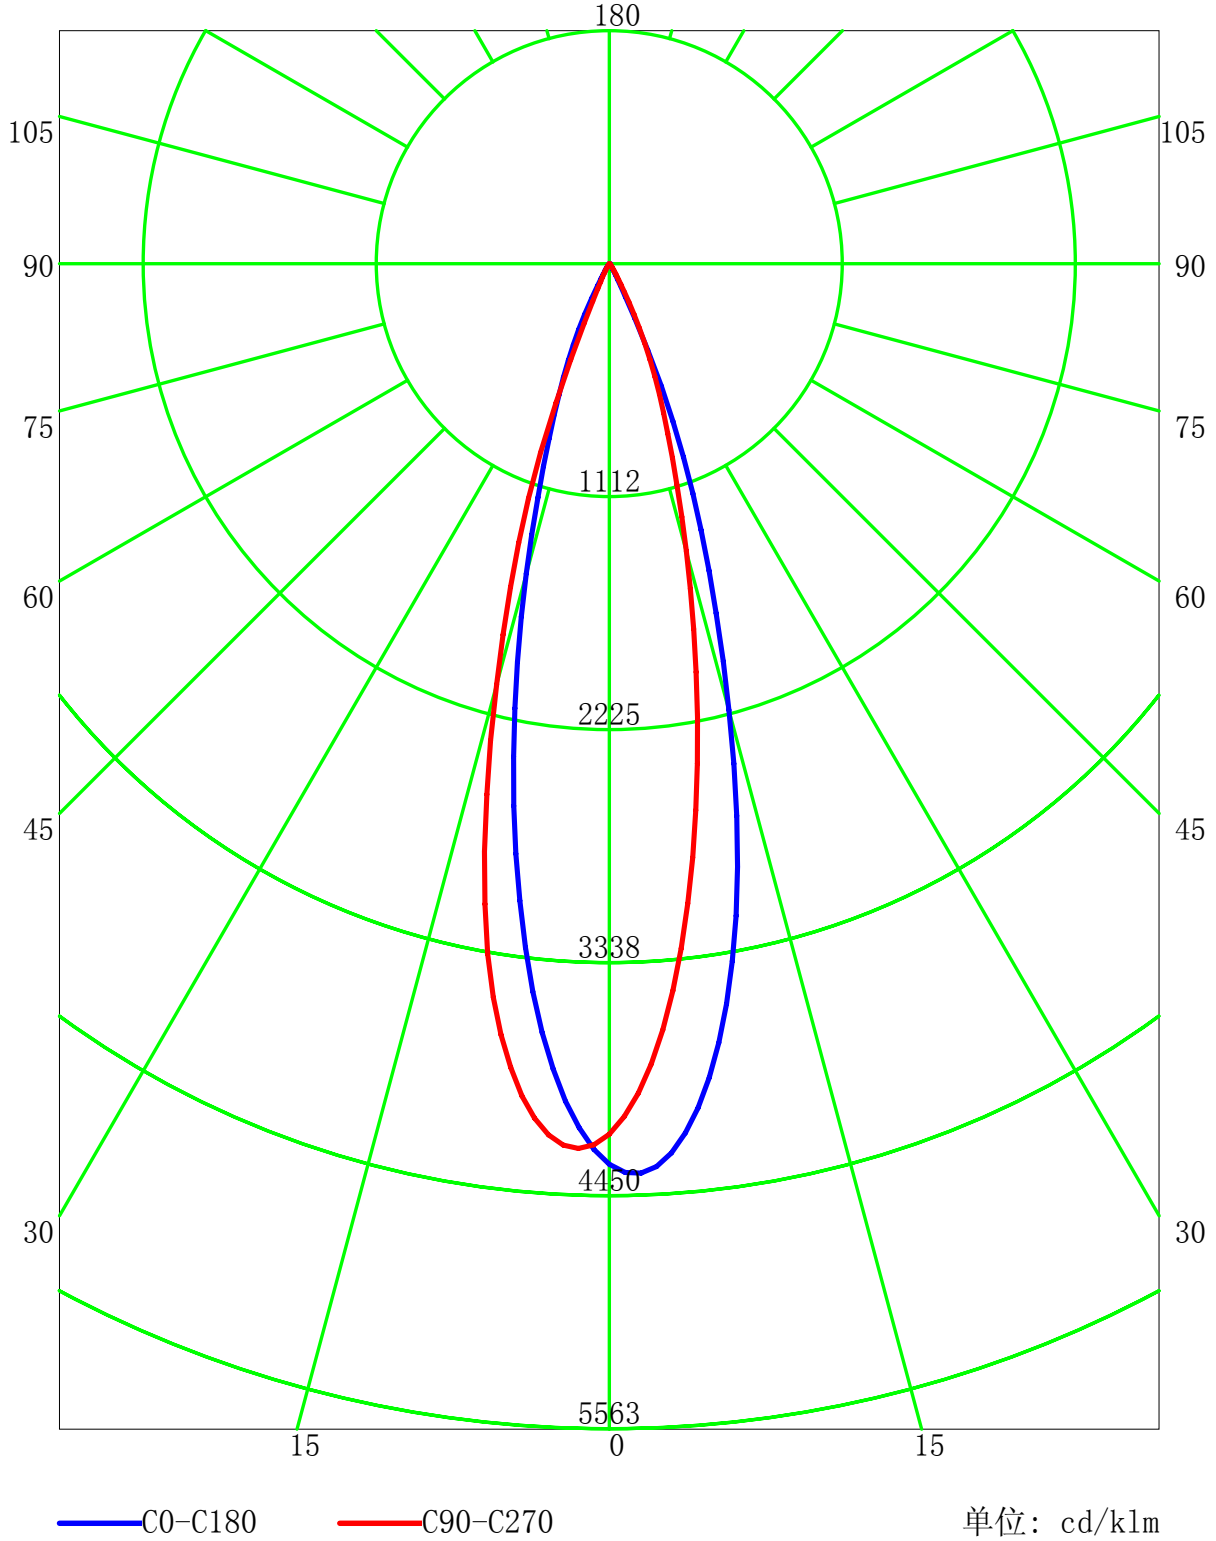

C 平面 (°): 0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验:




室内灯具利用系数表

| | | | | | | | | | | | | | | | | | | |
|------|----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RC | 0.8 | 0.8 | 0.8 | 0.8 | 0.7 | 0.7 | 0.7 | 0.7 | 0.5 | 0.5 | 0.5 | 0.3 | 0.3 | 0.3 | 0.1 | 0.1 | 0.1 | 0 |
| RW | 0.7 | 0.5 | 0.3 | 0.1 | 0.7 | 0.5 | 0.3 | 0.1 | 0.5 | 0.3 | 0.1 | 0.5 | 0.3 | 0.1 | 0.5 | 0.3 | 0.1 | 0 |
| RCCR | RF = 0.2 | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1 | 115 | 113 | 111 | 110 | 113 | 111 | 109 | 108 | 107 | 106 | 105 | 103 | 102 | 101 | 100 | 99 | 99 | 97 |
| 2 | 111 | 108 | 105 | 103 | 109 | 106 | 104 | 101 | 103 | 101 | 99 | 100 | 99 | 97 | 98 | 96 | 95 | 94 |
| 3 | 108 | 104 | 100 | 97 | 106 | 102 | 99 | 97 | 100 | 97 | 95 | 98 | 95 | 94 | 95 | 94 | 92 | 91 |
| 4 | 105 | 100 | 96 | 93 | 103 | 99 | 95 | 92 | 97 | 94 | 91 | 95 | 92 | 90 | 93 | 91 | 89 | 88 |
| 5 | 102 | 96 | 92 | 89 | 101 | 95 | 92 | 89 | 94 | 91 | 88 | 92 | 90 | 87 | 91 | 89 | 87 | 86 |
| 6 | 99 | 93 | 89 | 86 | 98 | 92 | 89 | 86 | 91 | 88 | 85 | 90 | 87 | 85 | 89 | 86 | 84 | 83 |
| 7 | 96 | 90 | 86 | 83 | 95 | 89 | 86 | 83 | 88 | 85 | 83 | 87 | 84 | 82 | 86 | 84 | 82 | 81 |
| 8 | 94 | 87 | 83 | 81 | 93 | 87 | 83 | 80 | 86 | 83 | 80 | 85 | 82 | 80 | 84 | 82 | 80 | 79 |
| 9 | 91 | 85 | 81 | 78 | 91 | 84 | 81 | 78 | 84 | 80 | 78 | 83 | 80 | 78 | 82 | 80 | 77 | 77 |
| 10 | 89 | 83 | 79 | 76 | 88 | 82 | 78 | 76 | 82 | 78 | 76 | 81 | 78 | 76 | 80 | 78 | 75 | 75 |

最大允许安装距离高度比(横向): 0.46
 最大允许安装距离高度比(纵向): 0.45
 最大允许安装距离高度比(对角): 0.46

灯具概算曲线

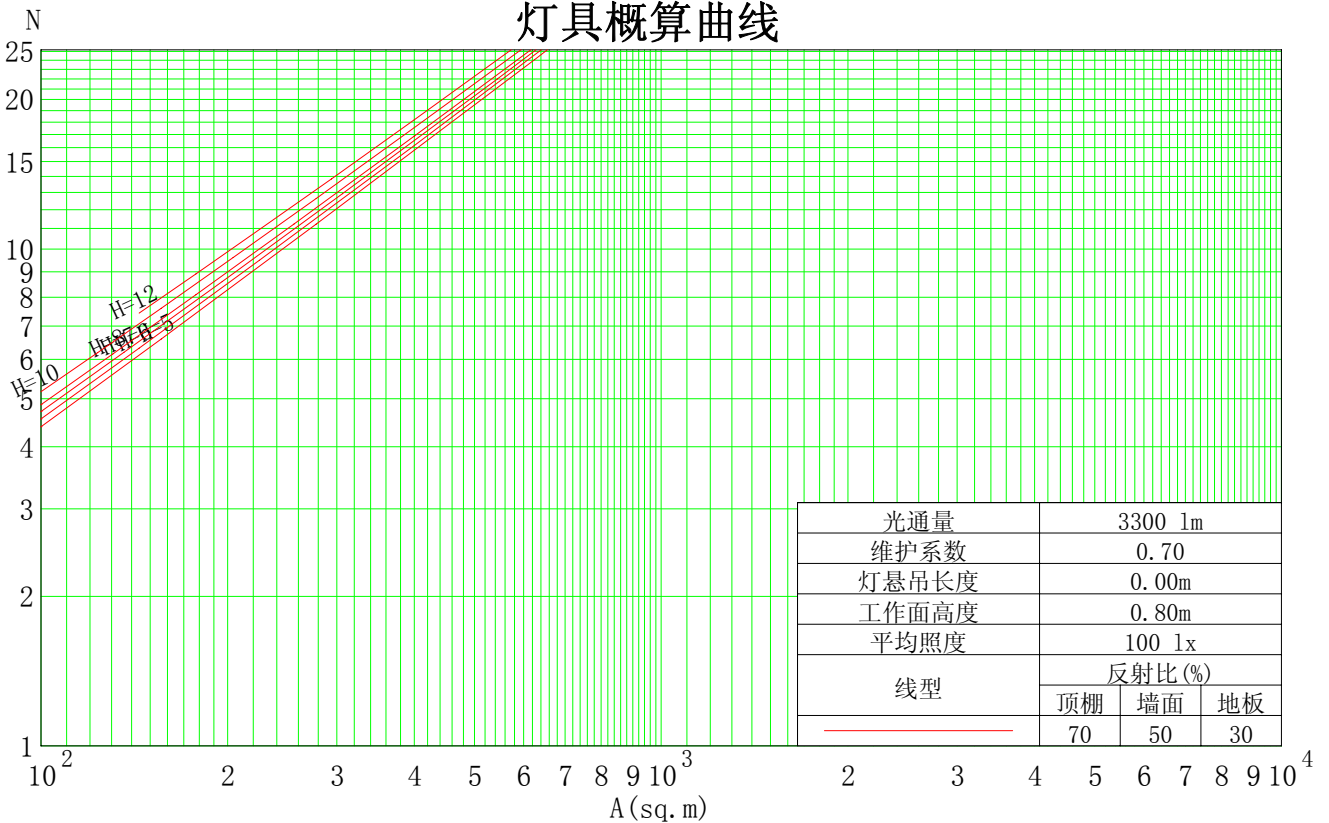


C 平面 (°): 0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验:



水平面等照度曲线

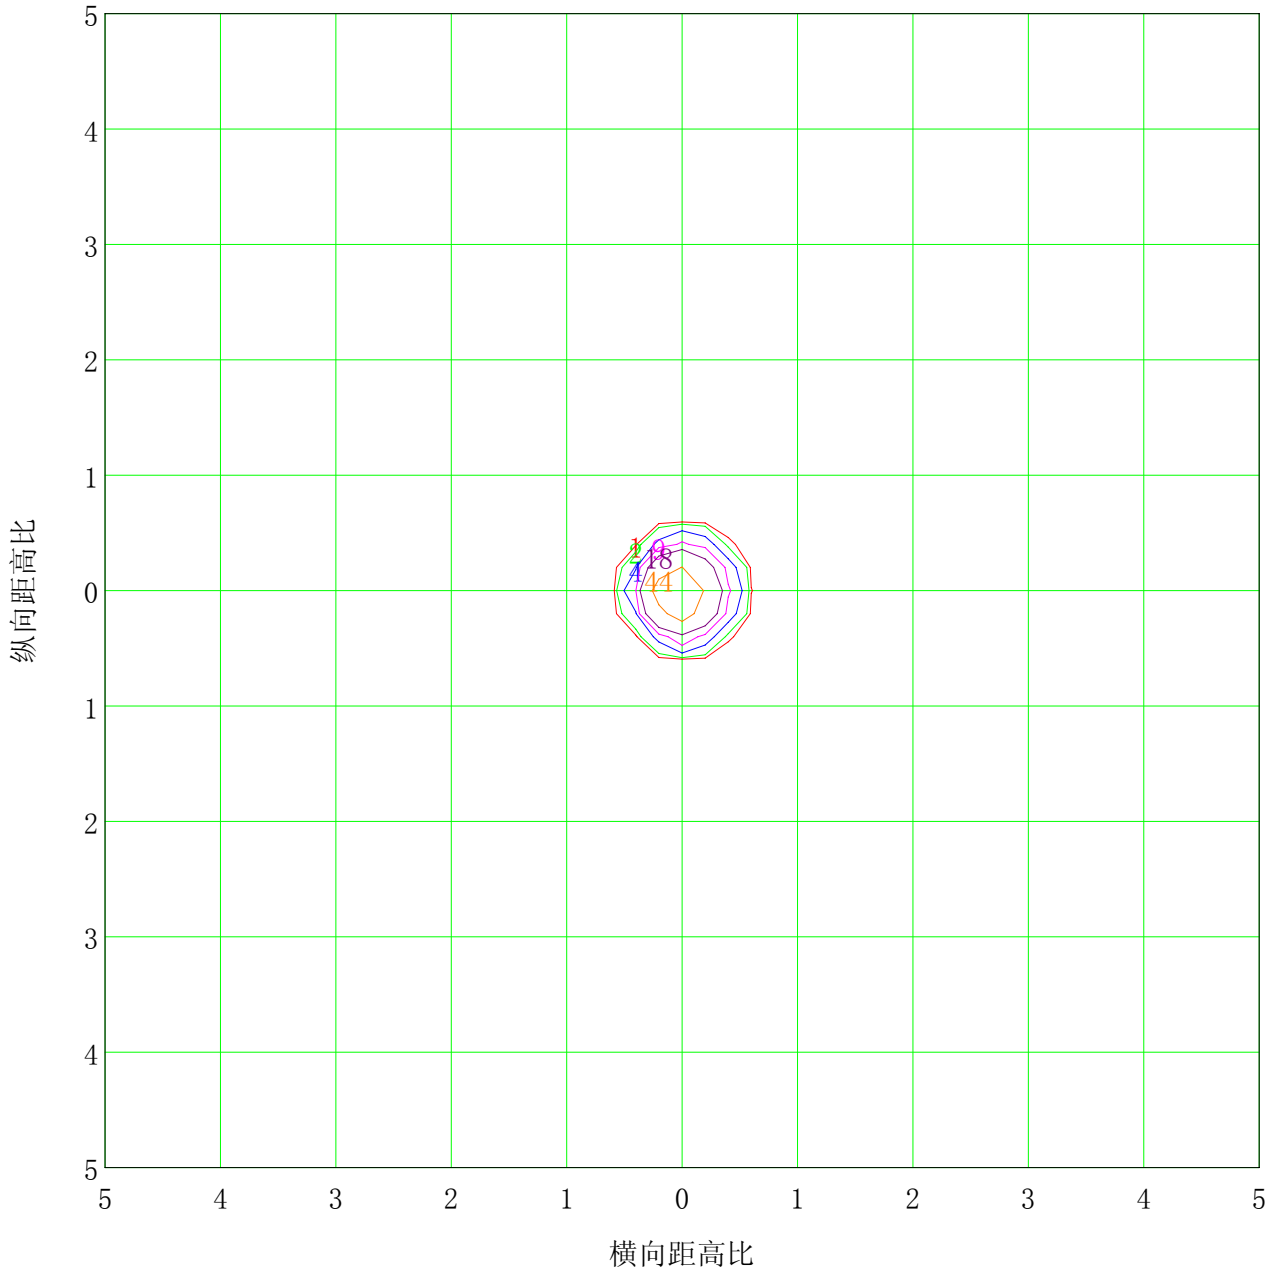

| | | | |
|-----------|-------|--------------------|-------|
| 安装高度: 10m | | 最大照度值(100%): 88 lx | |
| — (1%): | 1 lx | — (2%): | 2 lx |
| — (5%): | 4 lx | — (10%): | 9 lx |
| — (20%): | 18 lx | — (50%): | 44 lx |
| — (100%): | 88 lx | | |

C 平面 (°): 0.0-360.0: 90.0

测试单位:
测试类型: TYPE C
环境温度:
测试员:



Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600
测试距离: 8.650 m
环境湿度:
核 验:



亮度限制曲线

| 眩光评价值 | 质量等级 | 使用照度 / lx | | | | | | | |
|-------|------|-----------|------|------|-------|-------|-------|-------|-------|
| | | a | b | c | d | e | f | g | h |
| 1.15 | A | 2000 | 1000 | 500 | <=300 | | | | |
| 1.50 | B | | 2000 | 1000 | 500 | <=300 | | | |
| 1.85 | C | | | 2000 | 1000 | 500 | <=300 | | |
| 2.20 | D | | | | 2000 | 1000 | 500 | <=300 | |
| 2.55 | E | | | | | 2000 | 1000 | 500 | <=300 |

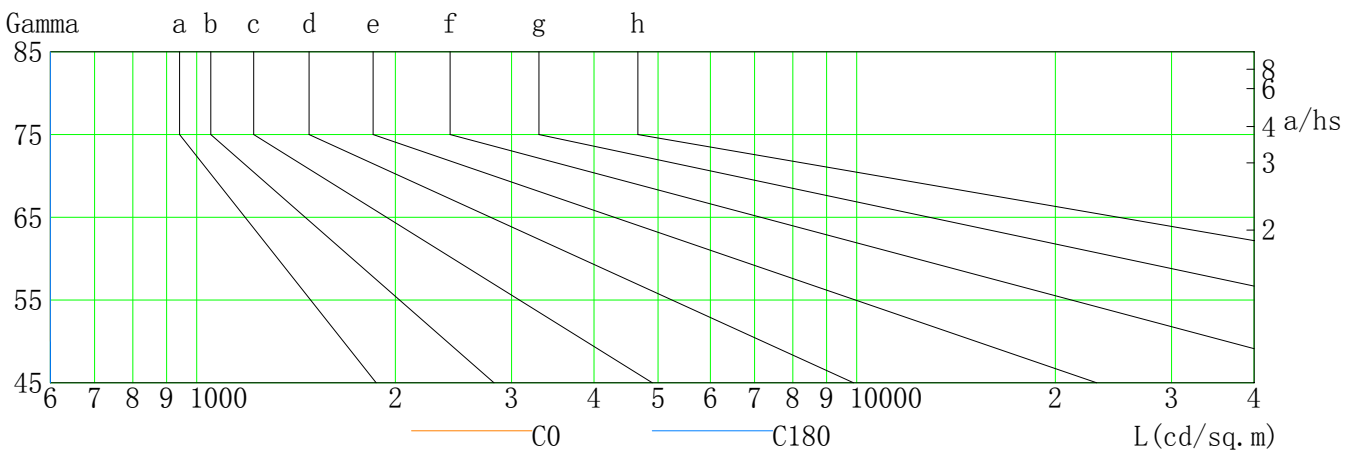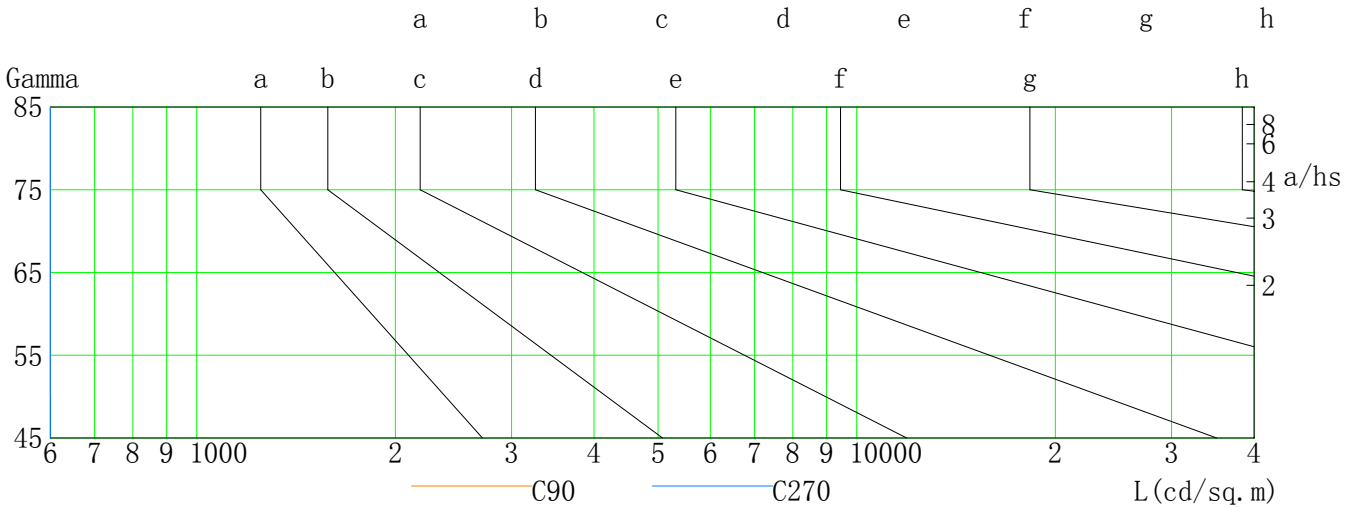

| L (cd/sq. m) | G45 | G50 | G55 | G60 | G65 | G70 | G75 | G80 | G85 |
|--------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| C0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| C90 | 8 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| C180 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| C270 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

C 平面 (°): 0.0-360.0: 90.0


测试单位:
测试类型: TYPE C
环境温度:
测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600
测试距离: 8.650 m
环境湿度:
核 验:



照度距离关系图

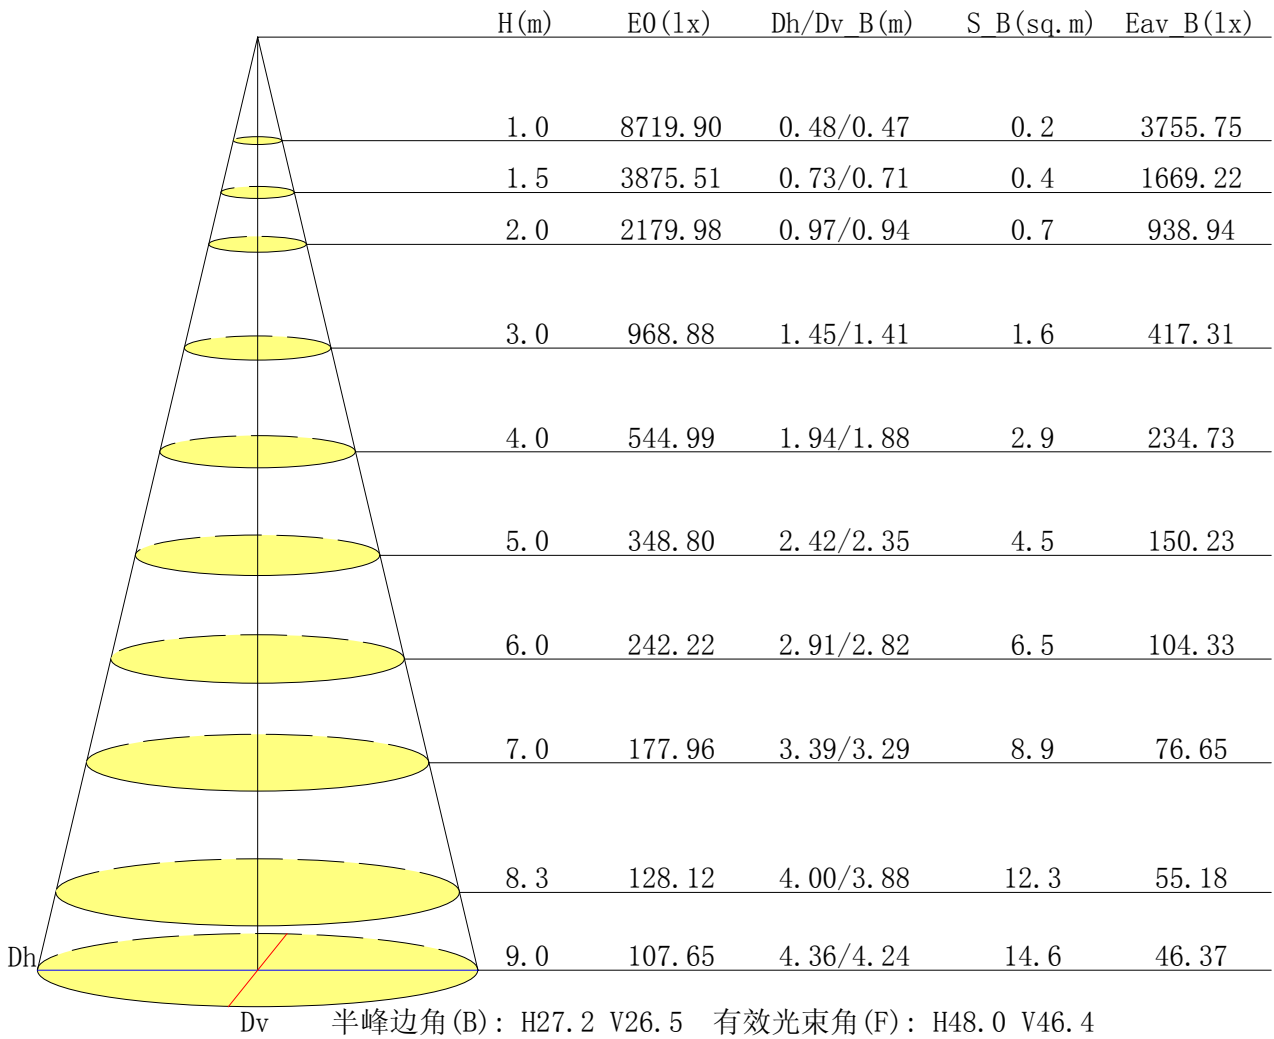


C 平面 (°): 0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验:



垂直面等照度曲线

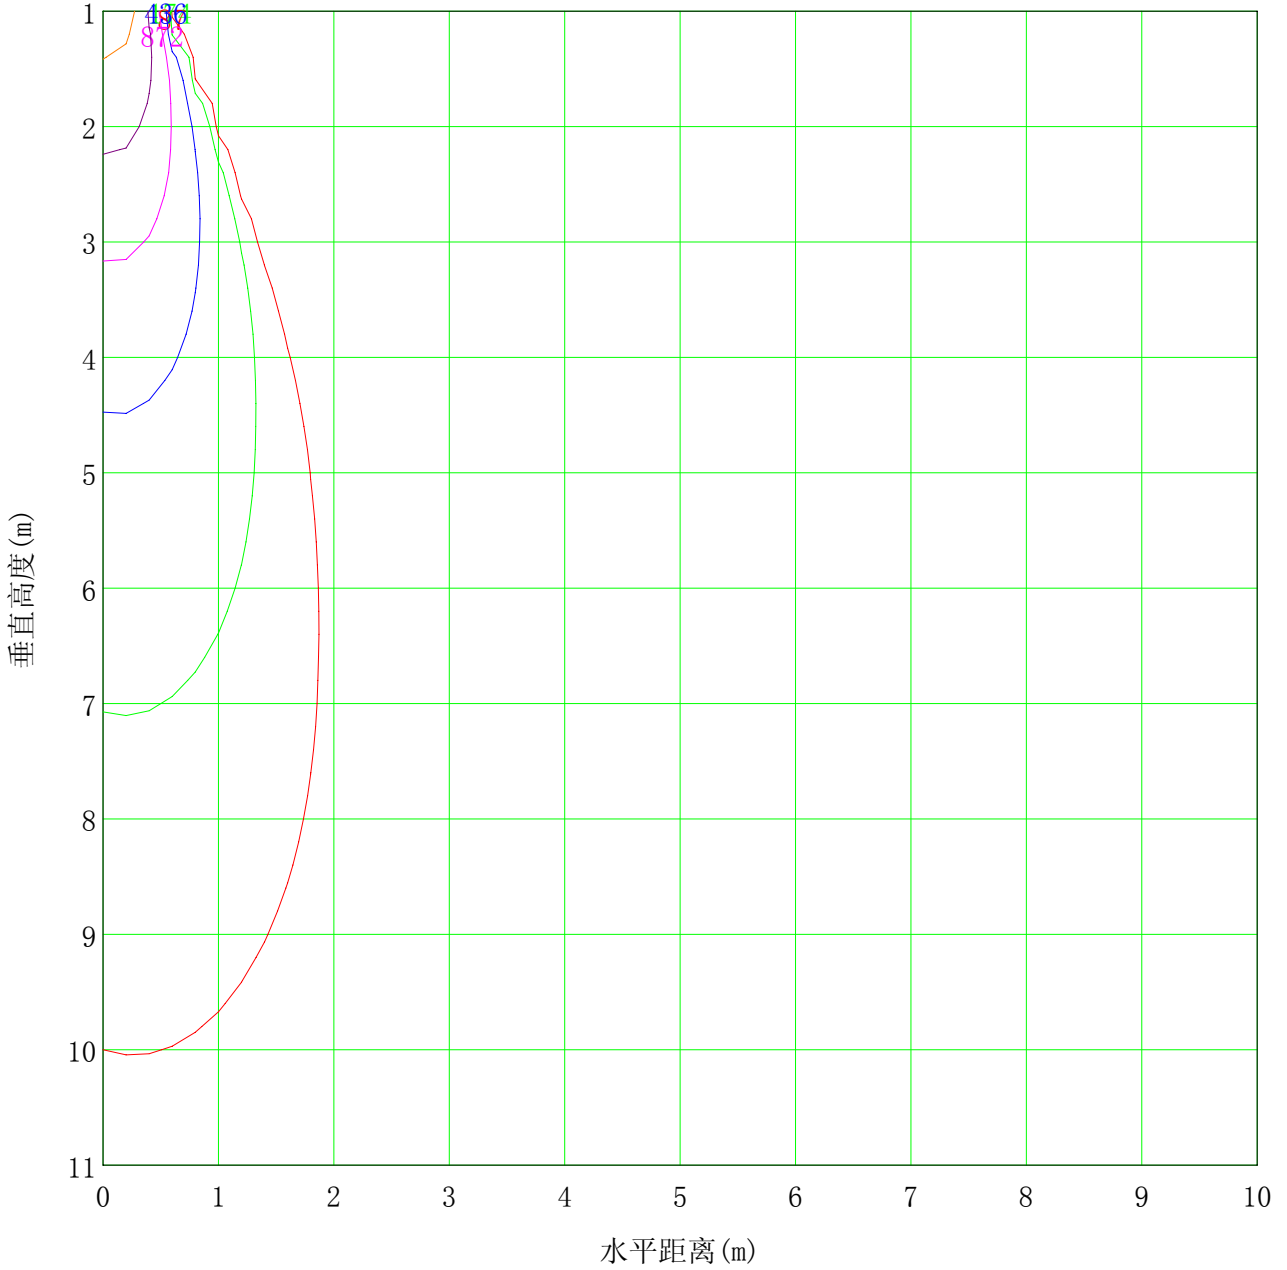

| | | |
|-------------------|------------------|-------------|
| 最低高度(米): 1m | 最大高度(米): 11 | 最大照度值: 8720 |
| — (1%): 87 lx | — (2%): 174 lx | |
| — (5%): 436 lx | — (10%): 872 lx | |
| — (20%): 1744 lx | — (50%): 4360 lx | |
| — (100%): 8720 lx | | |

C 平面 (°): 0.0-360.0: 90.0


测试单位:
测试类型: TYPE C
环境温度:
测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600
测试距离: 8.650 m
环境湿度:
核 验:



灯具有效平均照度图

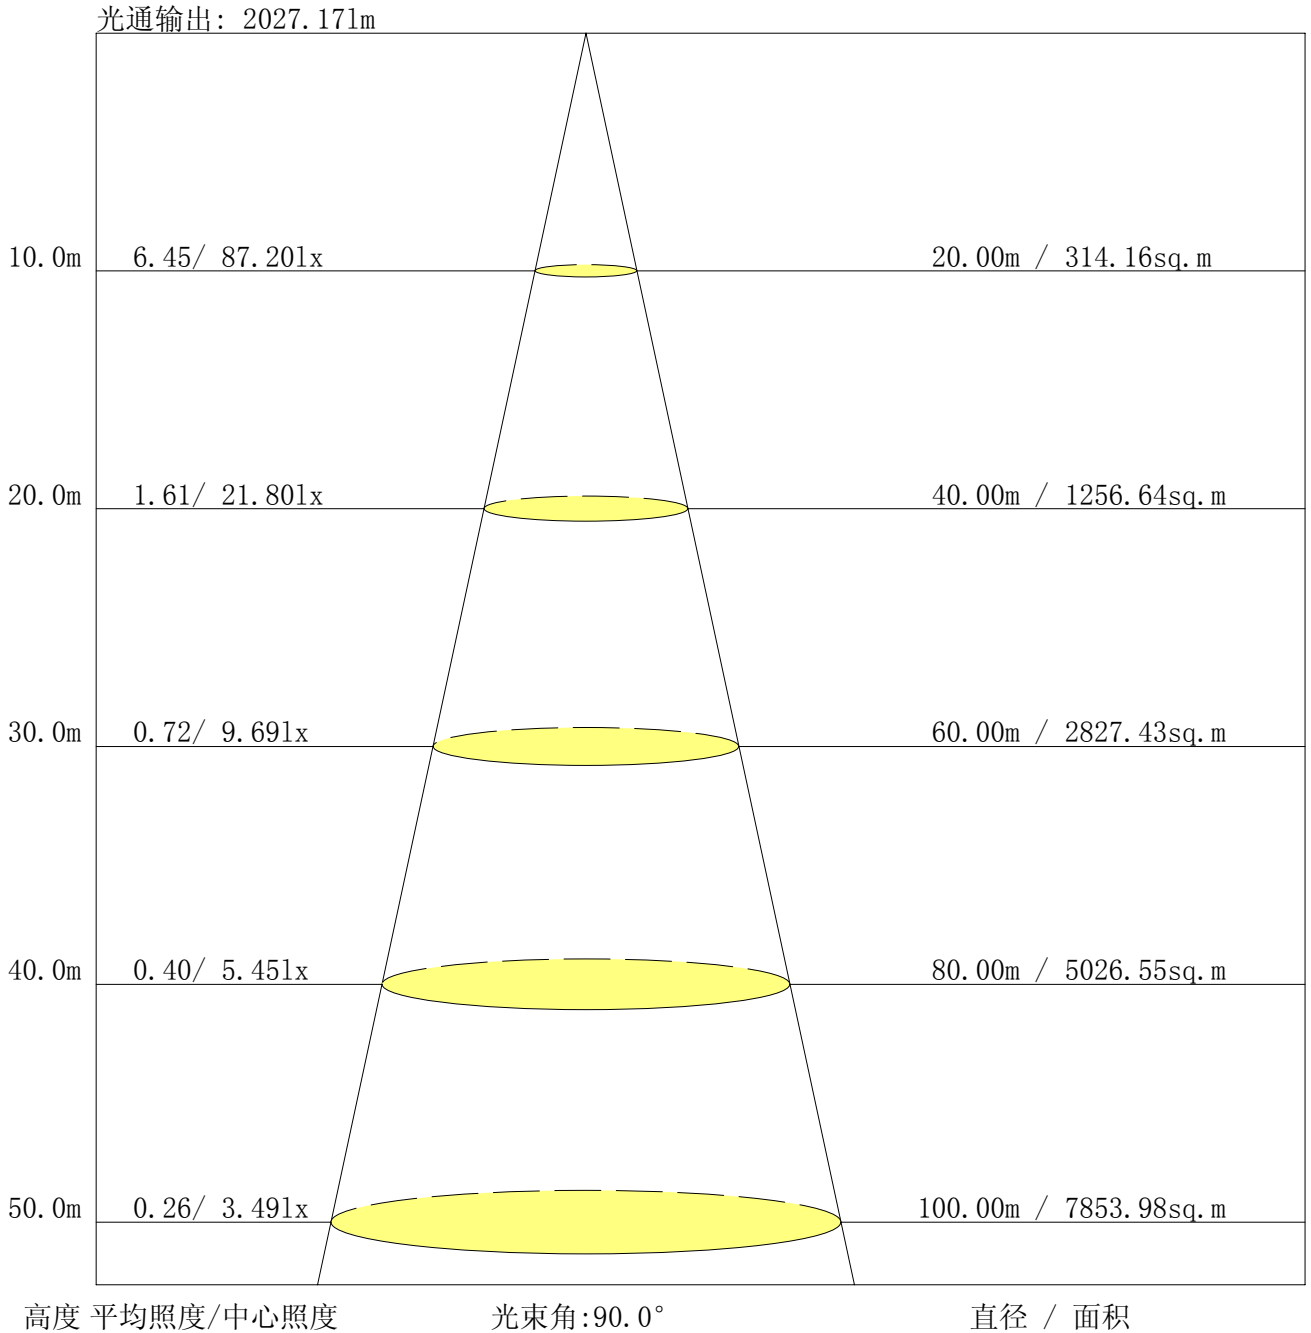

C 平面 (°): 0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验:



光强分布数据表格

单位: cd

| G\C | C0.0 | C90.0 | C180.0 | C270.0 | C360.0 | | | | | |
|-------|--------|--------|--------|--------|--------|--|--|--|--|--|
| G0.0 | 8719.9 | 8428.6 | 8719.9 | 8428.6 | 8719.9 | | | | | |
| G1.0 | 8799.5 | 8259.2 | 8576.9 | 8532.2 | 8799.5 | | | | | |
| G2.0 | 8810.0 | 8037.1 | 8371.0 | 8571.1 | 8810.0 | | | | | |
| G3.0 | 8753.5 | 7758.0 | 8120.4 | 8544.9 | 8753.5 | | | | | |
| G4.0 | 8630.3 | 7435.5 | 7814.3 | 8454.8 | 8630.3 | | | | | |
| G5.0 | 8447.9 | 7065.4 | 7470.4 | 8304.1 | 8447.9 | | | | | |
| G6.0 | 8219.8 | 6666.5 | 7086.5 | 8101.9 | 8219.8 | | | | | |
| G7.0 | 7940.1 | 6239.8 | 6669.9 | 7839.9 | 7940.1 | | | | | |
| G8.0 | 7615.2 | 5805.5 | 6227.7 | 7537.8 | 7615.2 | | | | | |
| G9.0 | 7257.0 | 5357.7 | 5784.4 | 7189.6 | 7257.0 | | | | | |
| G10.0 | 6856.8 | 4914.7 | 5330.5 | 6786.2 | 6856.8 | | | | | |
| G11.0 | 6432.0 | 4478.0 | 4862.3 | 6316.0 | 6432.0 | | | | | |
| G12.0 | 5971.3 | 4041.0 | 4400.5 | 5819.5 | 5971.3 | | | | | |
| G13.0 | 5487.0 | 3631.0 | 3958.3 | 5273.4 | 5487.0 | | | | | |
| G14.0 | 4989.0 | 3241.6 | 3523.7 | 4758.5 | 4989.0 | | | | | |
| G15.0 | 4474.8 | 2880.6 | 3107.6 | 4218.7 | 4474.8 | | | | | |
| G16.0 | 4006.4 | 2550.9 | 2730.7 | 3736.8 | 4006.4 | | | | | |
| G17.0 | 3538.0 | 2238.2 | 2367.7 | 3272.3 | 3538.0 | | | | | |
| G18.0 | 3126.1 | 1975.7 | 2066.6 | 2840.1 | 3126.1 | | | | | |
| G19.0 | 2727.8 | 1741.0 | 1789.9 | 2403.4 | 2727.8 | | | | | |
| G20.0 | 2369.1 | 1536.9 | 1563.1 | 1943.7 | 2369.1 | | | | | |
| G21.0 | 2005.6 | 1353.4 | 1364.3 | 1442.3 | 2005.6 | | | | | |
| G22.0 | 1644.5 | 1180.0 | 1189.3 | 1000.5 | 1644.5 | | | | | |
| G23.0 | 1289.2 | 1008.5 | 1017.5 | 624.6 | 1289.2 | | | | | |
| G24.0 | 917.5 | 842.2 | 860.2 | 398.6 | 917.5 | | | | | |
| G25.0 | 583.7 | 686.8 | 702.4 | 265.7 | 583.7 | | | | | |
| G26.0 | 356.3 | 546.1 | 545.6 | 193.5 | 356.3 | | | | | |
| G27.0 | 235.8 | 417.1 | 376.4 | 144.3 | 235.8 | | | | | |
| G28.0 | 171.0 | 314.8 | 241.4 | 112.3 | 171.0 | | | | | |
| G29.0 | 131.4 | 234.7 | 163.6 | 88.0 | 131.4 | | | | | |
| G30.0 | 103.6 | 180.0 | 122.7 | 69.0 | 103.6 | | | | | |
| G31.0 | 83.0 | 143.8 | 96.0 | 54.7 | 83.0 | | | | | |
| G32.0 | 66.1 | 120.0 | 76.4 | 43.1 | 66.1 | | | | | |
| G33.0 | 53.7 | 99.4 | 61.3 | 33.6 | 53.7 | | | | | |
| G34.0 | 42.8 | 81.4 | 50.0 | 25.9 | 42.8 | | | | | |
| G35.0 | 34.4 | 66.6 | 40.2 | 19.6 | 34.4 | | | | | |
| G36.0 | 26.7 | 55.5 | 32.8 | 14.3 | 26.7 | | | | | |

C 平面 (°):0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°):0.0-180.0:1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



光强分布数据表格 (续 1)

单位: cd

| G\C | C0.0 | C90.0 | C180.0 | C270.0 | C360.0 | | | | | |
|-------|------|-------|--------|--------|--------|--|--|--|--|--|
| G37.0 | 20.9 | 46.5 | 25.9 | 10.1 | 20.9 | | | | | |
| G38.0 | 15.9 | 38.3 | 20.9 | 6.1 | 15.9 | | | | | |
| G39.0 | 11.6 | 32.0 | 16.1 | 2.9 | 11.6 | | | | | |
| G40.0 | 9.0 | 27.0 | 11.9 | 0.0 | 9.0 | | | | | |
| G41.0 | 6.9 | 22.5 | 8.5 | 0.0 | 6.9 | | | | | |
| G42.0 | 4.8 | 18.0 | 5.0 | 0.0 | 4.8 | | | | | |
| G43.0 | 3.4 | 14.5 | 1.9 | 0.0 | 3.4 | | | | | |
| G44.0 | 2.4 | 10.6 | 0.0 | 0.0 | 2.4 | | | | | |
| G45.0 | 1.1 | 7.7 | 0.0 | 0.0 | 1.1 | | | | | |
| G46.0 | 0.0 | 4.8 | 0.0 | 0.0 | 0.0 | | | | | |
| G47.0 | 0.0 | 2.6 | 0.0 | 0.0 | 0.0 | | | | | |
| G48.0 | 0.0 | 0.5 | 0.0 | 0.0 | 0.0 | | | | | |
| G49.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G50.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G51.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G52.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G53.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G54.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G55.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G56.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G57.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G58.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G59.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G60.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G61.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G62.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G63.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G64.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G65.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G66.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G67.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G68.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G69.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G70.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G71.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G72.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G73.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |

C 平面 (°):0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°):0.0-180.0:1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



光强分布数据表格 (续 2)

单位: cd

| G\C | C0.0 | C90.0 | C180.0 | C270.0 | C360.0 | | | | | |
|--------|------|-------|--------|--------|--------|--|--|--|--|--|
| G74.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G75.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G76.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G77.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G78.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G79.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G80.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G81.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G82.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G83.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G84.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G85.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G86.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G87.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G88.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G89.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G90.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G91.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G92.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G93.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G94.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G95.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G96.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G97.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G98.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G99.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G100.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G101.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G102.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G103.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G104.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G105.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G106.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G107.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G108.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G109.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G110.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |

C 平面 (°):0.0-360.0: 90.0

测试单位:
测试类型: TYPE C
环境温度:
测试员:

Gamma 平面 (°):0.0-180.0:1.0

测试设备: GPM-1600
测试距离: 8.650 m
环境湿度:
核 验:



光强分布数据表格 (续 3)

单位: cd

| G\C | C0.0 | C90.0 | C180.0 | C270.0 | C360.0 | | | | | |
|--------|------|-------|--------|--------|--------|--|--|--|--|--|
| G111.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G112.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G113.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G114.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G115.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G116.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G117.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G118.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G119.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G120.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G121.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G122.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G123.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G124.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G125.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G126.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G127.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G128.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G129.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G130.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G131.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G132.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G133.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G134.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G135.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G136.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G137.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G138.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G139.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G140.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G141.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G142.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G143.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G144.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G145.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G146.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G147.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |

C 平面 (°):0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°):0.0-180.0:1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验:



光强分布数据表格 (续 4)

单位: cd

| G\C | C0.0 | C90.0 | C180.0 | C270.0 | C360.0 | | | | | |
|--------|------|-------|--------|--------|--------|--|--|--|--|--|
| G148.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G149.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G150.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G151.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G152.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G153.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G154.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G155.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G156.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G157.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G158.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G159.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G160.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G161.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G162.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G163.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G164.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G165.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G166.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G167.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G168.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G169.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G170.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G171.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G172.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G173.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G174.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G175.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G176.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G177.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G178.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G179.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G180.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

C 平面 (°):0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°):0.0-180.0:1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验: