

报告编号:

测试时间: 2019-06-03 08:56

产品特征

灯具制造厂商:

灯具型号: XQ613030.01W-D24

电压: 221.5 V

功率: 27.90 W

光源个数: 1

电流: 0.131 A

功率因数: 0.961

光度结果

灯具CIE分类: 直接型

灯具光通量: 1694 lm

下射光通量比: 100%

水平扩散角 (25%, 50%, 75%, 100%): H36.4, H26.2, H17.1, H1

垂直扩散角 (25%, 50%, 75%, 100%): V35.1, V25.1, V17, V1

灯具光效等级 (LER): 61

峰值光强: 8098.34 cd

额定光通量: 1694.0 lm

灯具效率: 100%

上射光通量比: 0%


中心光强: 8017.97 cd

峰值光强位置: H0 V1

灯具实物照片



配光曲线

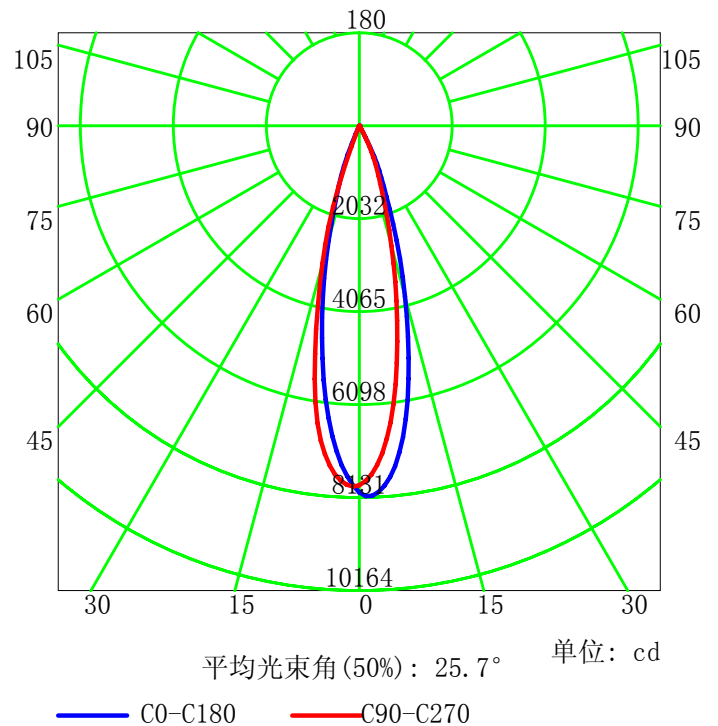

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600



测试距离: 8.257 m

环境湿度:

核 验:



配光曲线

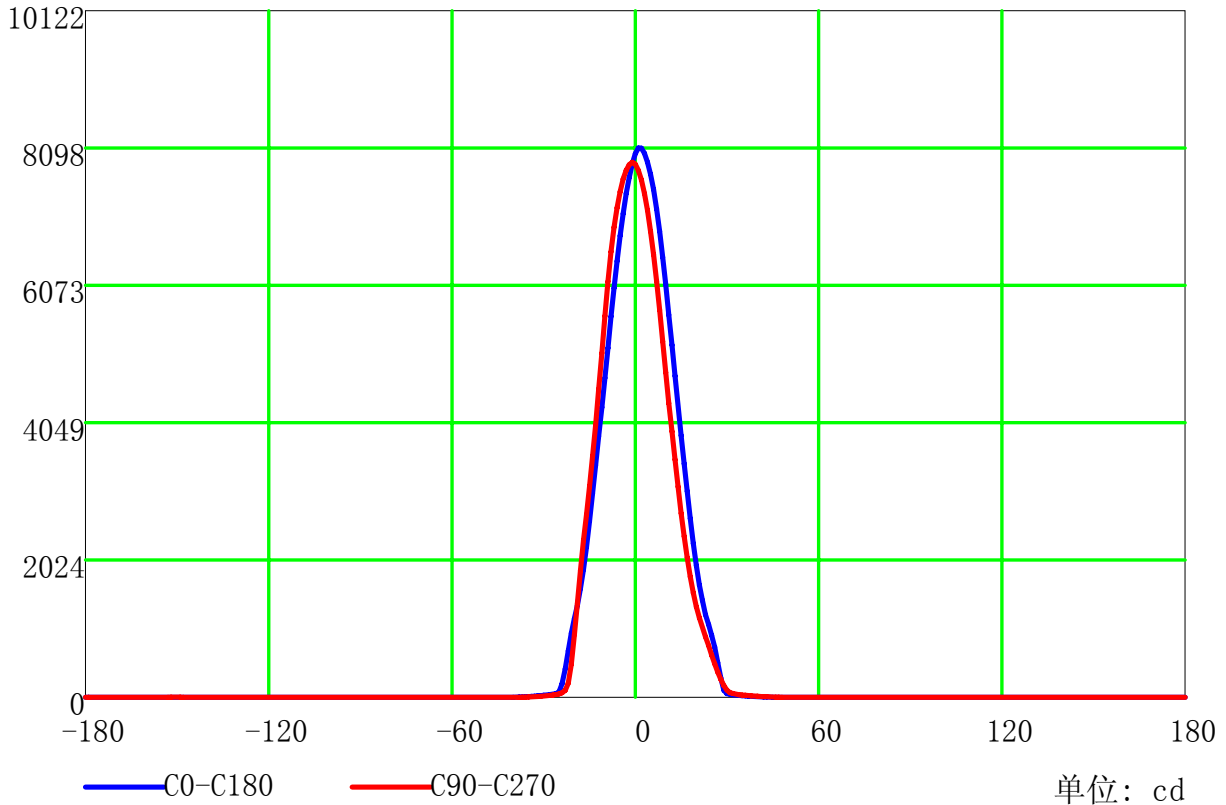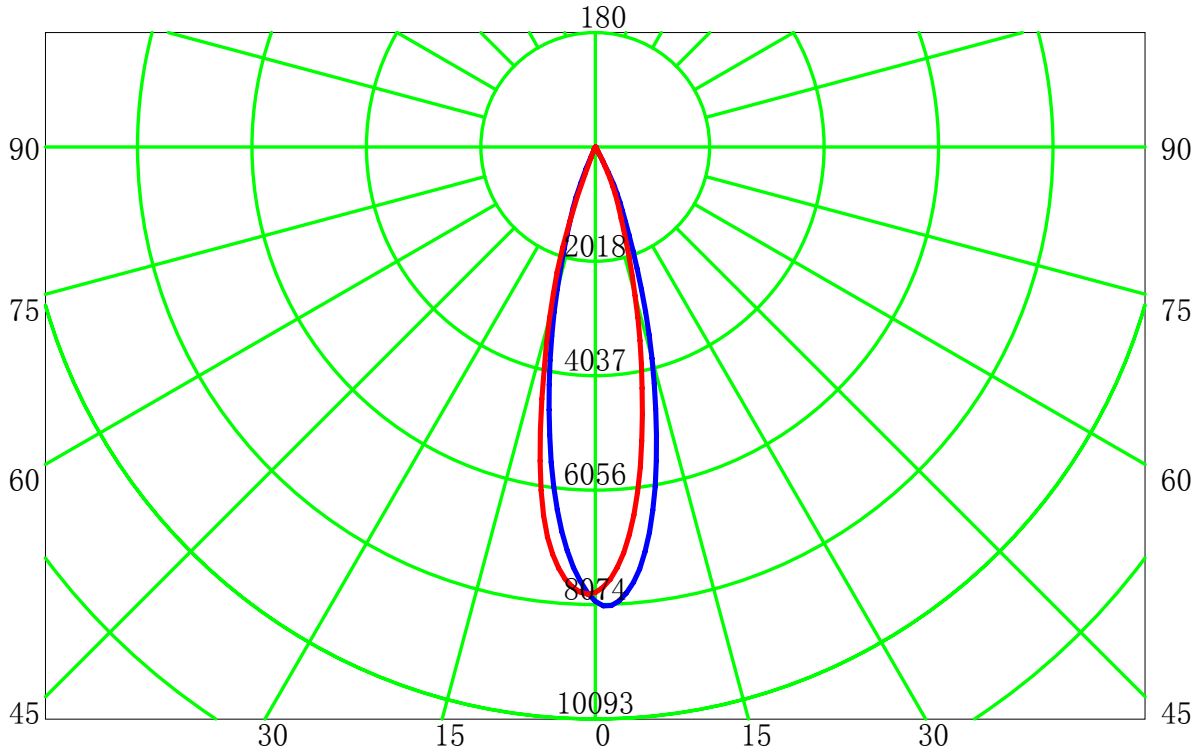

单位: cd

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600


测试距离: 8.257 m

环境湿度:

核 验:



配光曲线(cd/klm)

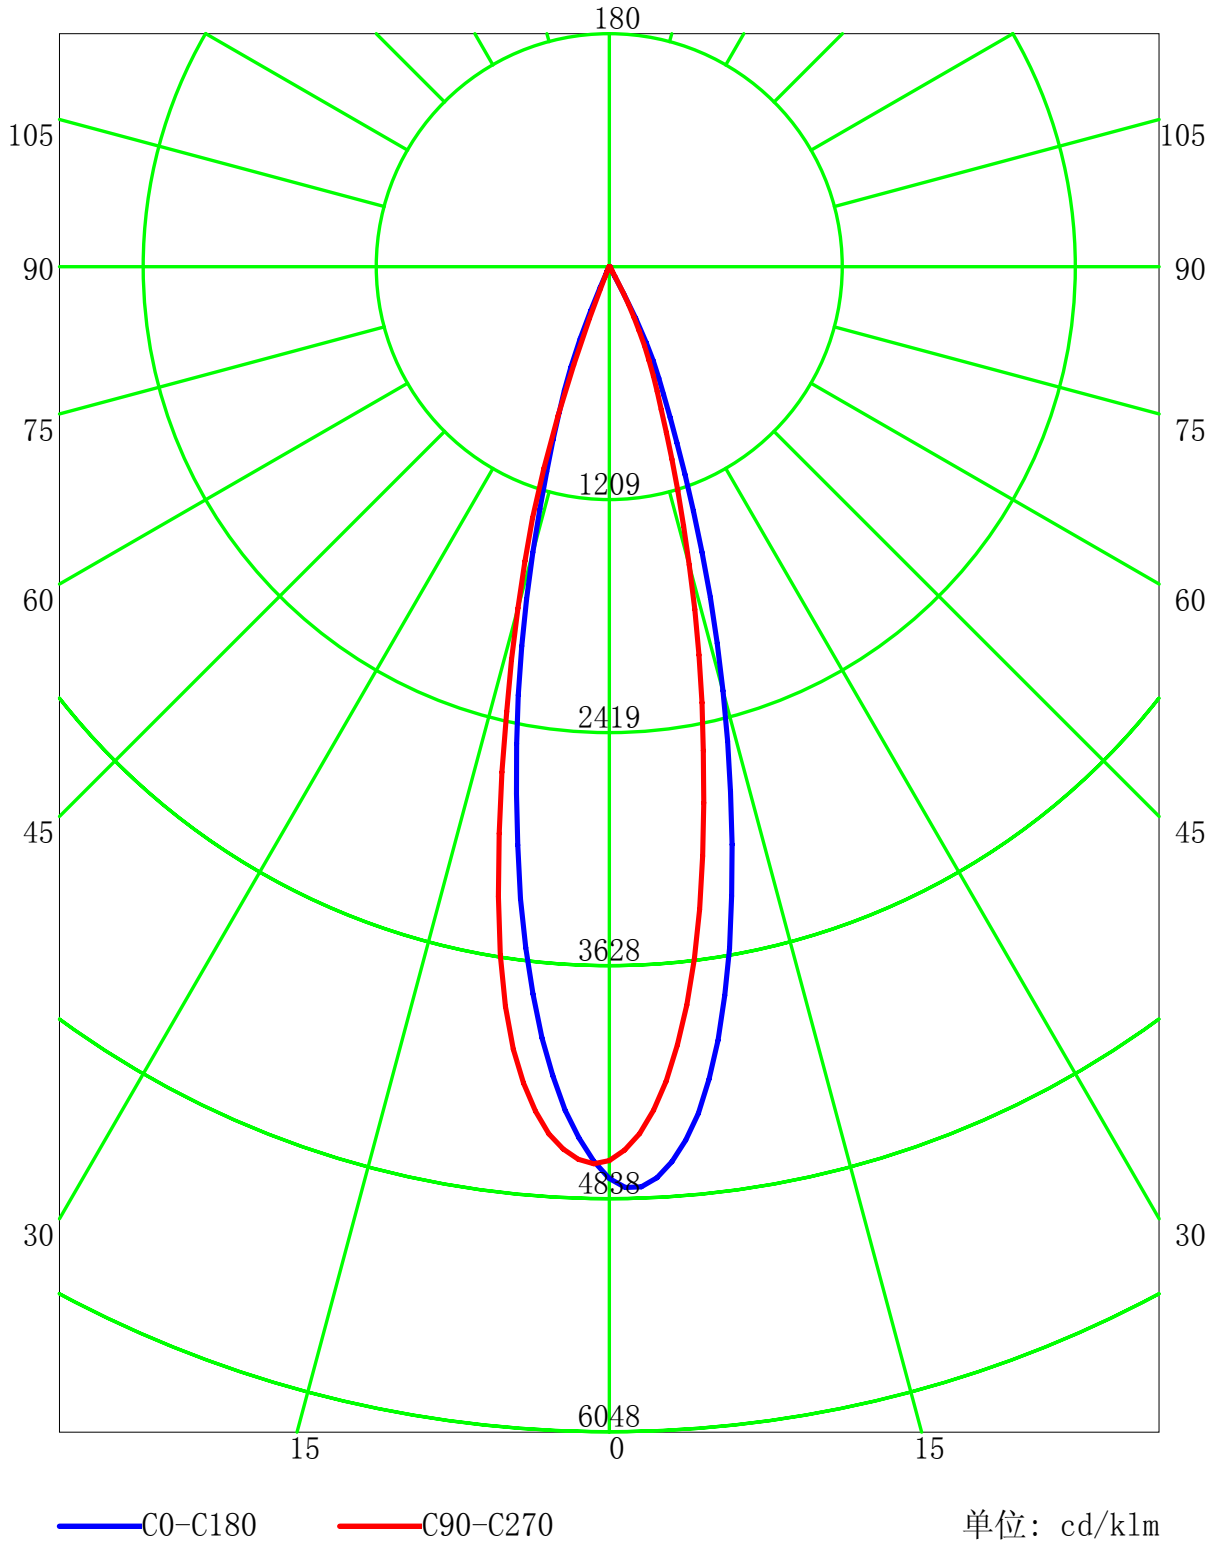

C 平面 (°): 0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0
 测试设备: GPM-1600
 测试距离: 8.257 m
 环境湿度:
 核 验:




室内灯具利用系数表

| | | | | | | | | | | | | | | | | | | |
|-----|----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RC | 0.8 | 0.8 | 0.8 | 0.8 | 0.7 | 0.7 | 0.7 | 0.7 | 0.5 | 0.5 | 0.5 | 0.3 | 0.3 | 0.3 | 0.1 | 0.1 | 0.1 | 0 |
| RW | 0.7 | 0.5 | 0.3 | 0.1 | 0.7 | 0.5 | 0.3 | 0.1 | 0.5 | 0.3 | 0.1 | 0.5 | 0.3 | 0.1 | 0.5 | 0.3 | 0.1 | 0 |
| RCR | RF = 0.2 | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1 | 115 | 113 | 111 | 110 | 113 | 111 | 109 | 108 | 107 | 106 | 105 | 103 | 103 | 102 | 100 | 99 | 99 | 97 |
| 2 | 112 | 108 | 105 | 103 | 110 | 107 | 104 | 102 | 104 | 102 | 100 | 101 | 99 | 98 | 98 | 97 | 96 | 94 |
| 3 | 108 | 104 | 101 | 98 | 107 | 103 | 100 | 97 | 100 | 98 | 96 | 98 | 96 | 94 | 96 | 94 | 93 | 92 |
| 4 | 105 | 100 | 97 | 94 | 104 | 99 | 96 | 93 | 97 | 94 | 92 | 96 | 93 | 91 | 94 | 92 | 90 | 89 |
| 5 | 103 | 97 | 93 | 90 | 101 | 96 | 93 | 90 | 95 | 92 | 89 | 93 | 90 | 88 | 92 | 90 | 88 | 87 |
| 6 | 100 | 94 | 90 | 87 | 99 | 93 | 90 | 87 | 92 | 89 | 86 | 91 | 88 | 86 | 90 | 87 | 85 | 84 |
| 7 | 97 | 91 | 87 | 85 | 96 | 91 | 87 | 84 | 90 | 86 | 84 | 89 | 86 | 84 | 88 | 85 | 83 | 82 |
| 8 | 95 | 89 | 85 | 82 | 94 | 88 | 85 | 82 | 87 | 84 | 82 | 86 | 84 | 81 | 86 | 83 | 81 | 80 |
| 9 | 93 | 86 | 82 | 80 | 92 | 86 | 82 | 80 | 85 | 82 | 80 | 84 | 81 | 79 | 84 | 81 | 79 | 78 |
| 10 | 90 | 84 | 80 | 78 | 90 | 84 | 80 | 78 | 83 | 80 | 78 | 82 | 80 | 77 | 82 | 79 | 77 | 76 |

最大允许安装距离高度比(横向): 0.44
 最大允许安装距离高度比(纵向): 0.43
 最大允许安装距离高度比(对角): 0.43

灯具概算曲线

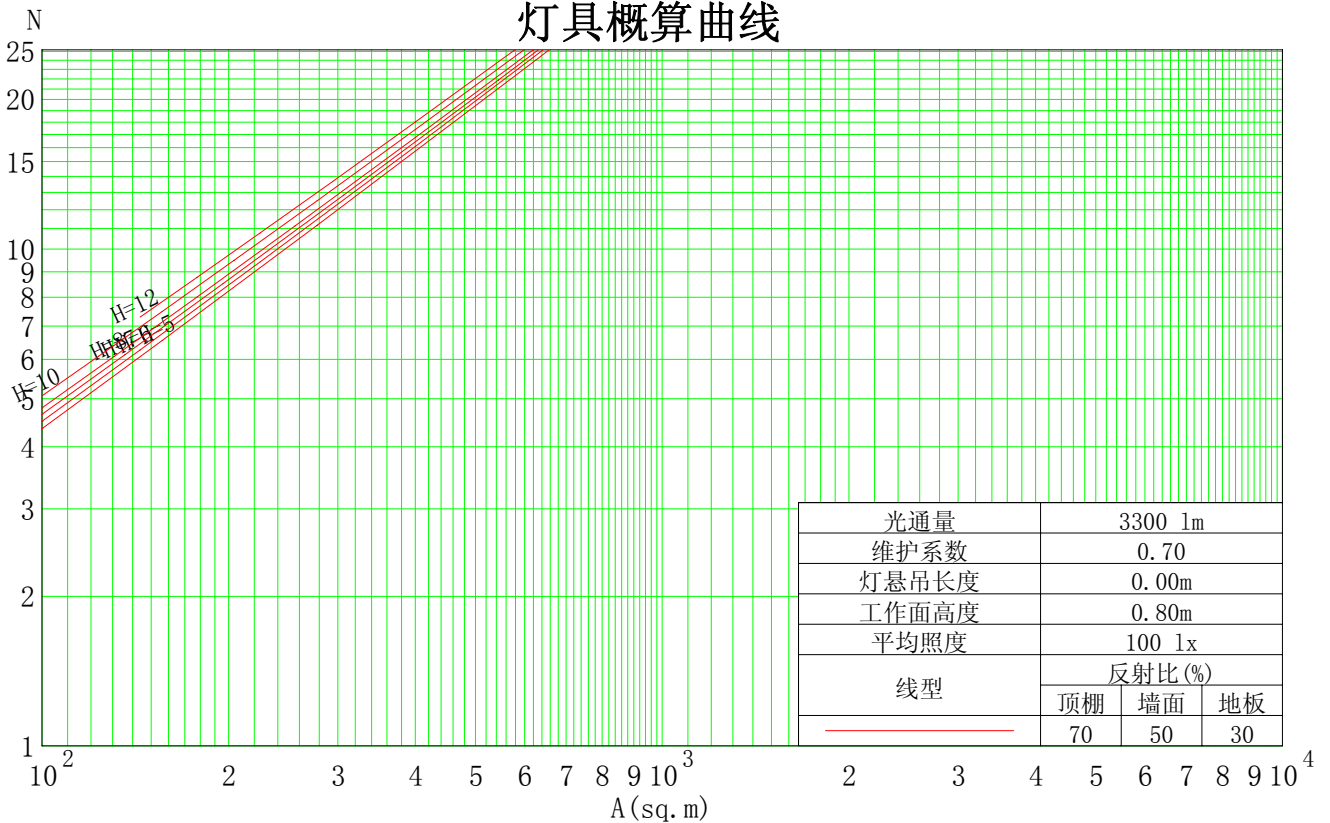


C 平面 (°): 0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0
 测试设备: GPM-1600
 测试距离: 8.257 m
 环境湿度:
 核 验:



水平面等照度曲线

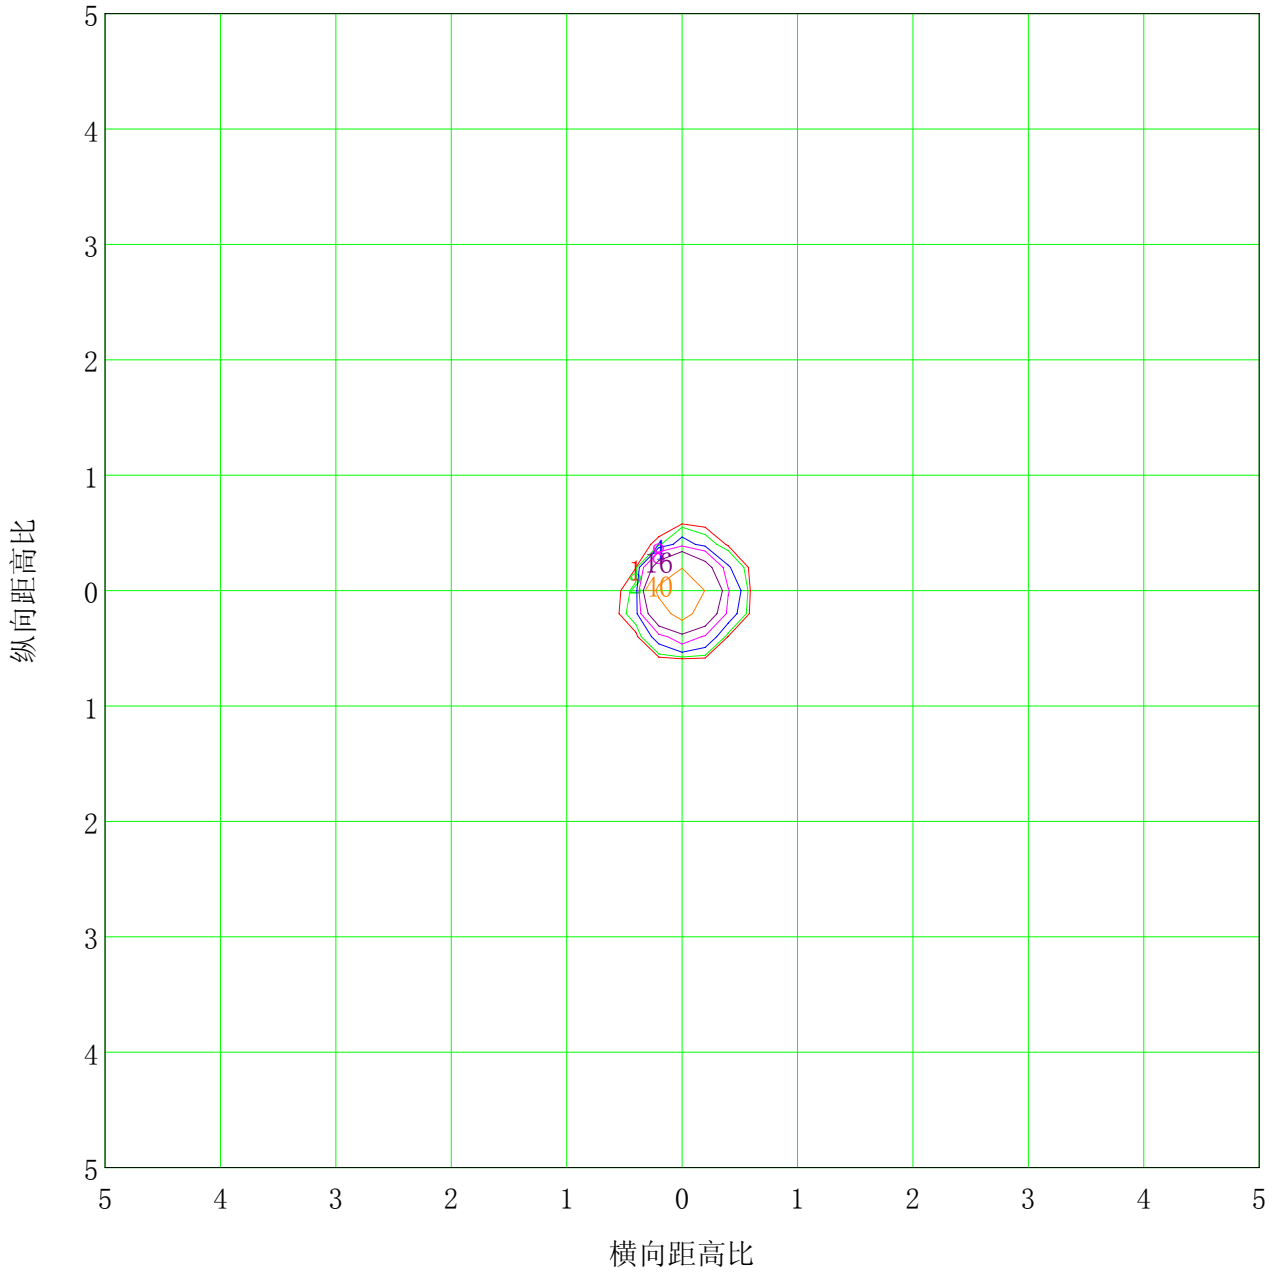

| | | | |
|-----------|-------|--------------------|-------|
| 安装高度: 10m | | 最大照度值(100%): 81 lx | |
| — (1%): | 1 lx | — (2%): | 2 lx |
| — (5%): | 4 lx | — (10%): | 8 lx |
| — (20%): | 16 lx | — (50%): | 40 lx |
| — (100%): | 81 lx | | |

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.257 m



环境湿度:

核 验:



亮度限制曲线

| 眩光评价值 | 质量等级 | 使用照度 / lx | | | | | | | |
|-------|------|-----------|------|------|-------|-------|-------|-------|-------|
| | | a | b | c | d | e | f | g | h |
| 1.15 | A | 2000 | 1000 | 500 | <=300 | | | | |
| 1.50 | B | | 2000 | 1000 | 500 | <=300 | | | |
| 1.85 | C | | | 2000 | 1000 | 500 | <=300 | | |
| 2.20 | D | | | | 2000 | 1000 | 500 | <=300 | |
| 2.55 | E | | | | | 2000 | 1000 | 500 | <=300 |

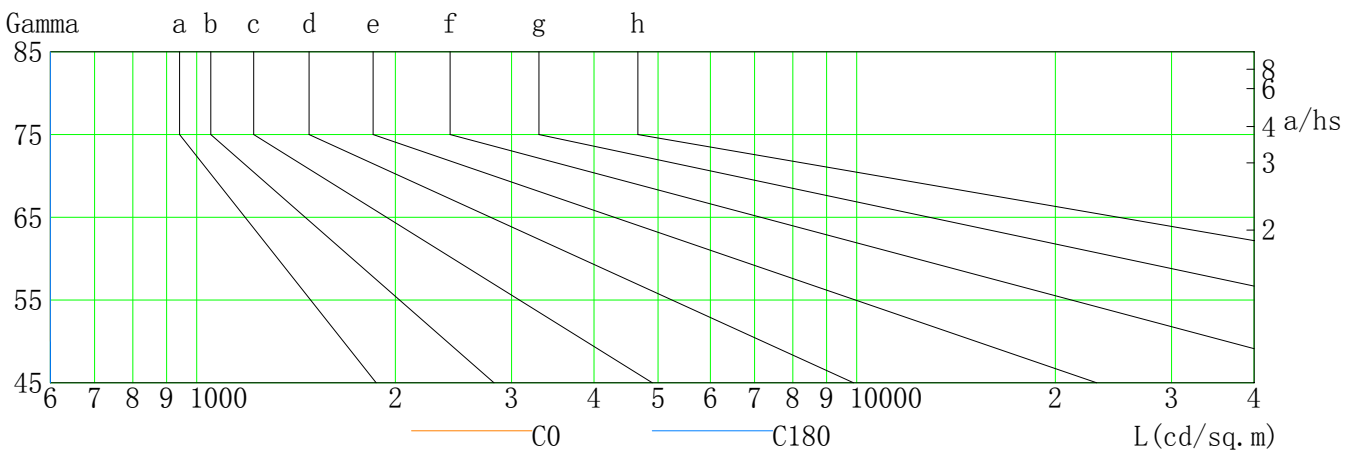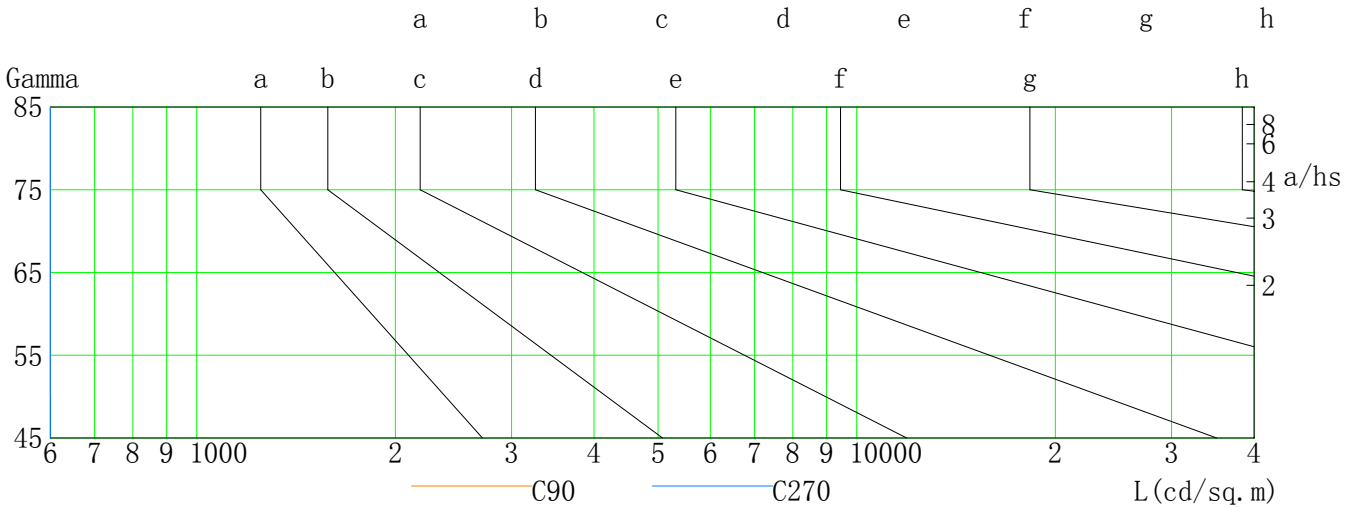

| L (cd/sq. m) | G45 | G50 | G55 | G60 | G65 | G70 | G75 | G80 | G85 |
|--------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| C0 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| C90 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| C180 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| C270 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

C 平面 (°): 0.0-360.0: 90.0


测试单位:
测试类型: TYPE C
环境温度:
测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600
测试距离: 8.257 m
环境湿度:
核 验:



照度距离关系图

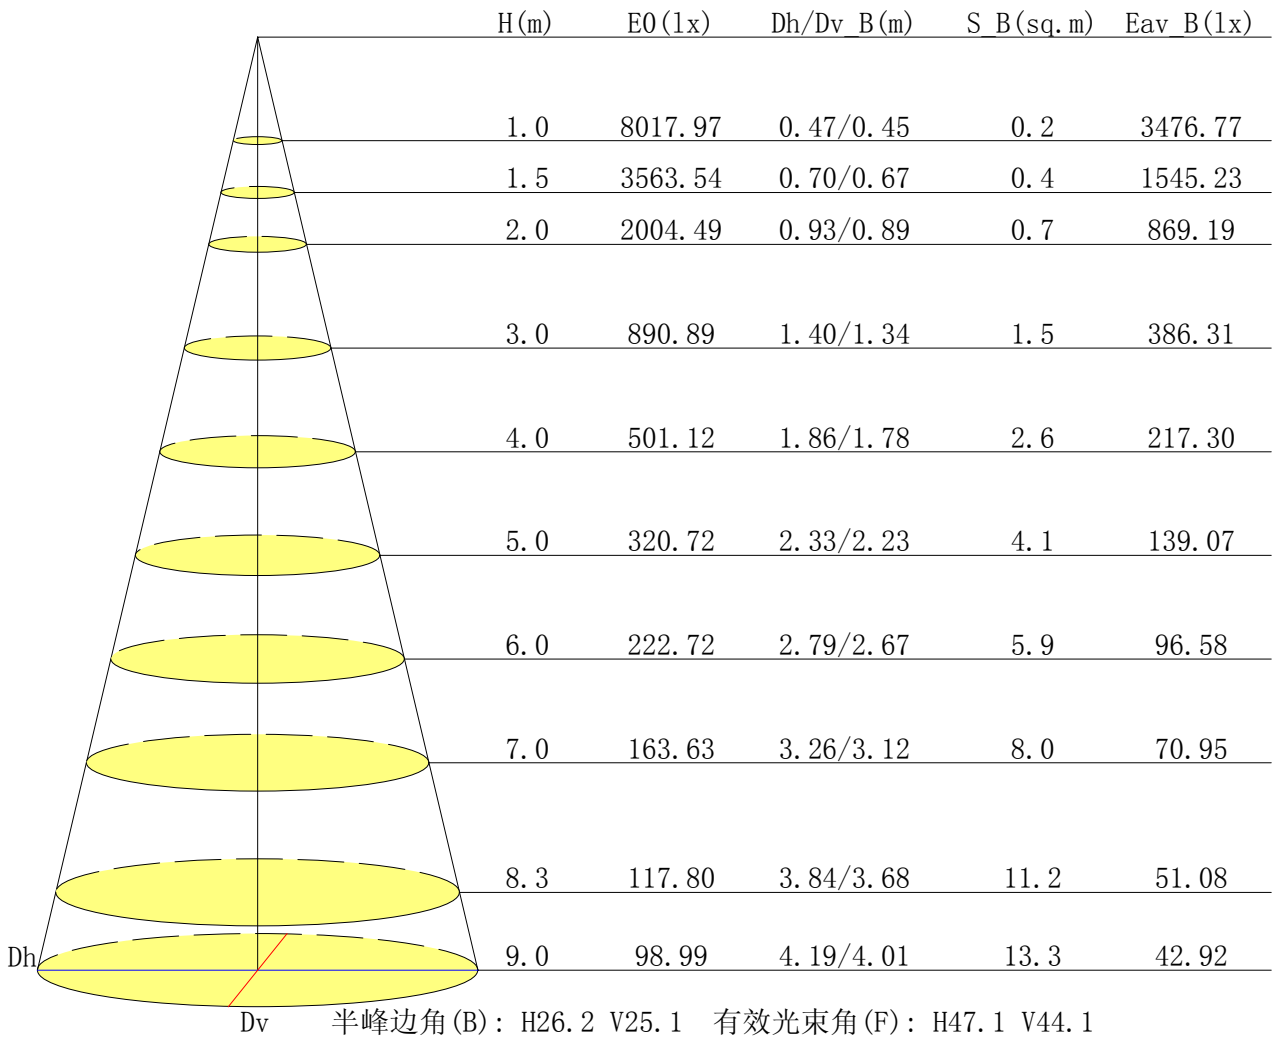


C 平面 (°): 0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0
 测试设备: GPM-1600
 测试距离: 8.257 m
 环境湿度:
 核 验:



垂直面等照度曲线

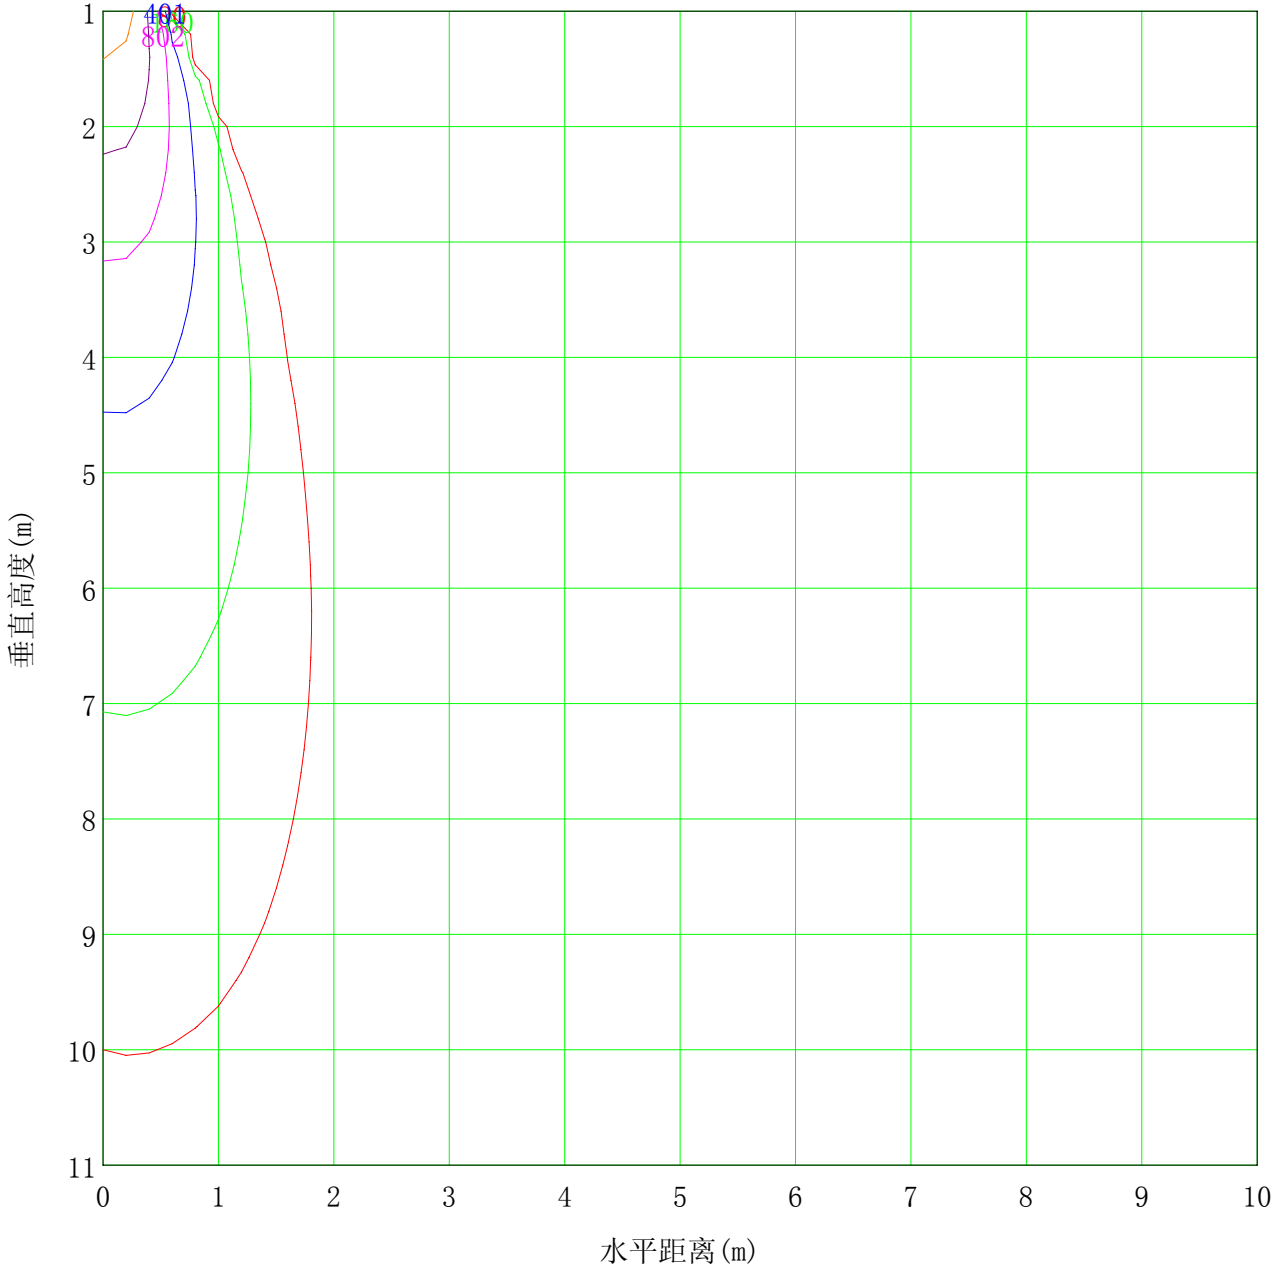

| | | |
|-------------------|------------------|-------------|
| 最低高度(米): 1m | 最大高度(米): 11 | 最大照度值: 8018 |
| — (1%): 80 lx | — (2%): 160 lx | |
| — (5%): 401 lx | — (10%): 802 lx | |
| — (20%): 1604 lx | — (50%): 4009 lx | |
| — (100%): 8018 lx | | |

C 平面 (°): 0.0-360.0: 90.0


测试单位:
测试类型: TYPE C
环境温度:
测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600
测试距离: 8.257 m
环境湿度:
核 验:



灯具有效平均照度图

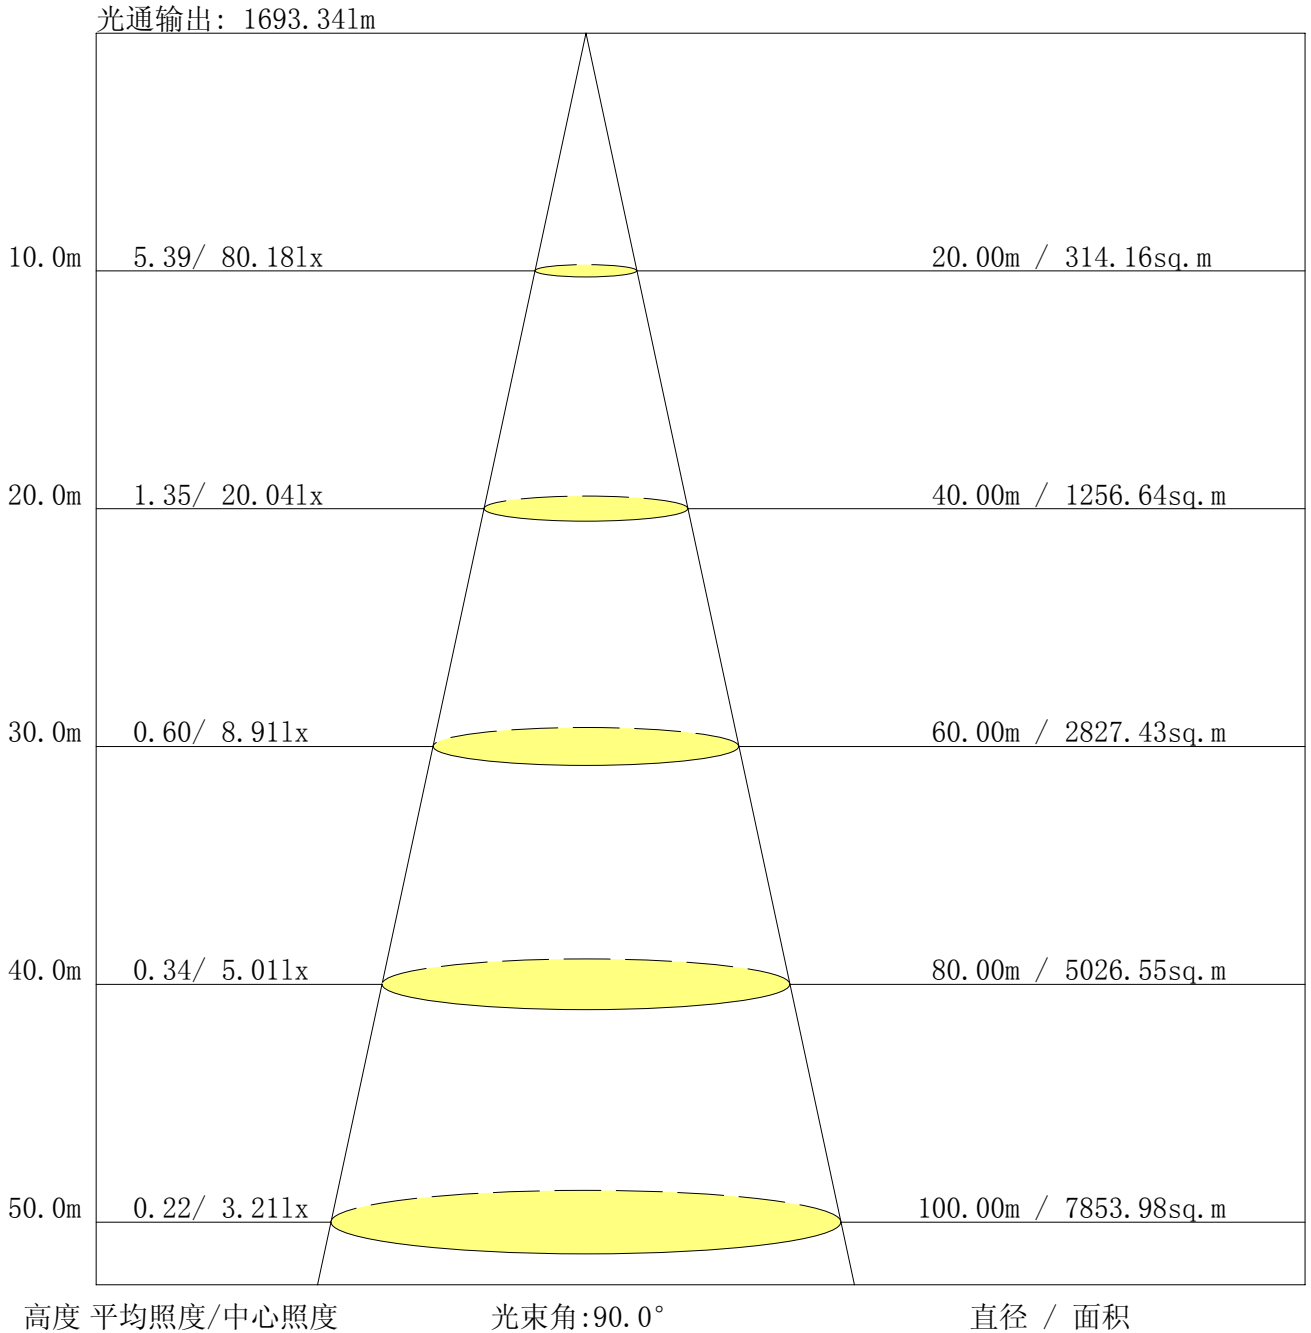

C 平面 (°): 0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0
 测试设备: GPM-1600
 测试距离: 8.257 m
 环境湿度:
 核 验:



光强分布数据表格

单位: cd

| G\C | C0.0 | C90.0 | C180.0 | C270.0 | C360.0 | | | | | |
|-------|--------|--------|--------|--------|--------|--|--|--|--|--|
| G0.0 | 8018.0 | 7860.8 | 8018.0 | 7860.8 | 8018.0 | | | | | |
| G1.0 | 8098.3 | 7769.9 | 7868.0 | 7890.0 | 8098.3 | | | | | |
| G2.0 | 8096.5 | 7629.1 | 7665.5 | 7854.4 | 8096.5 | | | | | |
| G3.0 | 8022.3 | 7429.2 | 7429.2 | 7770.7 | 8022.3 | | | | | |
| G4.0 | 7889.5 | 7180.9 | 7132.5 | 7644.8 | 7889.5 | | | | | |
| G5.0 | 7711.8 | 6870.9 | 6807.5 | 7455.8 | 7711.8 | | | | | |
| G6.0 | 7488.4 | 6528.2 | 6430.6 | 7219.8 | 7488.4 | | | | | |
| G7.0 | 7197.6 | 6134.7 | 6035.4 | 6932.6 | 7197.6 | | | | | |
| G8.0 | 6870.9 | 5708.3 | 5614.9 | 6569.9 | 6870.9 | | | | | |
| G9.0 | 6488.0 | 5246.8 | 5150.3 | 6130.4 | 6488.0 | | | | | |
| G10.0 | 6087.4 | 4788.6 | 4707.7 | 5623.3 | 6087.4 | | | | | |
| G11.0 | 5638.1 | 4335.0 | 4275.3 | 5077.6 | 5638.1 | | | | | |
| G12.0 | 5194.3 | 3920.5 | 3852.2 | 4544.4 | 5194.3 | | | | | |
| G13.0 | 4738.6 | 3504.6 | 3423.9 | 4016.0 | 4738.6 | | | | | |
| G14.0 | 4301.2 | 3106.8 | 3012.9 | 3559.9 | 4301.2 | | | | | |
| G15.0 | 3861.9 | 2714.4 | 2602.0 | 3110.1 | 3861.9 | | | | | |
| G16.0 | 3446.2 | 2374.2 | 2216.8 | 2692.6 | 3446.2 | | | | | |
| G17.0 | 3040.0 | 2060.9 | 1884.8 | 2312.8 | 3040.0 | | | | | |
| G18.0 | 2640.1 | 1781.1 | 1603.2 | 1866.1 | 2640.1 | | | | | |
| G19.0 | 2270.0 | 1541.8 | 1355.9 | 1385.6 | 2270.0 | | | | | |
| G20.0 | 1946.7 | 1337.2 | 1159.1 | 916.7 | 1946.7 | | | | | |
| G21.0 | 1658.5 | 1174.7 | 946.1 | 487.1 | 1658.5 | | | | | |
| G22.0 | 1430.7 | 1034.9 | 684.5 | 209.4 | 1430.7 | | | | | |
| G23.0 | 1222.0 | 896.4 | 419.5 | 102.4 | 1222.0 | | | | | |
| G24.0 | 1072.3 | 762.6 | 199.4 | 67.3 | 1072.3 | | | | | |
| G25.0 | 912.6 | 622.3 | 78.1 | 51.5 | 912.6 | | | | | |
| G26.0 | 740.8 | 495.1 | 55.8 | 42.2 | 740.8 | | | | | |
| G27.0 | 511.7 | 372.5 | 48.1 | 34.8 | 511.7 | | | | | |
| G28.0 | 286.4 | 264.9 | 42.0 | 29.4 | 286.4 | | | | | |
| G29.0 | 105.5 | 174.1 | 36.1 | 24.6 | 105.5 | | | | | |
| G30.0 | 56.1 | 107.5 | 31.0 | 20.5 | 56.1 | | | | | |
| G31.0 | 45.0 | 69.4 | 25.9 | 16.4 | 45.0 | | | | | |
| G32.0 | 39.4 | 57.3 | 21.8 | 12.8 | 39.4 | | | | | |
| G33.0 | 34.8 | 47.6 | 17.9 | 10.0 | 34.8 | | | | | |
| G34.0 | 30.2 | 39.4 | 14.3 | 7.9 | 30.2 | | | | | |
| G35.0 | 25.9 | 34.6 | 11.8 | 5.6 | 25.9 | | | | | |
| G36.0 | 22.0 | 31.0 | 8.7 | 4.1 | 22.0 | | | | | |

C 平面 (°):0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°):0.0-180.0:1.0

测试设备: GPM-1600

测试距离: 8.257 m

环境湿度:

核 验:



光强分布数据表格 (续 1)

单位: cd

| G\C | C0.0 | C90.0 | C180.0 | C270.0 | C360.0 | | | | | |
|-------|------|-------|--------|--------|--------|--|--|--|--|--|
| G37.0 | 18.4 | 27.4 | 6.9 | 2.8 | 18.4 | | | | | |
| G38.0 | 15.6 | 22.8 | 4.9 | 1.5 | 15.6 | | | | | |
| G39.0 | 12.5 | 19.7 | 3.3 | 0.5 | 12.5 | | | | | |
| G40.0 | 10.5 | 17.1 | 1.8 | 0.0 | 10.5 | | | | | |
| G41.0 | 8.2 | 14.1 | 0.5 | 0.0 | 8.2 | | | | | |
| G42.0 | 6.4 | 11.8 | 0.0 | 0.0 | 6.4 | | | | | |
| G43.0 | 4.9 | 9.7 | 0.0 | 0.0 | 4.9 | | | | | |
| G44.0 | 3.3 | 7.4 | 0.0 | 0.0 | 3.3 | | | | | |
| G45.0 | 2.3 | 5.4 | 0.0 | 0.0 | 2.3 | | | | | |
| G46.0 | 1.3 | 4.1 | 0.0 | 0.0 | 1.3 | | | | | |
| G47.0 | 0.0 | 2.6 | 0.0 | 0.0 | 0.0 | | | | | |
| G48.0 | 0.0 | 1.5 | 0.0 | 0.0 | 0.0 | | | | | |
| G49.0 | 0.0 | 0.5 | 0.0 | 0.0 | 0.0 | | | | | |
| G50.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G51.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G52.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G53.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G54.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G55.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G56.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G57.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G58.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G59.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G60.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G61.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G62.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G63.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G64.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G65.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G66.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G67.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G68.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G69.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G70.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G71.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G72.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G73.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |

C 平面 (°):0.0-360.0: 90.0

测试单位:
测试类型: TYPE C
环境温度:
测试员:

Gamma 平面 (°):0.0-180.0:1.0

测试设备: GPM-1600
测试距离: 8.257 m
环境湿度:
核 验:



光强分布数据表格 (续 2)

单位: cd

| G\C | C0.0 | C90.0 | C180.0 | C270.0 | C360.0 | | | | | |
|--------|------|-------|--------|--------|--------|--|--|--|--|--|
| G74.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G75.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G76.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G77.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G78.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G79.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G80.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G81.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G82.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G83.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G84.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G85.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G86.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G87.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G88.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G89.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G90.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G91.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G92.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G93.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G94.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G95.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G96.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G97.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G98.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G99.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G100.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G101.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G102.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G103.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G104.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G105.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G106.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G107.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G108.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G109.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G110.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |

C 平面 (°):0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°):0.0-180.0:1.0
 测试设备: GPM-1600
 测试距离: 8.257 m
 环境湿度:
 核 验:



光强分布数据表格 (续 3)

单位: cd

| G\C | C0.0 | C90.0 | C180.0 | C270.0 | C360.0 | | | | | |
|--------|------|-------|--------|--------|--------|--|--|--|--|--|
| G111.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G112.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G113.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G114.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G115.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G116.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G117.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G118.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G119.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G120.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G121.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G122.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G123.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G124.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G125.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G126.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G127.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G128.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G129.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G130.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G131.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G132.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G133.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G134.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G135.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G136.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G137.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G138.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G139.0 | 0.0 | 0.0 | 0.0 | 0.3 | 0.0 | | | | | |
| G140.0 | 0.0 | 0.0 | 0.0 | 0.3 | 0.0 | | | | | |
| G141.0 | 0.0 | 0.0 | 0.0 | 1.3 | 0.0 | | | | | |
| G142.0 | 0.0 | 0.0 | 0.0 | 1.5 | 0.0 | | | | | |
| G143.0 | 0.0 | 0.0 | 0.0 | 1.5 | 0.0 | | | | | |
| G144.0 | 0.0 | 0.0 | 0.0 | 1.8 | 0.0 | | | | | |
| G145.0 | 0.0 | 0.0 | 0.0 | 1.8 | 0.0 | | | | | |
| G146.0 | 0.0 | 0.0 | 0.0 | 2.3 | 0.0 | | | | | |
| G147.0 | 0.0 | 0.0 | 0.0 | 1.8 | 0.0 | | | | | |

C 平面 (°):0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°):0.0-180.0:1.0
 测试设备: GPM-1600
 测试距离: 8.257 m
 环境湿度:
 核 验:



光强分布数据表格 (续 4)

单位: cd

| G\C | C0.0 | C90.0 | C180.0 | C270.0 | C360.0 | | | | | |
|--------|------|-------|--------|--------|--------|--|--|--|--|--|
| G148.0 | 0.0 | 0.0 | 0.0 | 1.8 | 0.0 | | | | | |
| G149.0 | 0.0 | 0.0 | 0.0 | 2.8 | 0.0 | | | | | |
| G150.0 | 0.0 | 0.0 | 0.0 | 3.1 | 0.0 | | | | | |
| G151.0 | 0.0 | 0.0 | 0.0 | 3.1 | 0.0 | | | | | |
| G152.0 | 0.0 | 0.0 | 0.0 | 2.8 | 0.0 | | | | | |
| G153.0 | 0.0 | 0.0 | 0.0 | 1.3 | 0.0 | | | | | |
| G154.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G155.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G156.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G157.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G158.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G159.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G160.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G161.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G162.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G163.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G164.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G165.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G166.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G167.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G168.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G169.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G170.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G171.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G172.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G173.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G174.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G175.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G176.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G177.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G178.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G179.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| G180.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

C 平面 (°):0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°):0.0-180.0:1.0
 测试设备: GPM-1600
 测试距离: 8.257 m
 环境湿度:
 核 验: