

报告编号:

测试时间: 2019-06-03 10:29

产品特征

灯具制造厂商:

灯具型号: XQ613040.02W-D24

电压: 221.6 V

功率: 40.20 W

光源个数: 1

电流: 0.190 A

功率因数: 0.955

光度结果

灯具CIE分类: 直接型

灯具光通量: 2242.5 lm

下射光通量比: 100%

水平扩散角 (25%, 50%, 75%, 100%): H38.5, H27.3, H17.5, H0

垂直扩散角 (25%, 50%, 75%, 100%): V38.2, V26.9, V17.3, V0

灯具光效等级 (LER): 56

峰值光强: 9445.8 cd

额定光通量: 2242.5 lm

灯具效率: 100%

上射光通量比: 0%


中心光强: 9445.79 cd

峰值光强位置: H0 V0

灯具实物照片



配光曲线

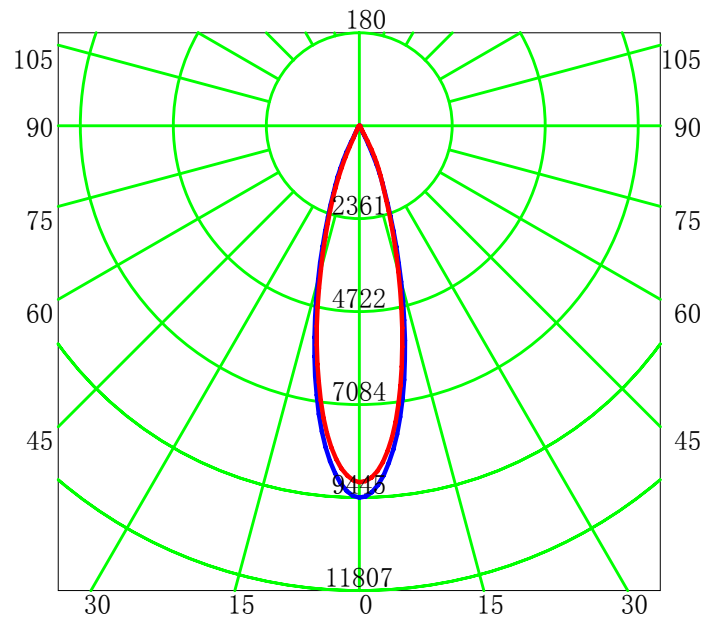

平均光束角 (50%): 27.1° 单位: cd

— C0-C180 — C90-C270

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600



测试距离: 8.650 m

环境湿度:

核 验:



配光曲线

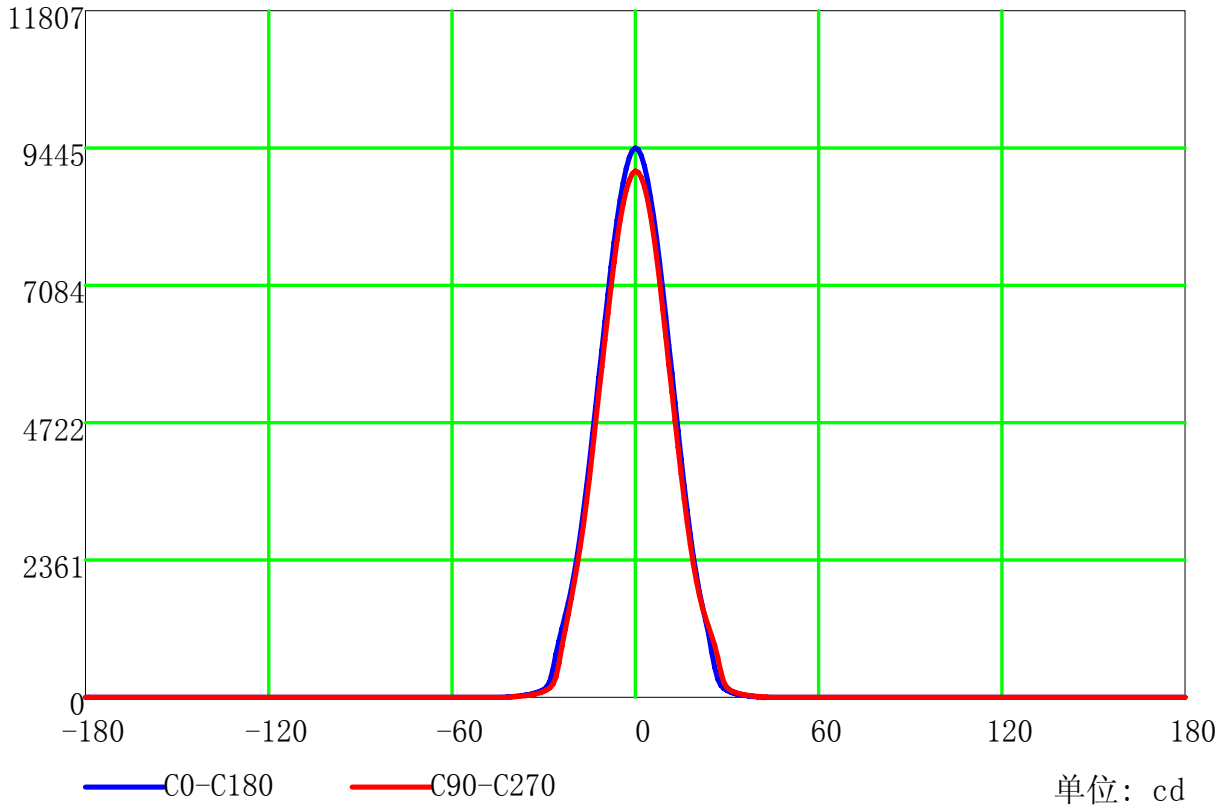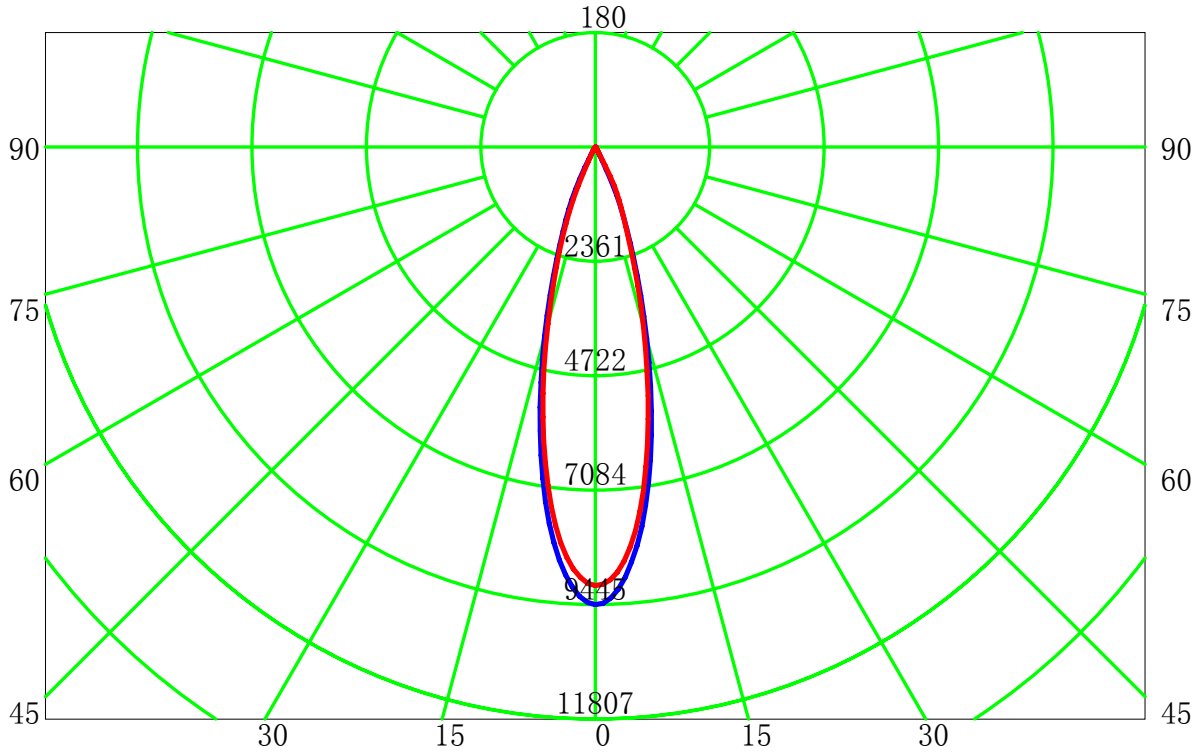


C 平面 (°): 0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验:



配光曲线(cd/klm)

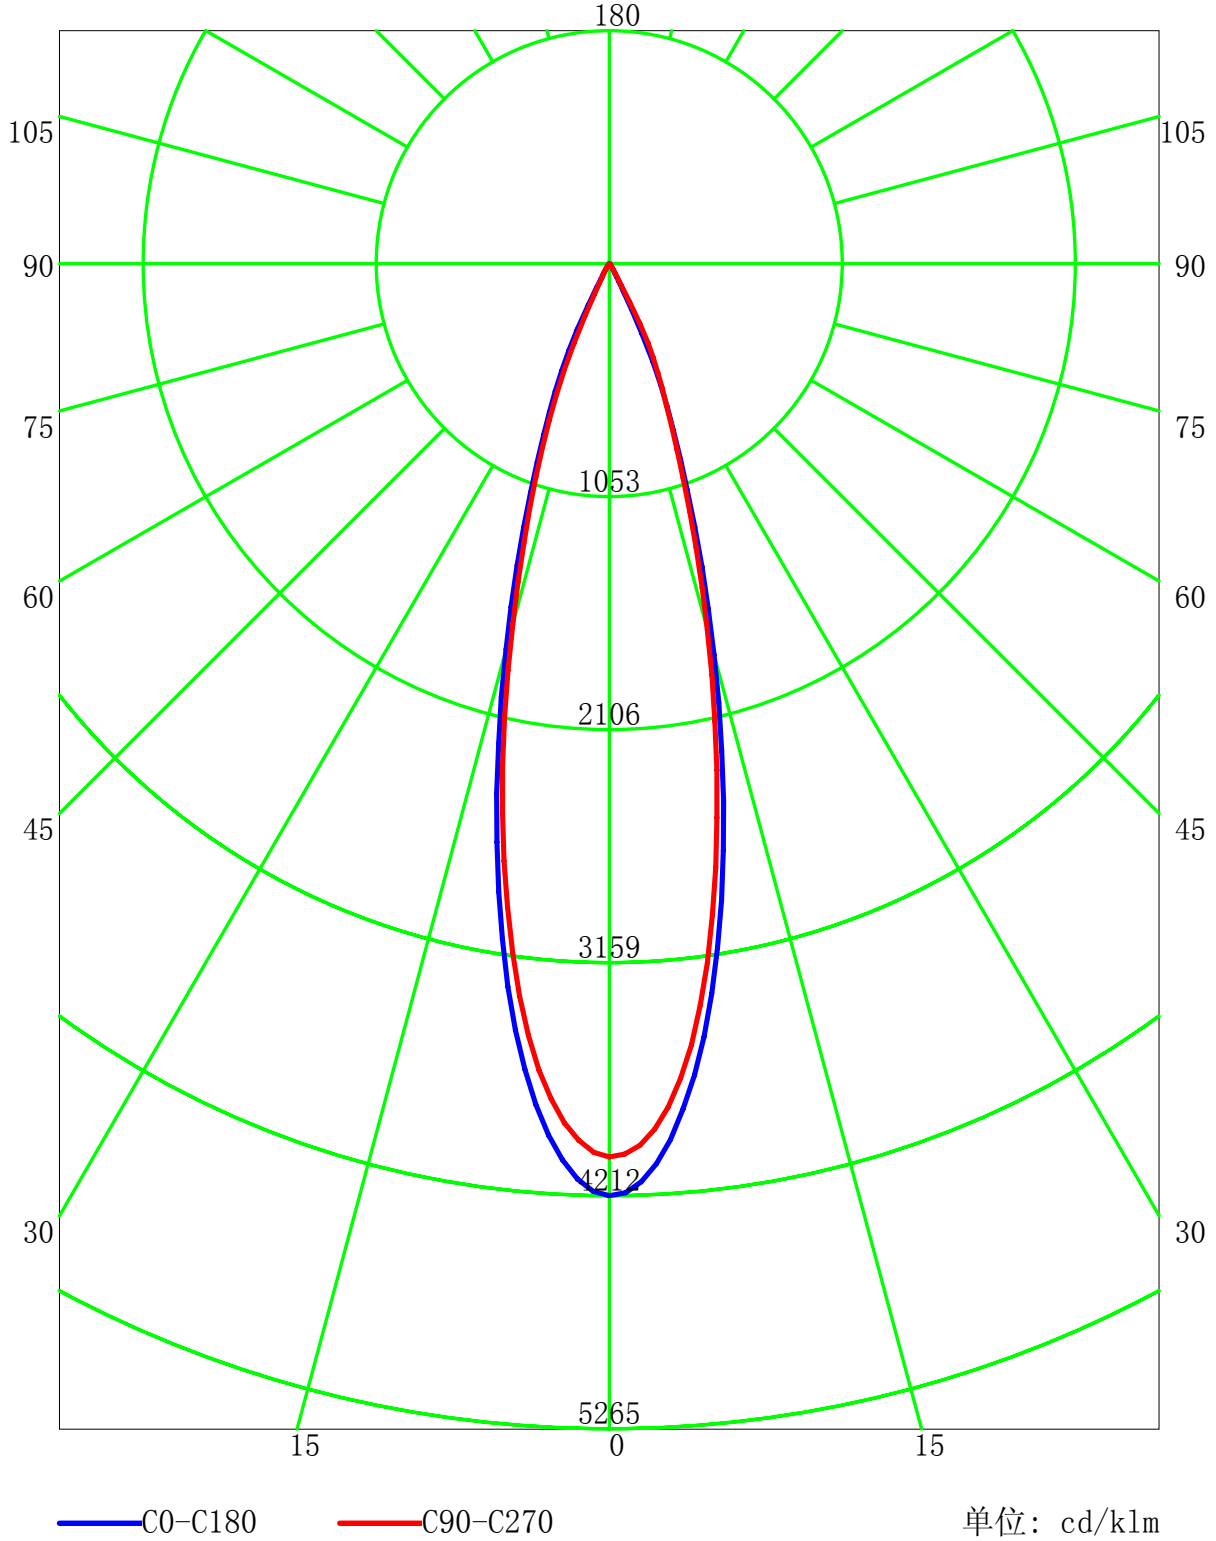

C 平面 (°): 0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验:




室内灯具利用系数表

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91
4	105	99	95	92	103	98	95	92	96	93	91	94	92	90	93	91	89	88
5	102	96	92	89	100	95	91	88	93	90	88	92	89	87	90	88	86	85
6	99	92	88	85	97	92	88	85	90	87	85	89	86	84	88	86	84	83
7	96	90	85	83	95	89	85	82	88	84	82	87	84	82	86	83	81	80
8	93	87	83	80	92	86	82	80	85	82	79	85	81	79	84	81	79	78
9	91	84	80	77	90	84	80	77	83	80	77	82	79	77	82	79	77	76
10	88	82	78	75	88	81	78	75	81	77	75	80	77	75	80	77	75	74

最大允许安装距离高度比(横向): 0.46
 最大允许安装距离高度比(纵向): 0.45
 最大允许安装距离高度比(对角): 0.46

灯具概算曲线

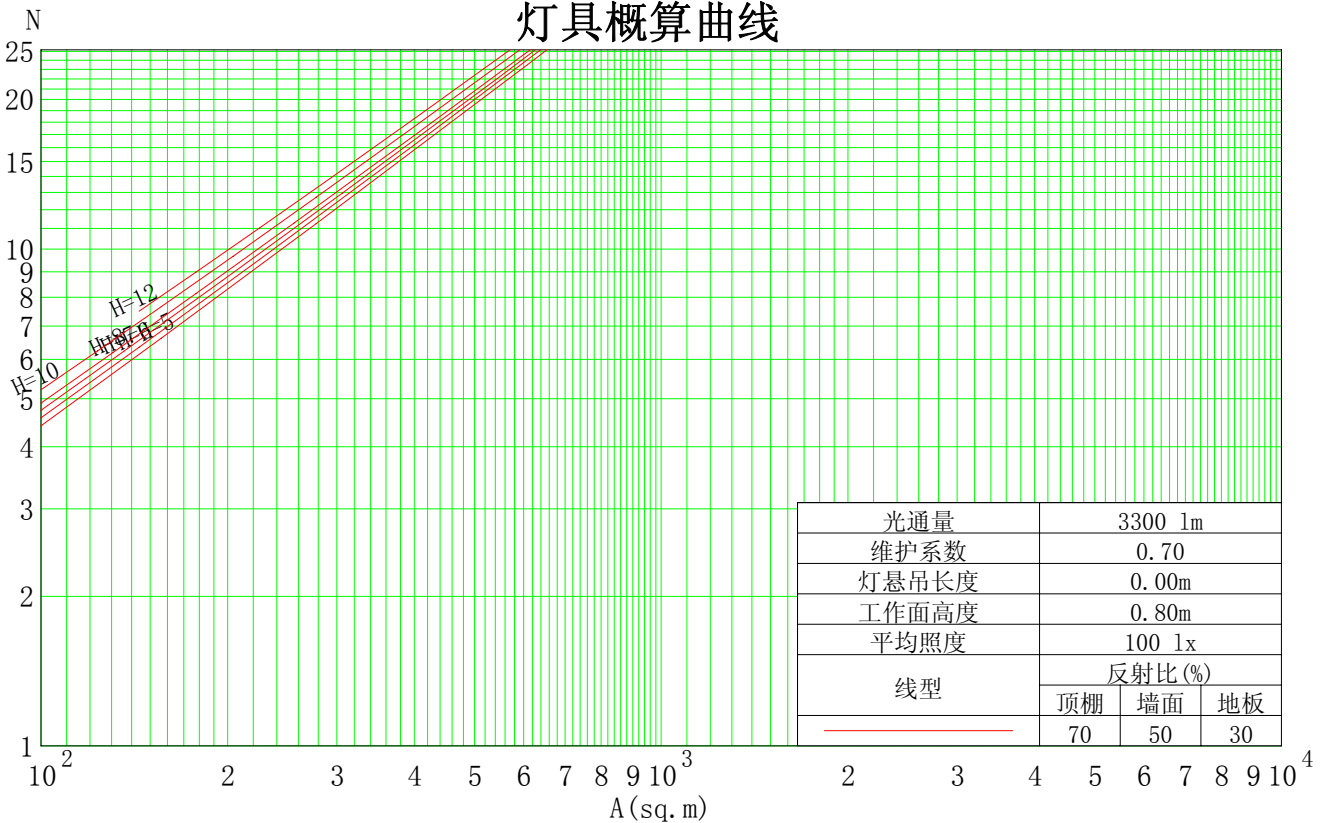


C 平面 (°): 0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验:



水平面等照度曲线

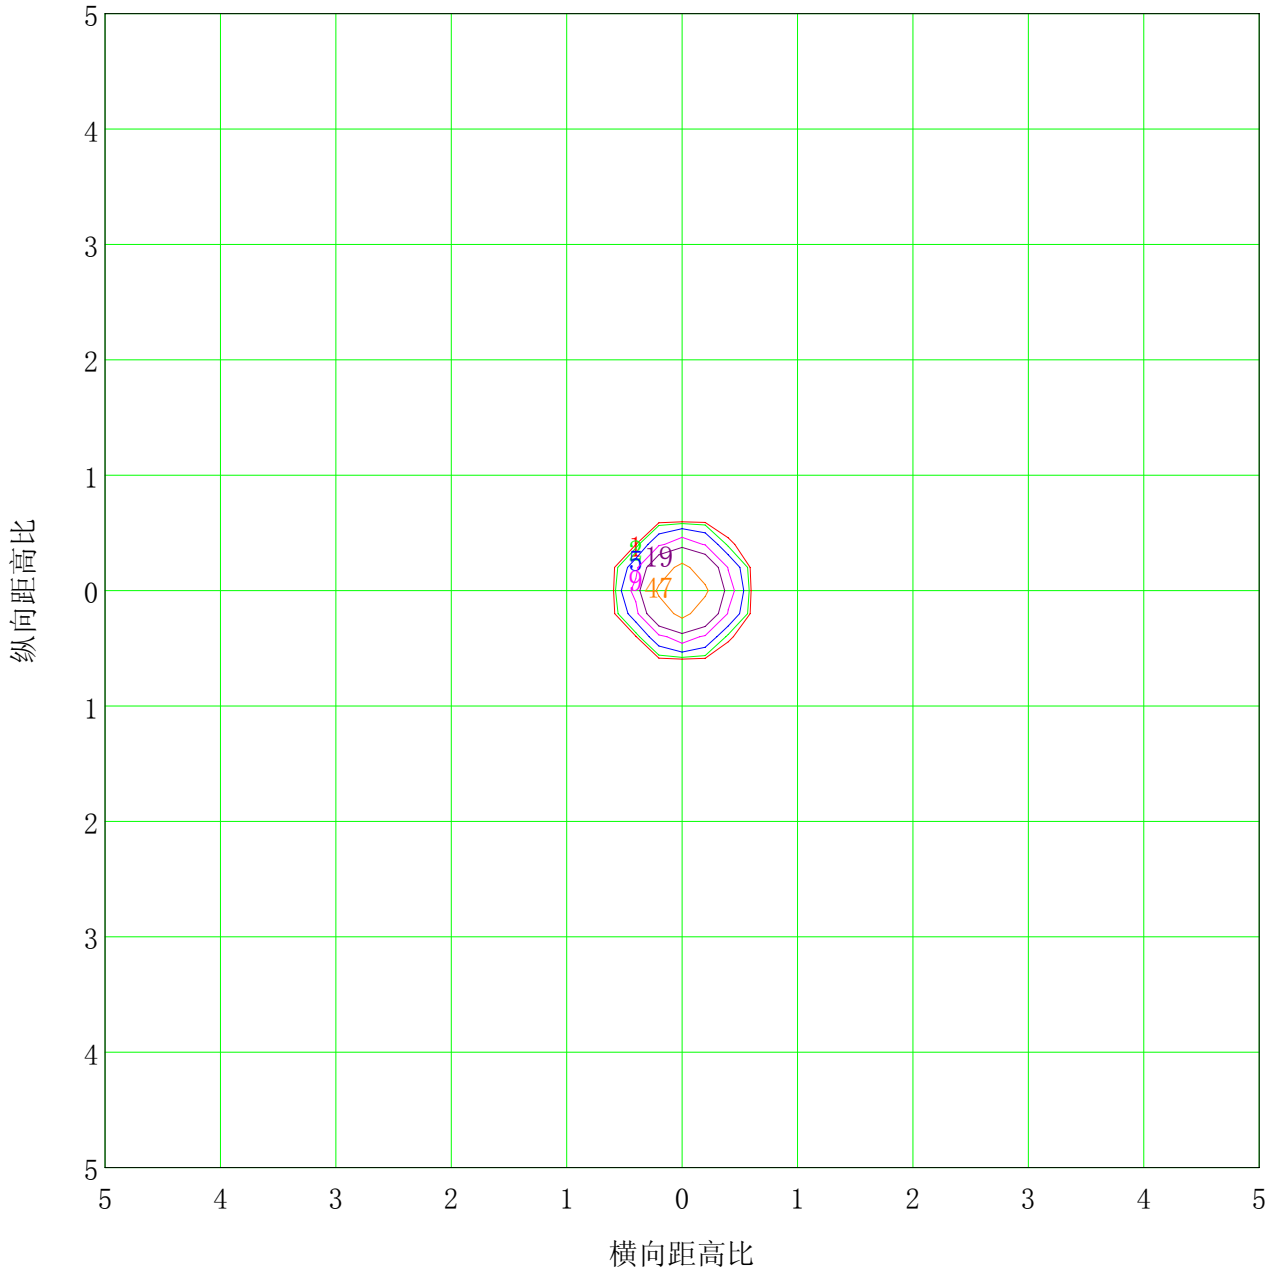

安装高度: 10m		最大照度值(100%): 94 lx	
— (1%):	1 lx	— (2%):	2 lx
— (5%):	5 lx	— (10%):	9 lx
— (20%):	19 lx	— (50%):	47 lx
— (100%):	94 lx		



C 平面 (°):0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°):0.0-180.0:1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验:



亮度限制曲线

眩光评价值	质量等级	使用照度 / lx							
		a	b	c	d	e	f	g	h
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

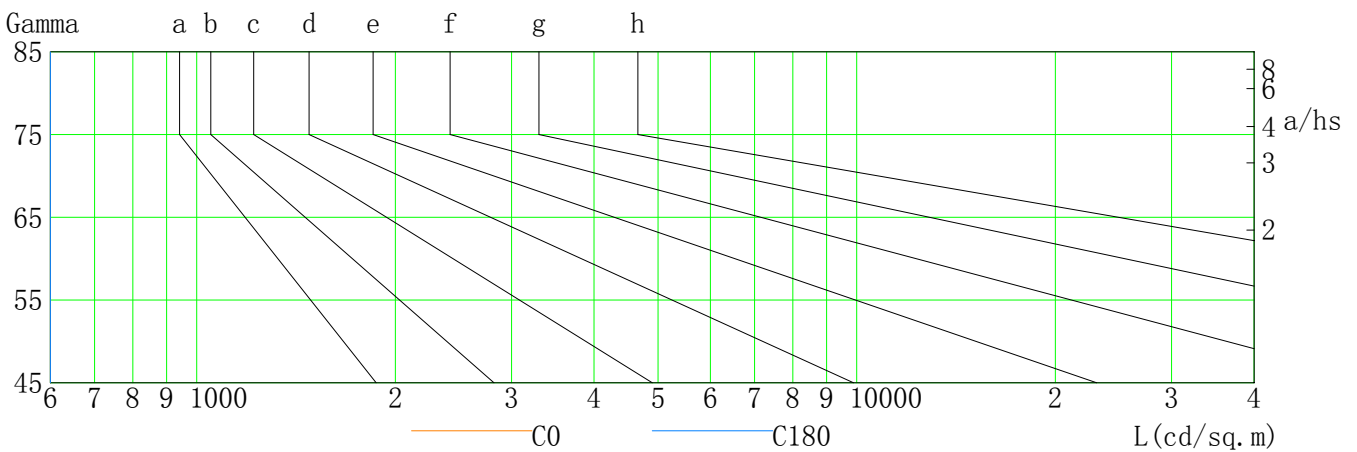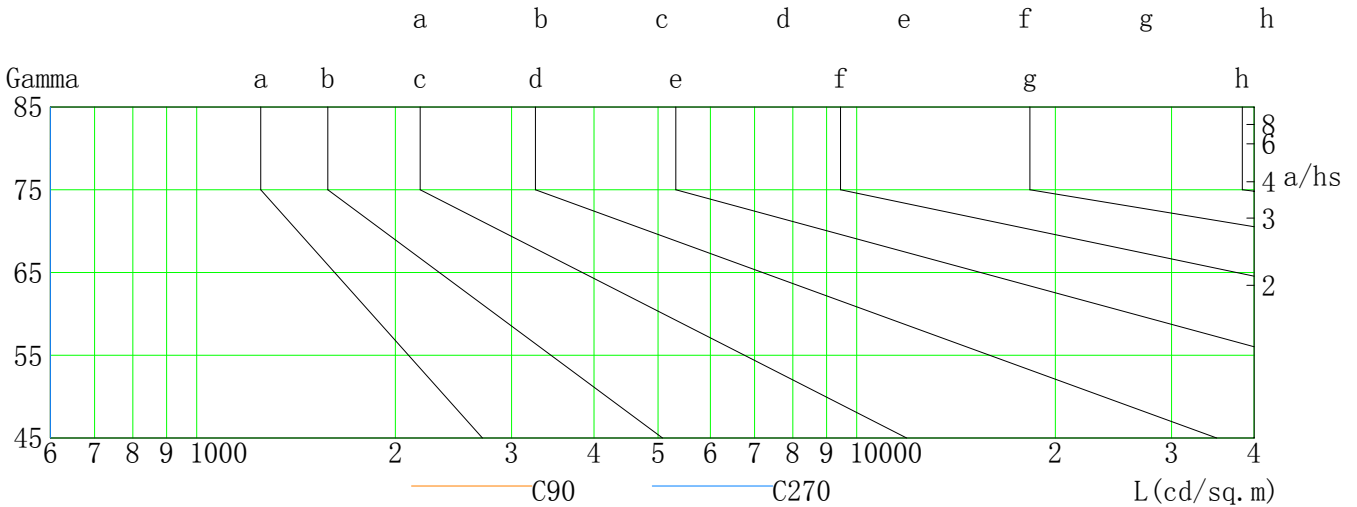

L (cd/sq. m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	0	0	0	0	0	0	0	0	0
C90	0	0	0	0	0	0	0	0	0
C180	0	0	0	0	0	0	0	0	0
C270	0	0	0	0	0	0	0	0	0

C 平面 (°): 0.0-360.0: 90.0


测试单位:
测试类型: TYPE C
环境温度:
测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600
测试距离: 8.650 m
环境湿度:
核 验:



照度距离关系图

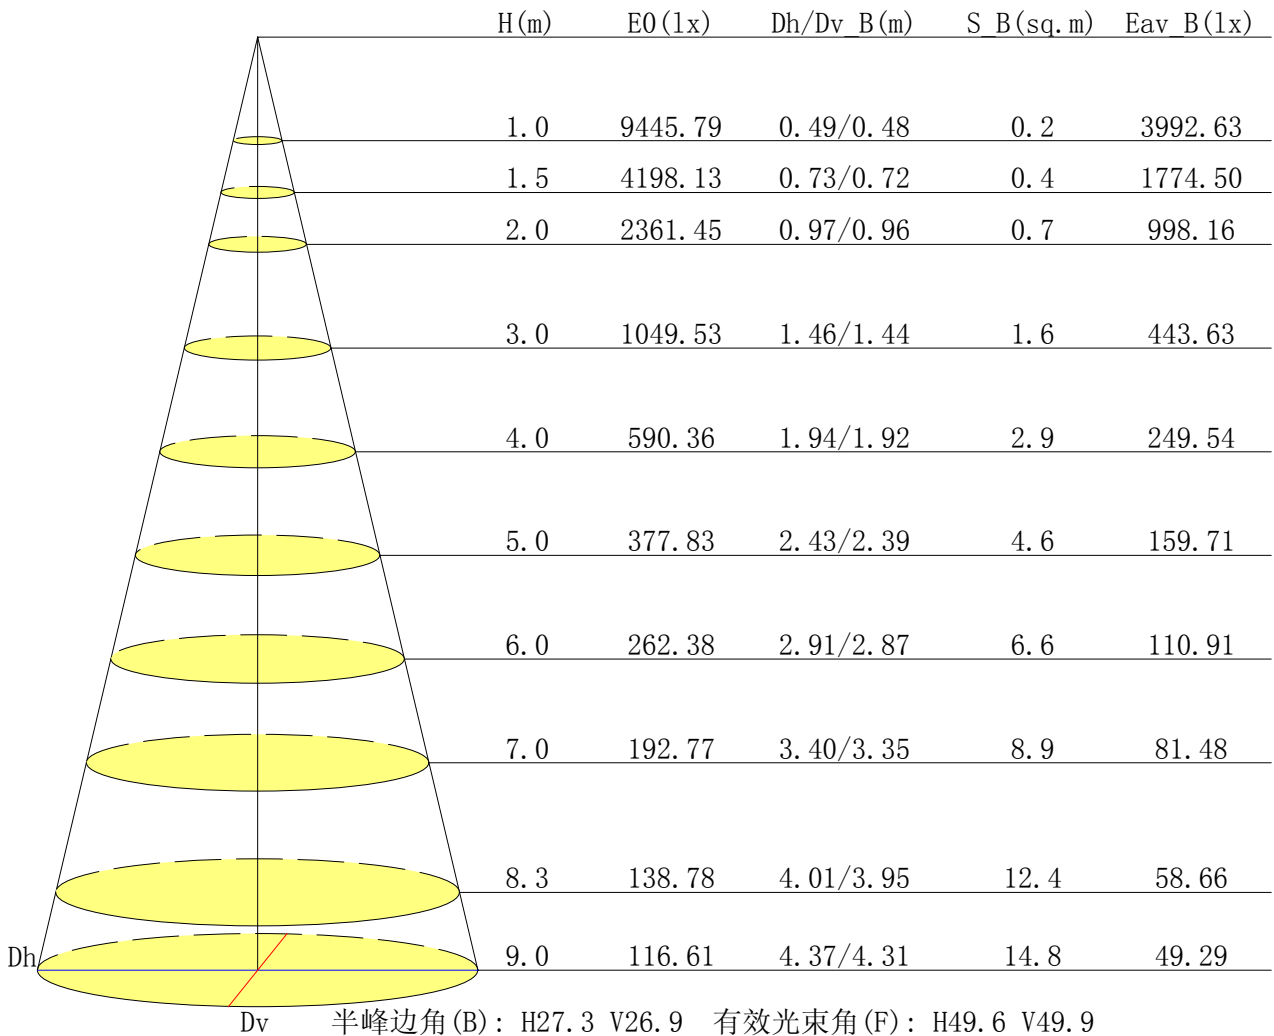

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600


测试距离: 8.650 m

环境湿度:

核 验:



垂直面等照度曲线

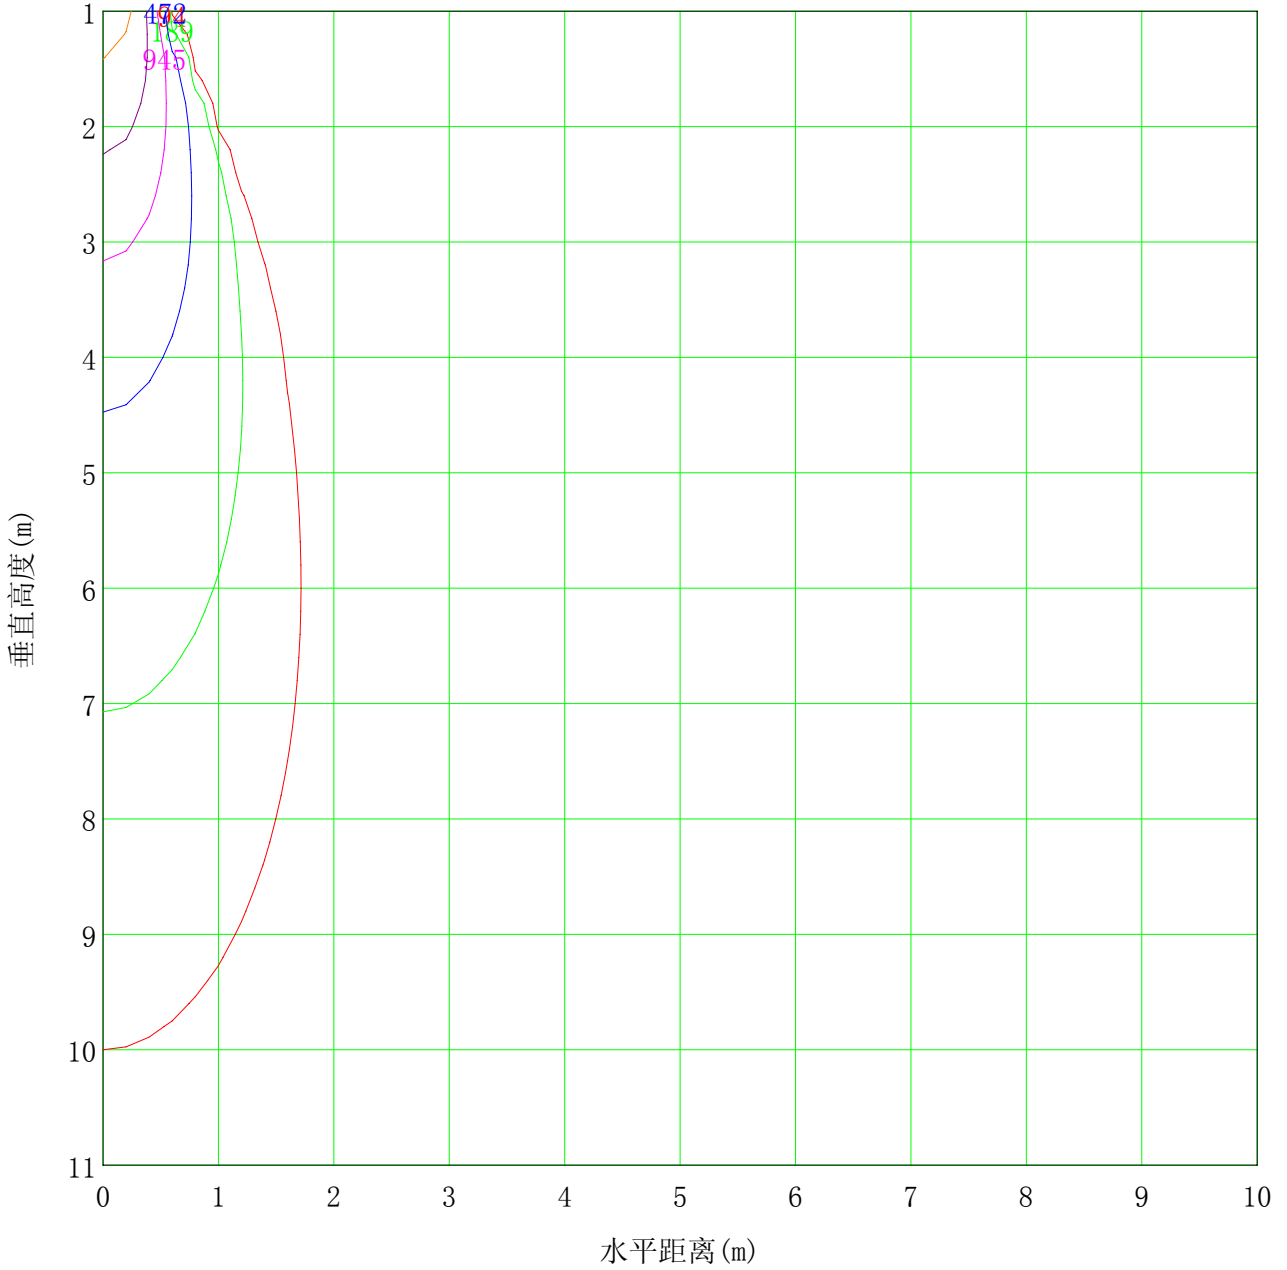

最低高度(米): 1m	最大高度(米): 11	最大照度值: 9446
— (1%): 94 lx	— (2%): 189 lx	
— (5%): 472 lx	— (10%): 945 lx	
— (20%): 1889 lx	— (50%): 4723 lx	
— (100%): 9446 lx		

C 平面 (°): 0.0-360.0: 90.0


测试单位:
测试类型: TYPE C
环境温度:
测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600
测试距离: 8.650 m
环境湿度:
核 验:



灯具有效平均照度图

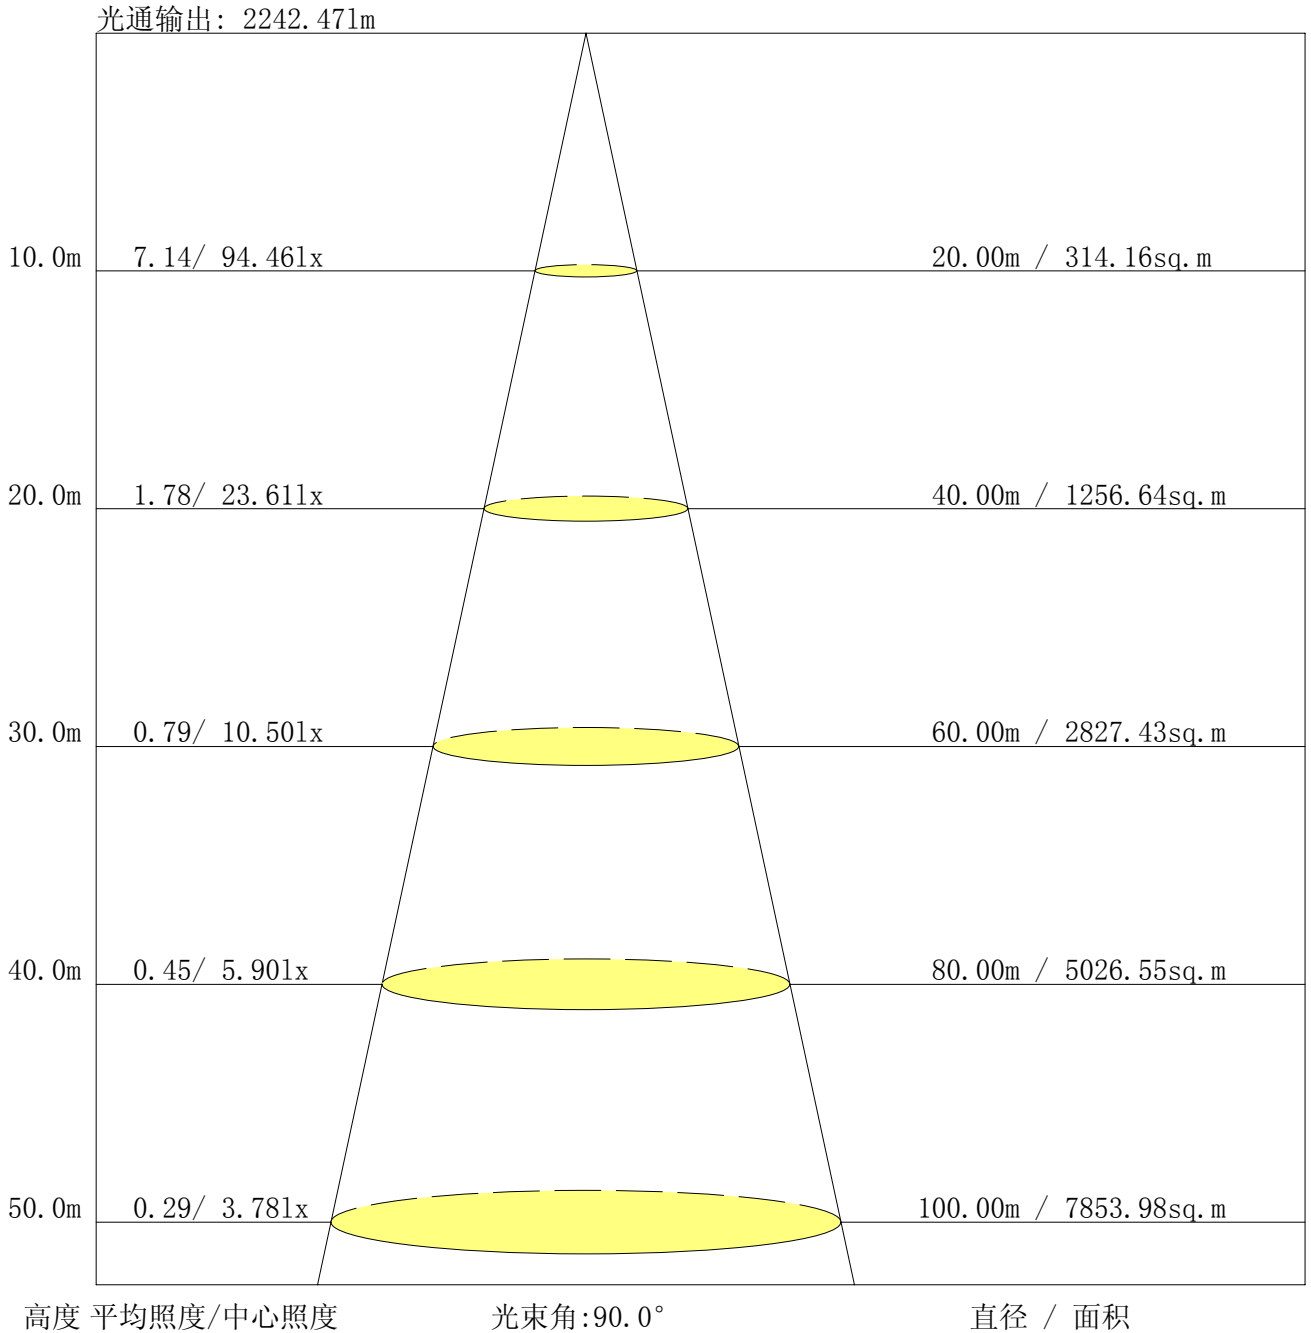

C 平面 (°): 0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验:



光强分布数据表格

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G0.0	9445.8	9052.4	9445.8	9052.4	9445.8					
G1.0	9418.0	9025.2	9402.4	9008.0	9418.0					
G2.0	9310.2	8939.3	9281.4	8889.1	9310.2					
G3.0	9135.2	8783.9	9094.5	8719.4	9135.2					
G4.0	8899.7	8567.6	8851.3	8483.6	8899.7					
G5.0	8596.5	8288.0	8555.5	8202.8	8596.5					
G6.0	8269.7	7961.2	8206.8	7861.3	8269.7					
G7.0	7891.7	7572.1	7823.3	7475.9	7891.7					
G8.0	7467.2	7149.4	7399.0	7047.9	7467.2					
G9.0	7017.3	6679.4	6928.2	6598.3	7017.3					
G10.0	6553.9	6211.8	6461.4	6147.3	6553.9					
G11.0	6058.5	5719.1	5971.3	5676.3	6058.5					
G12.0	5573.7	5246.7	5492.5	5205.7	5573.7					
G13.0	5066.9	4756.9	4988.7	4728.8	5066.9					
G14.0	4586.6	4298.5	4527.7	4248.3	4586.6					
G15.0	4102.6	3841.2	4046.3	3782.8	4102.6					
G16.0	3640.3	3418.2	3618.3	3362.2	3640.3					
G17.0	3212.6	3008.0	3196.2	2966.7	3212.6					
G18.0	2805.7	2638.1	2809.7	2613.8	2805.7					
G19.0	2425.4	2299.0	2453.4	2287.6	2425.4					
G20.0	2112.6	2007.7	2142.0	1986.3	2112.6					
G21.0	1811.8	1756.3	1858.9	1702.6	1811.8					
G22.0	1567.6	1545.6	1623.1	1425.3	1567.6					
G23.0	1333.9	1374.1	1405.0	1162.6	1333.9					
G24.0	1090.9	1211.2	1186.9	882.6	1090.9					
G25.0	781.7	1051.8	973.3	584.5	781.7					
G26.0	515.5	896.7	744.9	348.7	515.5					
G27.0	313.8	682.8	474.2	225.5	313.8					
G28.0	207.5	441.7	277.0	164.9	207.5					
G29.0	153.9	257.2	180.0	127.4	153.9					
G30.0	119.5	170.8	136.9	102.3	119.5					
G31.0	94.1	127.7	108.4	82.5	94.1					
G32.0	75.6	100.2	88.6	67.4	75.6					
G33.0	60.5	80.4	73.2	54.2	60.5					
G34.0	48.6	64.5	60.5	43.9	48.6					
G35.0	38.6	52.9	49.4	35.4	38.6					
G36.0	30.4	43.1	40.4	28.3	30.4					

C 平面 (°):0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°):0.0-180.0:1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



光强分布数据表格 (续 1)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G37.0	23.8	34.9	32.8	22.2	23.8					
G38.0	18.0	27.8	26.4	16.6	18.0					
G39.0	12.9	21.9	20.6	12.4	12.9					
G40.0	8.2	17.5	15.6	8.5	8.2					
G41.0	4.5	12.7	11.1	4.8	4.5					
G42.0	1.6	9.3	7.4	1.9	1.6					
G43.0	0.0	5.6	4.2	0.0	0.0					
G44.0	0.0	2.6	1.9	0.0	0.0					
G45.0	0.0	0.0	0.0	0.0	0.0					
G46.0	0.0	0.0	0.0	0.0	0.0					
G47.0	0.0	0.0	0.0	0.0	0.0					
G48.0	0.0	0.0	0.0	0.0	0.0					
G49.0	0.0	0.0	0.0	0.0	0.0					
G50.0	0.0	0.0	0.0	0.0	0.0					
G51.0	0.0	0.0	0.0	0.0	0.0					
G52.0	0.0	0.0	0.0	0.0	0.0					
G53.0	0.0	0.0	0.0	0.0	0.0					
G54.0	0.0	0.0	0.0	0.0	0.0					
G55.0	0.0	0.0	0.0	0.0	0.0					
G56.0	0.0	0.0	0.0	0.0	0.0					
G57.0	0.0	0.0	0.0	0.0	0.0					
G58.0	0.0	0.0	0.0	0.0	0.0					
G59.0	0.0	0.0	0.0	0.0	0.0					
G60.0	0.0	0.0	0.0	0.0	0.0					
G61.0	0.0	0.0	0.0	0.0	0.0					
G62.0	0.0	0.0	0.0	0.0	0.0					
G63.0	0.0	0.0	0.0	0.0	0.0					
G64.0	0.0	0.0	0.0	0.0	0.0					
G65.0	0.0	0.0	0.0	0.0	0.0					
G66.0	0.0	0.0	0.0	0.0	0.0					
G67.0	0.0	0.0	0.0	0.0	0.0					
G68.0	0.0	0.0	0.0	0.0	0.0					
G69.0	0.0	0.0	0.0	0.0	0.0					
G70.0	0.0	0.0	0.0	0.0	0.0					
G71.0	0.0	0.0	0.0	0.0	0.0					
G72.0	0.0	0.0	0.0	0.0	0.0					
G73.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°):0.0-360.0: 90.0

测试单位:
测试类型: TYPE C
环境温度:
测试员:

Gamma 平面 (°):0.0-180.0:1.0

测试设备: GPM-1600
测试距离: 8.650 m
环境湿度:
核 验:



光强分布数据表格 (续 2)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G74.0	0.0	0.0	0.0	0.0	0.0					
G75.0	0.0	0.0	0.0	0.0	0.0					
G76.0	0.0	0.0	0.0	0.0	0.0					
G77.0	0.0	0.0	0.0	0.0	0.0					
G78.0	0.0	0.0	0.0	0.0	0.0					
G79.0	0.0	0.0	0.0	0.0	0.0					
G80.0	0.0	0.0	0.0	0.0	0.0					
G81.0	0.0	0.0	0.0	0.0	0.0					
G82.0	0.0	0.0	0.0	0.0	0.0					
G83.0	0.0	0.0	0.0	0.0	0.0					
G84.0	0.0	0.0	0.0	0.0	0.0					
G85.0	0.0	0.0	0.0	0.0	0.0					
G86.0	0.0	0.0	0.0	0.0	0.0					
G87.0	0.0	0.0	0.0	0.0	0.0					
G88.0	0.0	0.0	0.0	0.0	0.0					
G89.0	0.0	0.0	0.0	0.0	0.0					
G90.0	0.0	0.0	0.0	0.0	0.0					
G91.0	0.0	0.0	0.0	0.0	0.0					
G92.0	0.0	0.0	0.0	0.0	0.0					
G93.0	0.0	0.0	0.0	0.0	0.0					
G94.0	0.0	0.0	0.0	0.0	0.0					
G95.0	0.0	0.0	0.0	0.0	0.0					
G96.0	0.0	0.0	0.0	0.0	0.0					
G97.0	0.0	0.0	0.0	0.0	0.0					
G98.0	0.0	0.0	0.0	0.0	0.0					
G99.0	0.0	0.0	0.0	0.0	0.0					
G100.0	0.0	0.0	0.0	0.0	0.0					
G101.0	0.0	0.0	0.0	0.0	0.0					
G102.0	0.0	0.0	0.0	0.0	0.0					
G103.0	0.0	0.0	0.0	0.0	0.0					
G104.0	0.0	0.0	0.0	0.0	0.0					
G105.0	0.0	0.0	0.0	0.0	0.0					
G106.0	0.0	0.0	0.0	0.0	0.0					
G107.0	0.0	0.0	0.0	0.0	0.0					
G108.0	0.0	0.0	0.0	0.0	0.0					
G109.0	0.0	0.0	0.0	0.0	0.0					
G110.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°):0.0-360.0: 90.0

测试单位:
测试类型: TYPE C
环境温度:
测试员:

Gamma 平面 (°):0.0-180.0:1.0

测试设备: GPM-1600
测试距离: 8.650 m
环境湿度:
核 验:



光强分布数据表格 (续 3)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G111.0	0.0	0.0	0.0	0.0	0.0					
G112.0	0.0	0.0	0.0	0.0	0.0					
G113.0	0.0	0.0	0.0	0.0	0.0					
G114.0	0.0	0.0	0.0	0.0	0.0					
G115.0	0.0	0.0	0.0	0.0	0.0					
G116.0	0.0	0.0	0.0	0.0	0.0					
G117.0	0.0	0.0	0.0	0.0	0.0					
G118.0	0.0	0.0	0.0	0.0	0.0					
G119.0	0.0	0.0	0.0	0.0	0.0					
G120.0	0.0	0.0	0.0	0.0	0.0					
G121.0	0.0	0.0	0.0	0.0	0.0					
G122.0	0.0	0.0	0.0	0.0	0.0					
G123.0	0.0	0.0	0.0	0.0	0.0					
G124.0	0.0	0.0	0.0	0.0	0.0					
G125.0	0.0	0.0	0.0	0.0	0.0					
G126.0	0.0	0.0	0.0	0.0	0.0					
G127.0	0.0	0.0	0.0	0.0	0.0					
G128.0	0.0	0.0	0.0	0.0	0.0					
G129.0	0.0	0.0	0.0	0.0	0.0					
G130.0	0.0	0.0	0.0	0.0	0.0					
G131.0	0.0	0.0	0.0	0.0	0.0					
G132.0	0.0	0.0	0.0	0.0	0.0					
G133.0	0.0	0.0	0.0	0.0	0.0					
G134.0	0.0	0.0	0.0	0.0	0.0					
G135.0	0.0	0.0	0.0	0.0	0.0					
G136.0	0.0	0.0	0.0	0.0	0.0					
G137.0	0.0	0.0	0.0	0.0	0.0					
G138.0	0.0	0.0	0.0	0.0	0.0					
G139.0	0.0	0.0	0.0	0.0	0.0					
G140.0	0.0	0.0	0.0	0.0	0.0					
G141.0	0.0	0.0	0.0	0.0	0.0					
G142.0	0.0	0.0	0.0	0.0	0.0					
G143.0	0.0	0.0	0.0	0.0	0.0					
G144.0	0.0	0.0	0.0	0.0	0.0					
G145.0	0.0	0.0	0.0	0.0	0.0					
G146.0	0.0	0.0	0.0	0.0	0.0					
G147.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°):0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°):0.0-180.0:1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验:



光强分布数据表格 (续 4)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G148.0	0.0	0.0	0.0	0.0	0.0					
G149.0	0.0	0.0	0.0	0.0	0.0					
G150.0	0.0	0.0	0.0	0.0	0.0					
G151.0	0.0	0.0	0.0	0.0	0.0					
G152.0	0.0	0.0	0.0	0.0	0.0					
G153.0	0.0	0.0	0.0	0.0	0.0					
G154.0	0.0	0.0	0.0	0.0	0.0					
G155.0	0.0	0.0	0.0	0.0	0.0					
G156.0	0.0	0.0	0.0	0.0	0.0					
G157.0	0.0	0.0	0.0	0.0	0.0					
G158.0	0.0	0.0	0.0	0.0	0.0					
G159.0	0.0	0.0	0.0	0.0	0.0					
G160.0	0.0	0.0	0.0	0.0	0.0					
G161.0	0.0	0.0	0.0	0.0	0.0					
G162.0	0.0	0.0	0.0	0.0	0.0					
G163.0	0.0	0.0	0.0	0.0	0.0					
G164.0	0.0	0.0	0.0	0.0	0.0					
G165.0	0.0	0.0	0.0	0.0	0.0					
G166.0	0.0	0.0	0.0	0.0	0.0					
G167.0	0.0	0.0	0.0	0.0	0.0					
G168.0	0.0	0.0	0.0	0.0	0.0					
G169.0	0.0	0.0	0.0	0.0	0.0					
G170.0	0.0	0.0	0.0	0.0	0.0					
G171.0	0.0	0.0	0.0	0.0	0.0					
G172.0	0.0	0.0	0.0	0.0	0.0					
G173.0	0.0	0.0	0.0	0.0	0.0					
G174.0	0.0	0.0	0.0	0.0	0.0					
G175.0	0.0	0.0	0.0	0.0	0.0					
G176.0	0.0	0.0	0.0	0.0	0.0					
G177.0	0.0	0.0	0.0	0.0	0.0					
G178.0	0.0	0.0	0.0	0.0	0.0					
G179.0	0.0	0.0	0.0	0.0	0.0					
G180.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°):0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°):0.0-180.0:1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验: