

报告编号:

测试时间: 2019-06-08 13:29

产品特征

灯具制造厂商:

灯具型号: XQ613030.02W-D15

电压: 221.3 V

功率: 28.10 W

光源个数: 1

电流: 0.132 A

功率因数: 0.962

光度结果

灯具CIE分类: 直接型

灯具光通量: 1839 lm

下射光通量比: 100%

水平扩散角 (25%, 50%, 75%, 100%): H26.5, H17.6, H10.6, H0

垂直扩散角 (25%, 50%, 75%, 100%): V26.6, V18, V11, V1

灯具光效等级 (LER): 65

峰值光强: 12884.1 cd

额定光通量: 1839.0 lm

灯具效率: 100%

上射光通量比: 0%


中心光强: 12884.1 cd

峰值光强位置: H0 V0

灯具实物照片



配光曲线

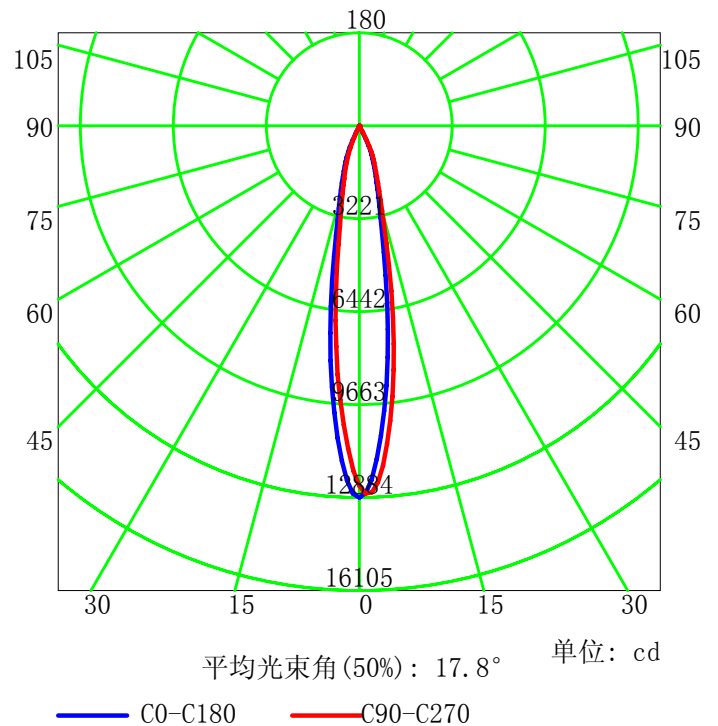

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600



测试距离: 8.650 m

环境湿度:

核 验:



配光曲线

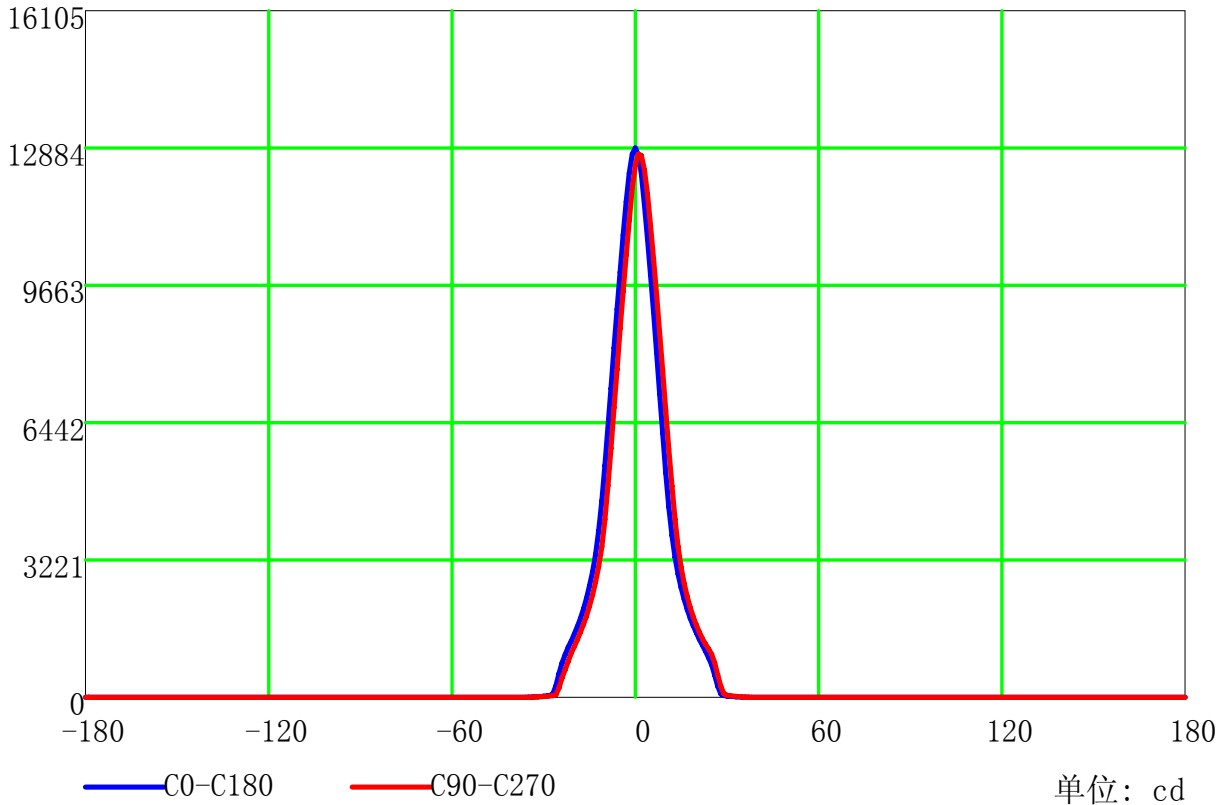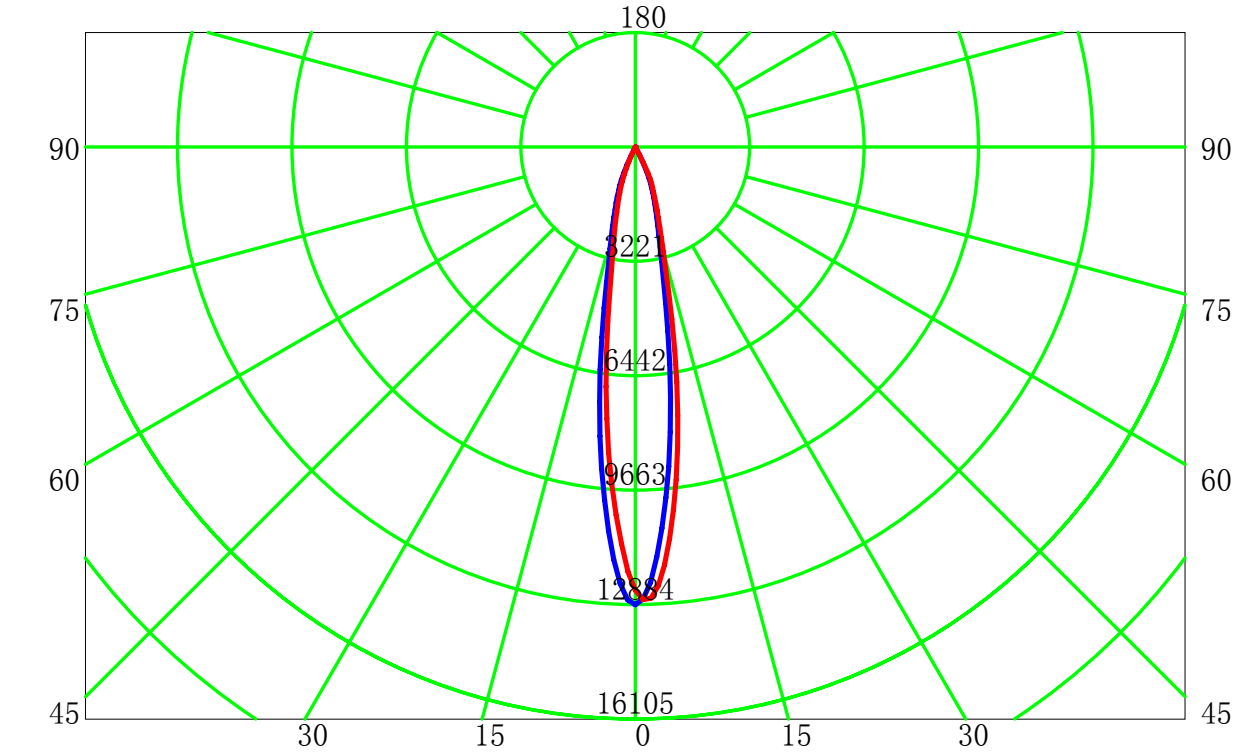

C 平面 (°):0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°):0.0-180.0:1.0

测试设备: GPM-1600


测试距离: 8.650 m

环境湿度:

核 验:



配光曲线(cd/klm)

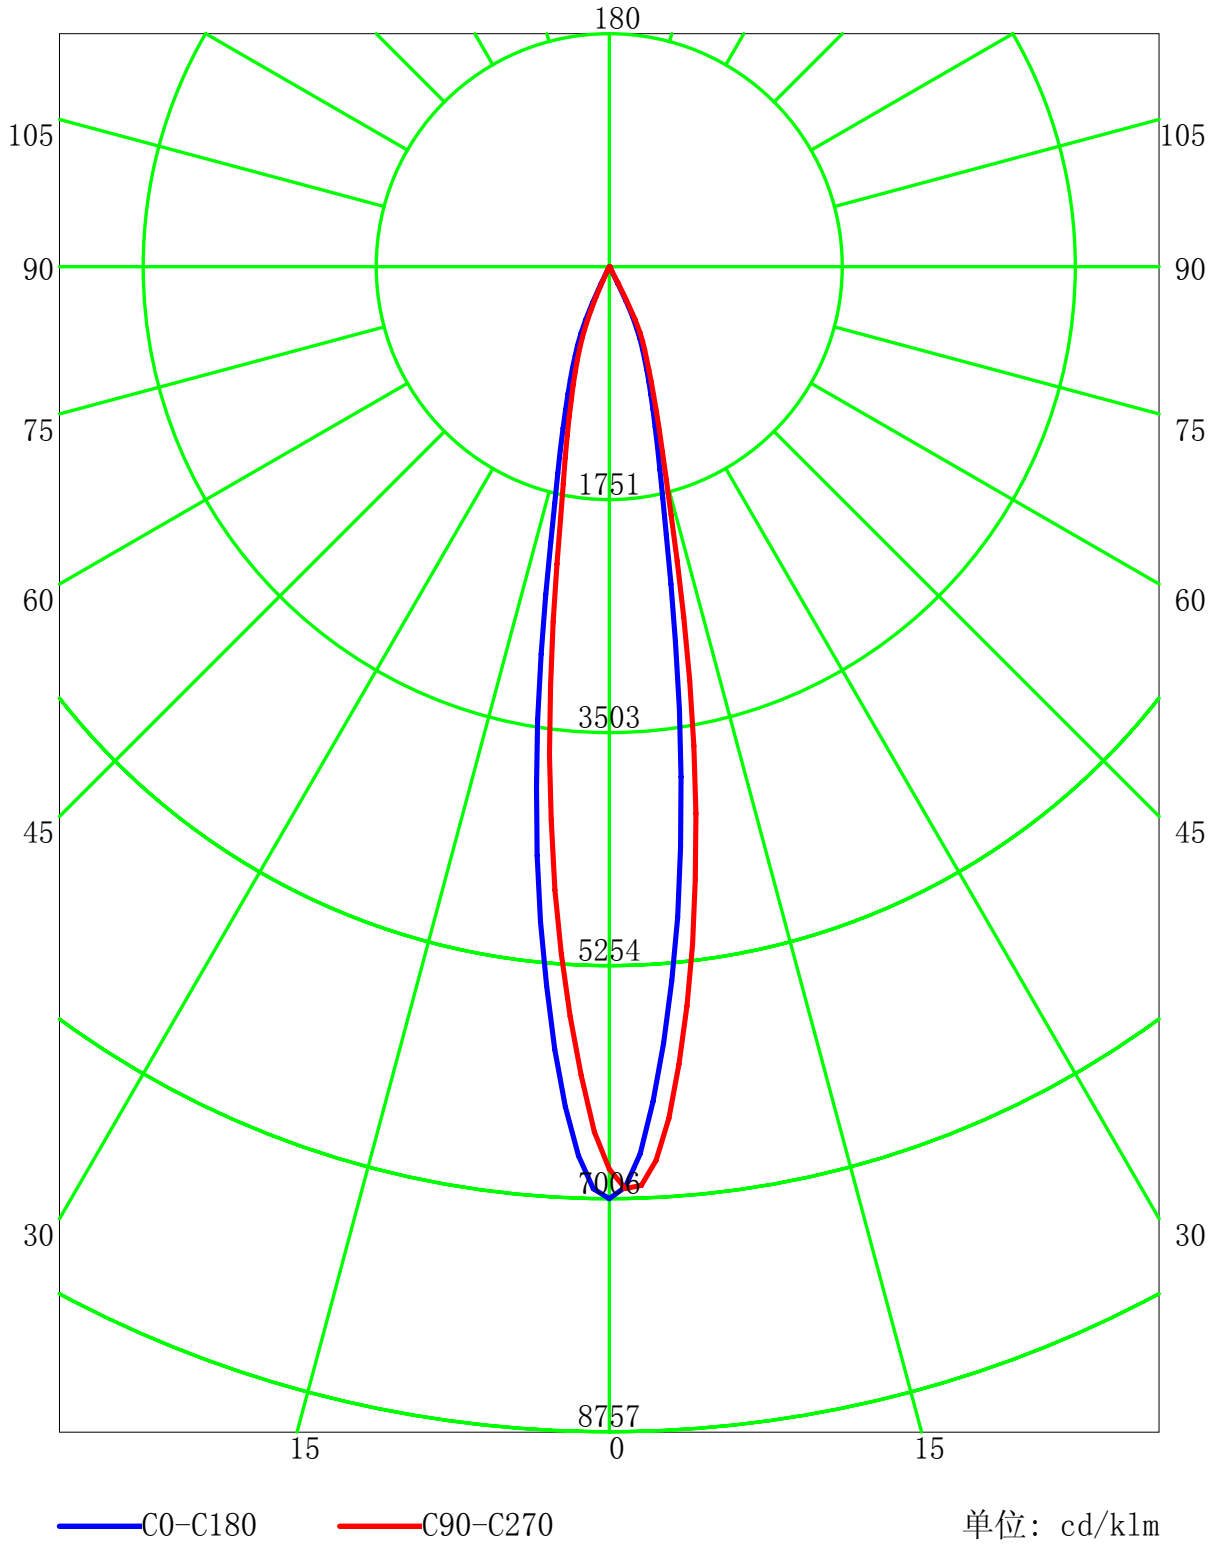

C 平面 (°): 0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验:




室内灯具利用系数表

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97
2	112	109	106	104	110	107	105	102	104	102	100	101	99	98	98	97	96	95
3	109	105	101	99	107	103	100	98	101	98	96	99	97	95	96	95	93	92
4	106	101	97	95	104	100	97	94	98	95	93	96	94	92	95	93	91	90
5	103	98	94	91	102	97	93	91	95	92	90	94	91	89	93	90	89	88
6	101	95	91	88	99	94	91	88	93	90	88	92	89	87	91	88	87	86
7	98	92	89	86	97	92	88	86	91	88	85	90	87	85	89	86	85	84
8	96	90	86	84	95	89	86	83	89	85	83	88	85	83	87	84	83	82
9	94	88	84	82	93	87	84	81	87	83	81	86	83	81	85	83	81	80
10	92	86	82	80	91	85	82	80	85	82	79	84	81	79	84	81	79	78

最大允许安装距离高度比(横向): 0.30
 最大允许安装距离高度比(纵向): 0.31
 最大允许安装距离高度比(对角): 0.32

灯具概算曲线

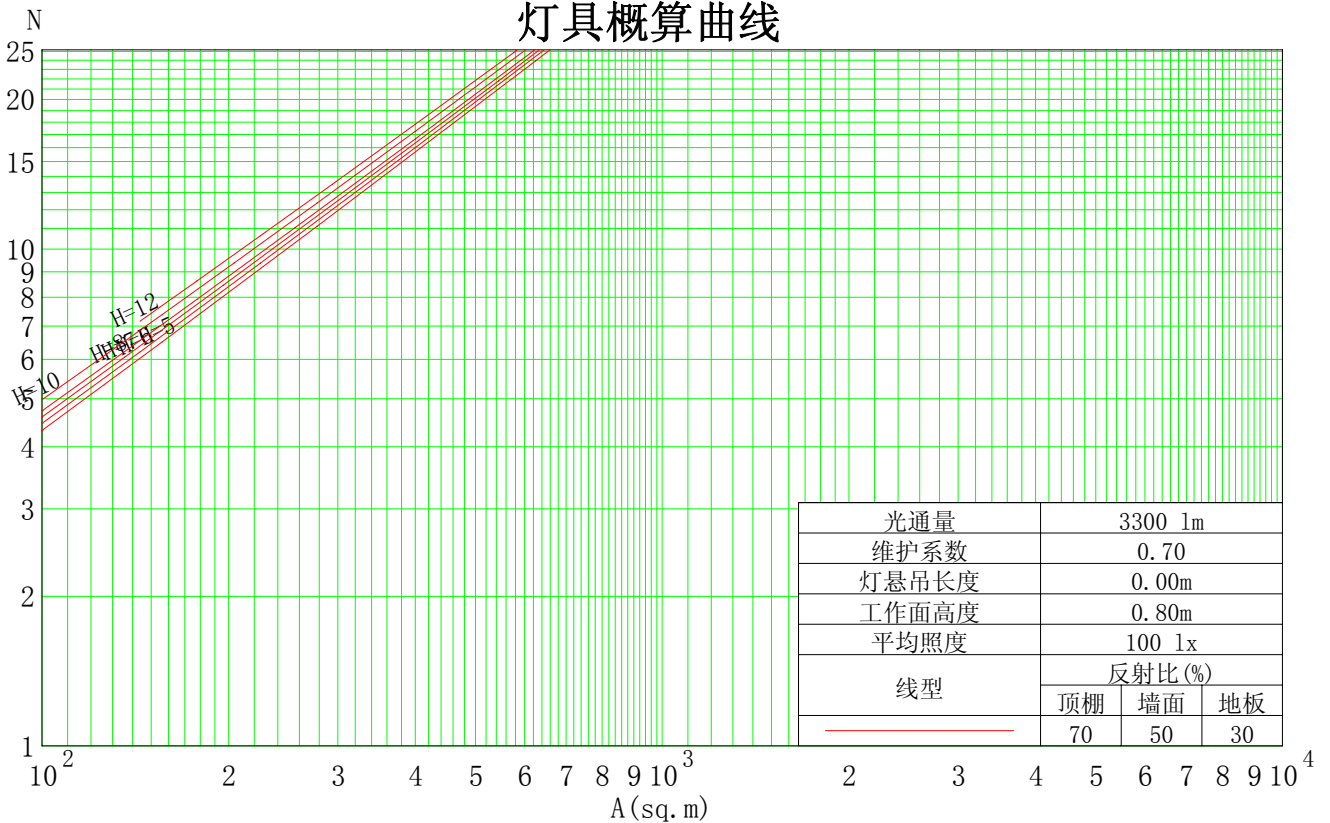


C 平面 (°): 0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验:



水平面等照度曲线

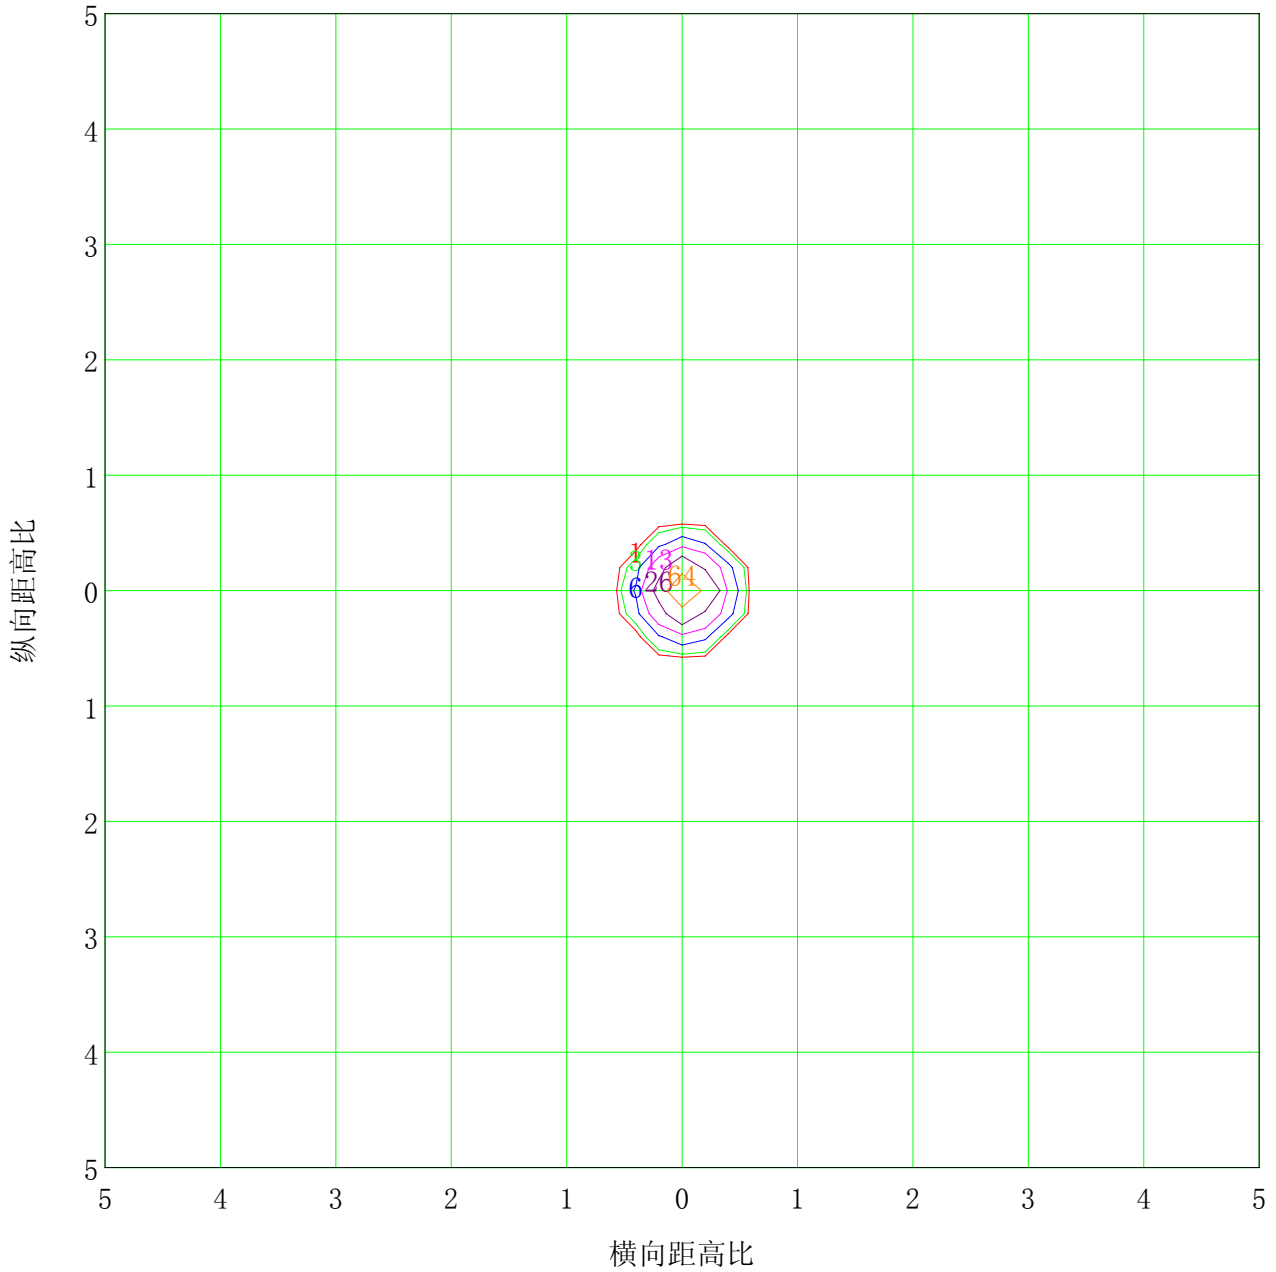

安装高度: 10m		最大照度值(100%): 129 lx	
— (1%):	1 lx	— (2%):	3 lx
— (5%):	6 lx	— (10%):	13 lx
— (20%):	26 lx	— (50%):	64 lx
— (100%):	129 lx		



C 平面 (°): 0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验:



亮度限制曲线

眩光评价值	质量等级	使用照度 / lx							
		a	b	c	d	e	f	g	h
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

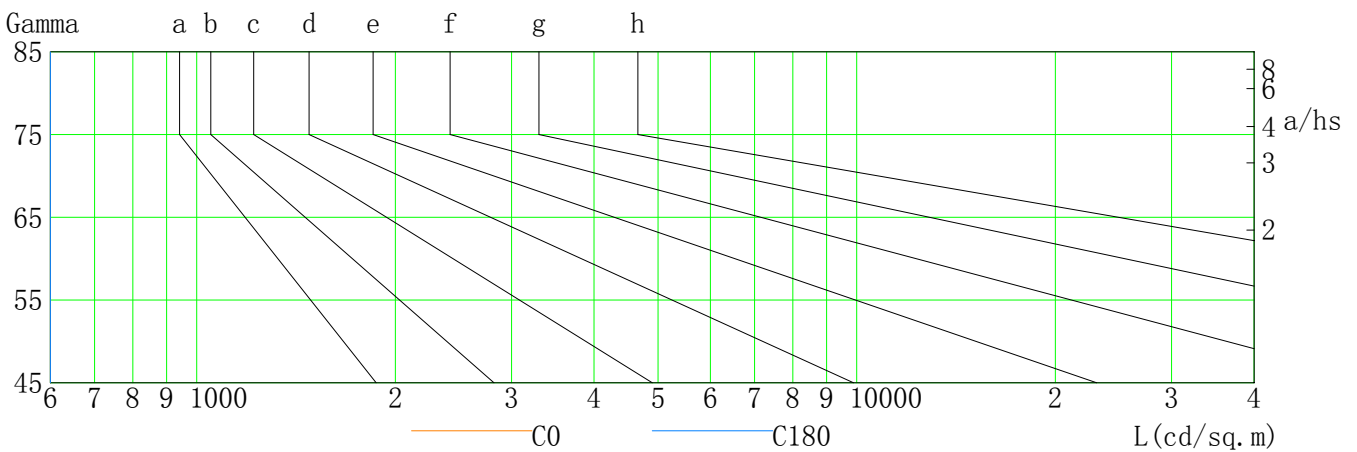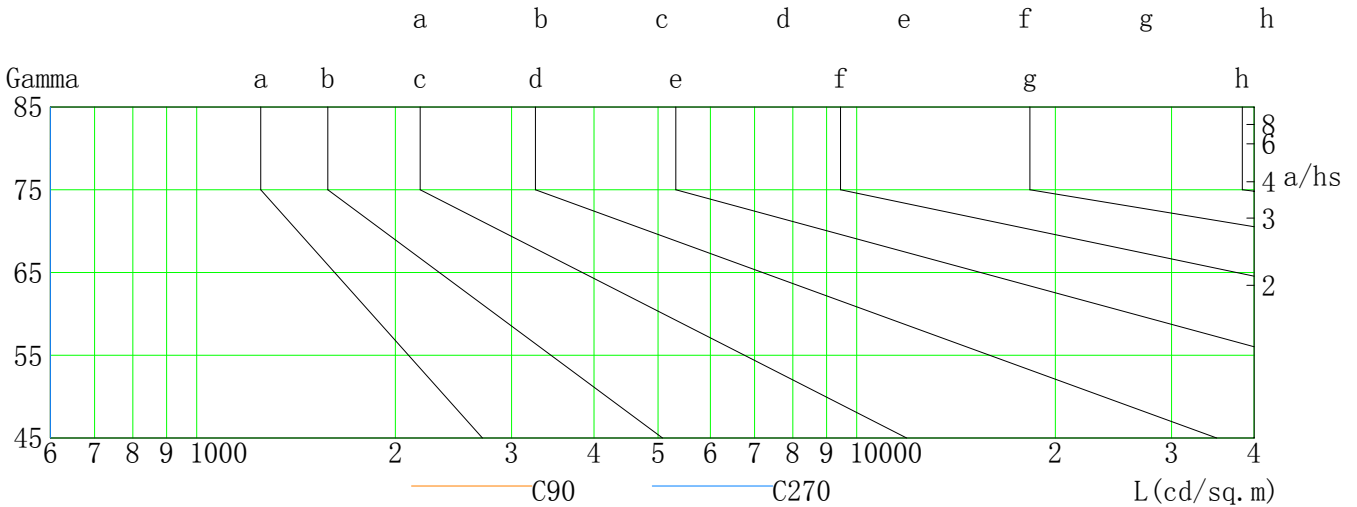

L (cd/sq. m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	0	0	0	0	0	0	0	0	0
C90	0	0	0	0	0	0	0	0	0
C180	0	0	0	0	0	0	0	0	0
C270	0	0	0	0	0	0	0	0	0

C 平面 (°): 0.0-360.0: 90.0


测试单位:
测试类型: TYPE C
环境温度:
测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600
测试距离: 8.650 m
环境湿度:
核 验:



照度距离关系图

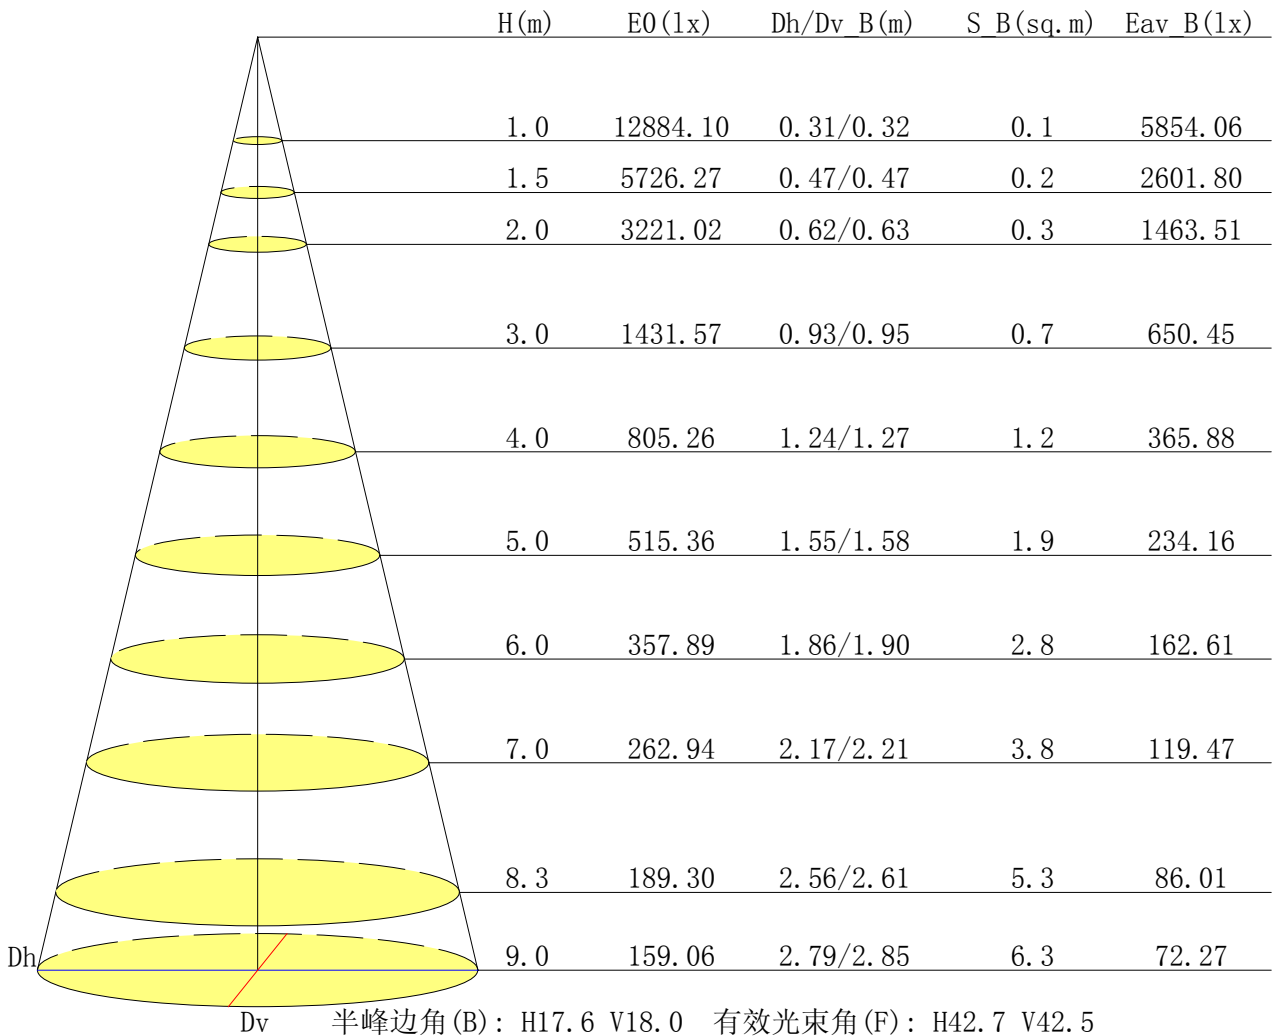


C 平面 (°): 0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验:



垂直面等照度曲线

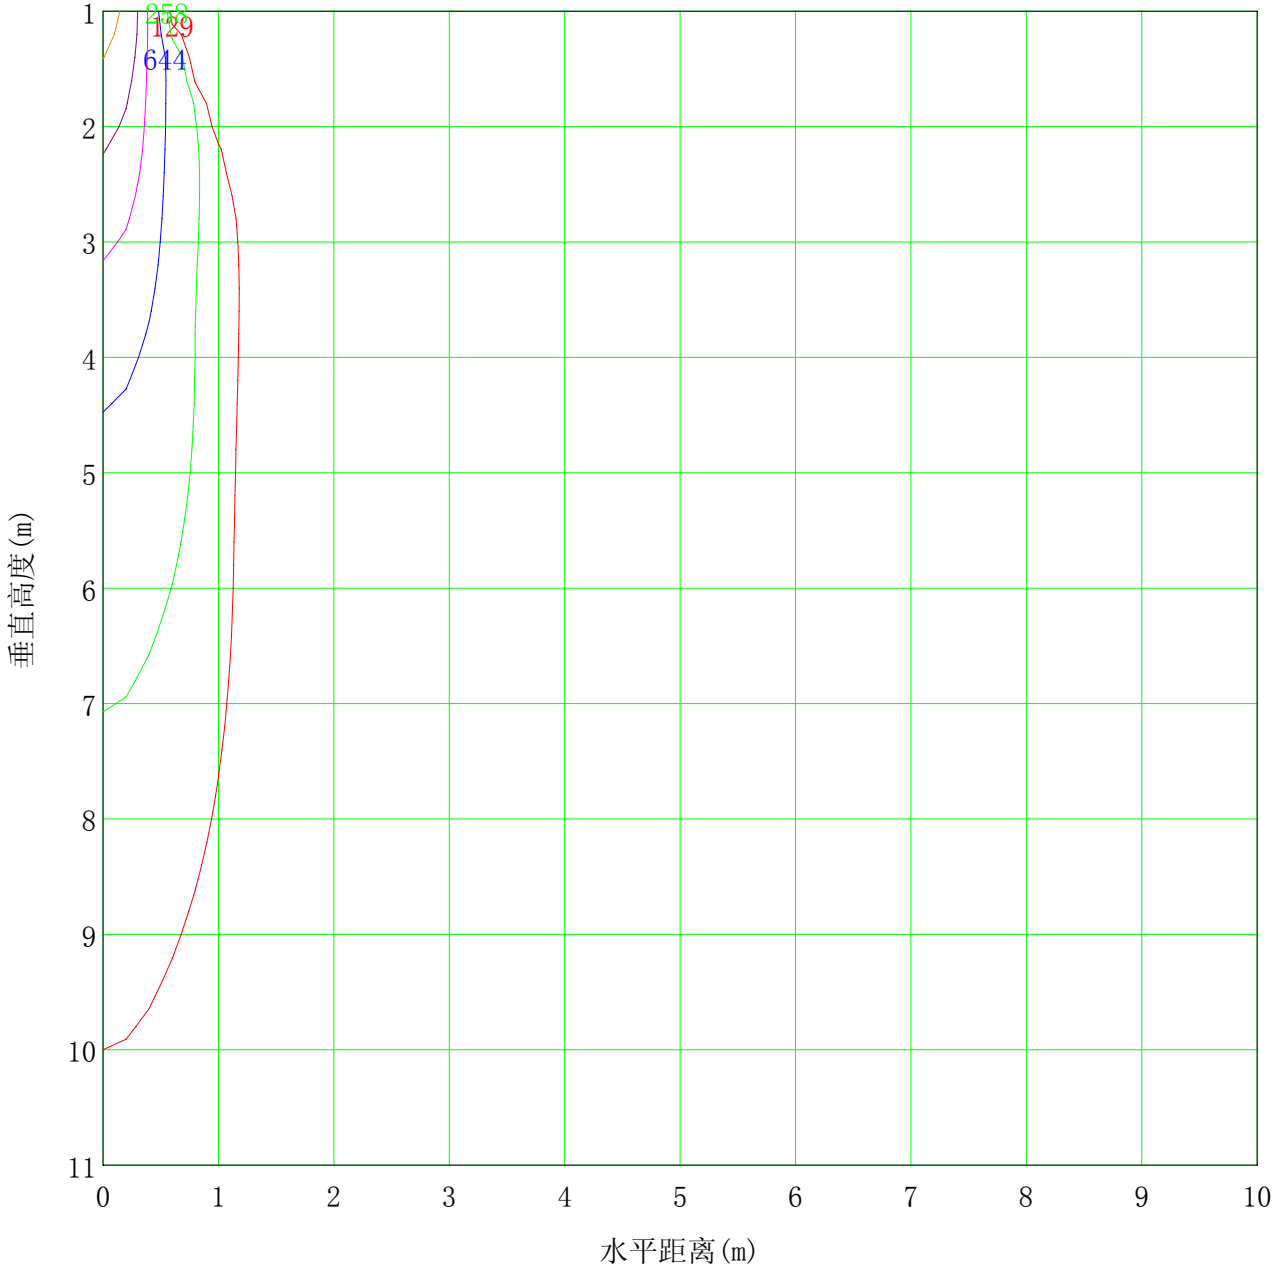

最低高度(米): 1m	最大高度(米): 11	最大照度值: 12884
— (1%): 129 lx	— (2%): 258 lx	— (10%): 1288 lx
— (5%): 644 lx	— (20%): 2577 lx	— (50%): 6442 lx
— (100%): 12884 lx		

C 平面 (°): 0.0-360.0: 90.0


测试单位:
测试类型: TYPE C
环境温度:
测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600
测试距离: 8.650 m
环境湿度:
核 验:



灯具有效平均照度图

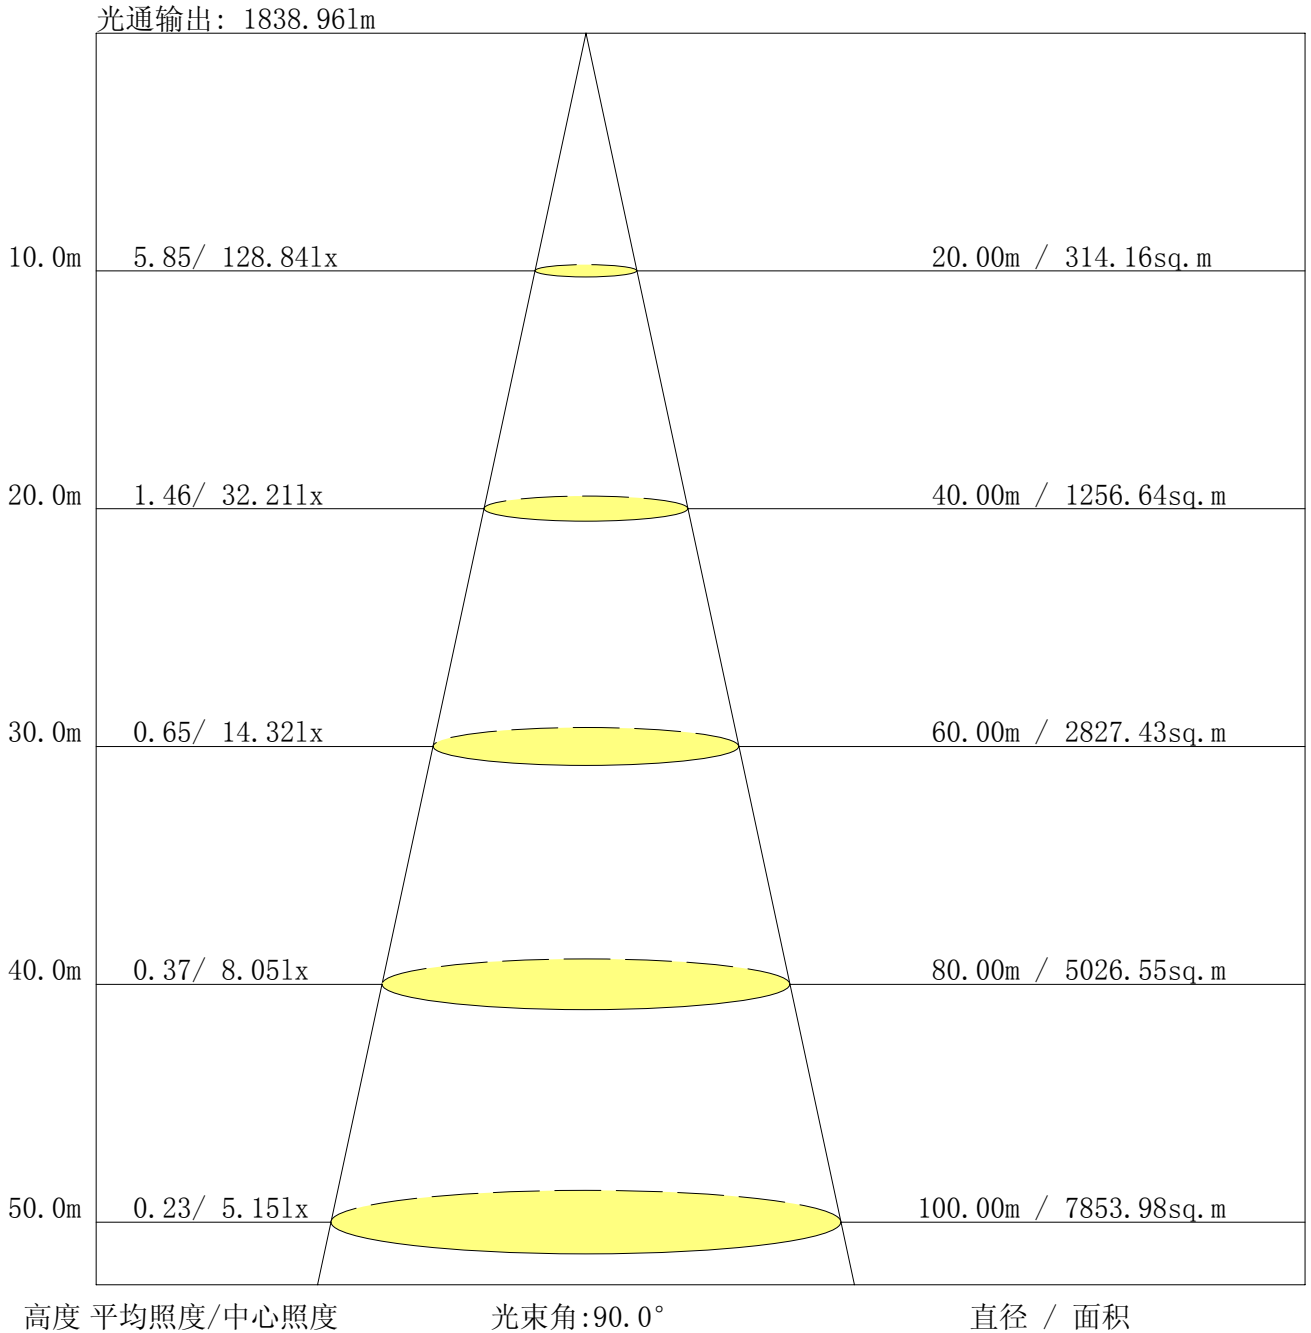

C 平面 (°): 0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验:



光强分布数据表格

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G0.0	12884.1	12476.0	12884.1	12476.0	12884.1					
G1.0	12723.4	12745.1	12748.2	11958.4	12723.4					
G2.0	12269.2	12707.5	12295.2	11183.8	12269.2					
G3.0	11555.0	12370.2	11626.9	10376.0	11555.0					
G4.0	10760.4	11800.3	10845.5	9522.7	10760.4					
G5.0	9912.3	11066.0	9973.2	8651.4	9912.3					
G6.0	9043.2	10276.1	9104.5	7687.6	9043.2					
G7.0	8086.8	9440.8	8202.0	6795.2	8086.8					
G8.0	7123.0	8545.7	7248.3	5840.9	7123.0					
G9.0	6199.4	7651.7	6342.7	4969.7	6199.4					
G10.0	5267.3	6727.5	5439.1	4171.9	5267.3					
G11.0	4469.0	5824.0	4612.3	3534.8	4469.0					
G12.0	3796.5	4953.3	3900.6	3073.3	3796.5					
G13.0	3285.8	4176.6	3356.6	2716.9	3285.8					
G14.0	2893.0	3536.9	2945.3	2406.1	2893.0					
G15.0	2574.7	3049.5	2618.6	2147.0	2574.7					
G16.0	2302.4	2670.4	2323.1	1909.1	2302.4					
G17.0	2066.1	2369.6	2068.8	1710.3	2066.1					
G18.0	1855.7	2107.4	1847.8	1528.4	1855.7					
G19.0	1679.6	1887.9	1661.7	1354.5	1679.6					
G20.0	1517.9	1697.1	1489.3	1190.6	1517.9					
G21.0	1359.3	1529.5	1319.1	1042.6	1359.3					
G22.0	1224.4	1380.9	1180.0	846.4	1224.4					
G23.0	1088.0	1251.4	1003.5	655.6	1088.0					
G24.0	927.3	1135.6	806.3	456.8	927.3					
G25.0	765.5	1008.7	558.3	217.8	765.5					
G26.0	520.8	808.9	270.7	61.3	520.8					
G27.0	261.7	522.3	84.6	39.1	261.7					
G28.0	81.4	260.1	42.3	31.2	81.4					
G29.0	42.3	85.7	33.3	25.4	42.3					
G30.0	33.3	49.2	27.0	19.6	33.3					
G31.0	25.9	39.1	21.7	15.9	25.9					
G32.0	20.1	30.7	16.4	10.6	20.1					
G33.0	14.8	22.7	11.6	7.9	14.8					
G34.0	10.1	16.4	7.4	4.8	10.1					
G35.0	7.4	11.1	4.8	2.6	7.4					
G36.0	4.2	6.9	2.6	0.0	4.2					

C 平面 (°):0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°):0.0-180.0:1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



光强分布数据表格 (续 1)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G37.0	2.6	4.2	0.5	0.0	2.6					
G38.0	0.0	2.1	0.0	0.0	0.0					
G39.0	0.0	0.0	0.0	0.0	0.0					
G40.0	0.0	0.0	0.0	0.0	0.0					
G41.0	0.0	0.0	0.0	0.0	0.0					
G42.0	0.0	0.0	0.0	0.0	0.0					
G43.0	0.0	0.0	0.0	0.0	0.0					
G44.0	0.0	0.0	0.0	0.0	0.0					
G45.0	0.0	0.0	0.0	0.0	0.0					
G46.0	0.0	0.0	0.0	0.0	0.0					
G47.0	0.0	0.0	0.0	0.0	0.0					
G48.0	0.0	0.0	0.0	0.0	0.0					
G49.0	0.0	0.0	0.0	0.0	0.0					
G50.0	0.0	0.0	0.0	0.0	0.0					
G51.0	0.0	0.0	0.0	0.0	0.0					
G52.0	0.0	0.0	0.0	0.0	0.0					
G53.0	0.0	0.0	0.0	0.0	0.0					
G54.0	0.0	0.0	0.0	0.0	0.0					
G55.0	0.0	0.0	0.0	0.0	0.0					
G56.0	0.0	0.0	0.0	0.0	0.0					
G57.0	0.0	0.0	0.0	0.0	0.0					
G58.0	0.0	0.0	0.0	0.0	0.0					
G59.0	0.0	0.0	0.0	0.0	0.0					
G60.0	0.0	0.0	0.0	0.0	0.0					
G61.0	0.0	0.0	0.0	0.0	0.0					
G62.0	0.0	0.0	0.0	0.0	0.0					
G63.0	0.0	0.0	0.0	0.0	0.0					
G64.0	0.0	0.0	0.0	0.0	0.0					
G65.0	0.0	0.0	0.0	0.0	0.0					
G66.0	0.0	0.0	0.0	0.0	0.0					
G67.0	0.0	0.0	0.0	0.0	0.0					
G68.0	0.0	0.0	0.0	0.0	0.0					
G69.0	0.0	0.0	0.0	0.0	0.0					
G70.0	0.0	0.0	0.0	0.0	0.0					
G71.0	0.0	0.0	0.0	0.0	0.0					
G72.0	0.0	0.0	0.0	0.0	0.0					
G73.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°):0.0-360.0: 90.0

测试单位:
测试类型: TYPE C
环境温度:
测试员:

Gamma 平面 (°):0.0-180.0:1.0

测试设备: GPM-1600
测试距离: 8.650 m
环境湿度:
核 验:



光强分布数据表格 (续 2)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G74.0	0.0	0.0	0.0	0.0	0.0					
G75.0	0.0	0.0	0.0	0.0	0.0					
G76.0	0.0	0.0	0.0	0.0	0.0					
G77.0	0.0	0.0	0.0	0.0	0.0					
G78.0	0.0	0.0	0.0	0.0	0.0					
G79.0	0.0	0.0	0.0	0.0	0.0					
G80.0	0.0	0.0	0.0	0.0	0.0					
G81.0	0.0	0.0	0.0	0.0	0.0					
G82.0	0.0	0.0	0.0	0.0	0.0					
G83.0	0.0	0.0	0.0	0.0	0.0					
G84.0	0.0	0.0	0.0	0.0	0.0					
G85.0	0.0	0.0	0.0	0.0	0.0					
G86.0	0.0	0.0	0.0	0.0	0.0					
G87.0	0.0	0.0	0.0	0.0	0.0					
G88.0	0.0	0.0	0.0	0.0	0.0					
G89.0	0.0	0.0	0.0	0.0	0.0					
G90.0	0.0	0.0	0.0	0.0	0.0					
G91.0	0.0	0.0	0.0	0.0	0.0					
G92.0	0.0	0.0	0.0	0.0	0.0					
G93.0	0.0	0.0	0.0	0.0	0.0					
G94.0	0.0	0.0	0.0	0.0	0.0					
G95.0	0.0	0.0	0.0	0.0	0.0					
G96.0	0.0	0.0	0.0	0.0	0.0					
G97.0	0.0	0.0	0.0	0.0	0.0					
G98.0	0.0	0.0	0.0	0.0	0.0					
G99.0	0.0	0.0	0.0	0.0	0.0					
G100.0	0.0	0.0	0.0	0.0	0.0					
G101.0	0.0	0.0	0.0	0.0	0.0					
G102.0	0.0	0.0	0.0	0.0	0.0					
G103.0	0.0	0.0	0.0	0.0	0.0					
G104.0	0.0	0.0	0.0	0.0	0.0					
G105.0	0.0	0.0	0.0	0.0	0.0					
G106.0	0.0	0.0	0.0	0.0	0.0					
G107.0	0.0	0.0	0.0	0.0	0.0					
G108.0	0.0	0.0	0.0	0.0	0.0					
G109.0	0.0	0.0	0.0	0.0	0.0					
G110.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°):0.0-360.0: 90.0

测试单位:
测试类型: TYPE C
环境温度:
测试员:

Gamma 平面 (°):0.0-180.0:1.0

测试设备: GPM-1600
测试距离: 8.650 m
环境湿度:
核 验:



光强分布数据表格 (续 3)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G111.0	0.0	0.0	0.0	0.0	0.0					
G112.0	0.0	0.0	0.0	0.0	0.0					
G113.0	0.0	0.0	0.0	0.0	0.0					
G114.0	0.0	0.0	0.0	0.0	0.0					
G115.0	0.0	0.0	0.0	0.0	0.0					
G116.0	0.0	0.0	0.0	0.0	0.0					
G117.0	0.0	0.0	0.0	0.0	0.0					
G118.0	0.0	0.0	0.0	0.0	0.0					
G119.0	0.0	0.0	0.0	0.0	0.0					
G120.0	0.0	0.0	0.0	0.0	0.0					
G121.0	0.0	0.0	0.0	0.0	0.0					
G122.0	0.0	0.0	0.0	0.0	0.0					
G123.0	0.0	0.0	0.0	0.0	0.0					
G124.0	0.0	0.0	0.0	0.0	0.0					
G125.0	0.0	0.0	0.0	0.0	0.0					
G126.0	0.0	0.0	0.0	0.0	0.0					
G127.0	0.0	0.0	0.0	0.0	0.0					
G128.0	0.0	0.0	0.0	0.0	0.0					
G129.0	0.0	0.0	0.0	0.0	0.0					
G130.0	0.0	0.0	0.0	0.0	0.0					
G131.0	0.0	0.0	0.0	0.0	0.0					
G132.0	0.0	0.0	0.0	0.0	0.0					
G133.0	0.0	0.0	0.0	0.0	0.0					
G134.0	0.0	0.0	0.0	0.0	0.0					
G135.0	0.0	0.0	0.0	0.0	0.0					
G136.0	0.0	0.0	0.0	0.0	0.0					
G137.0	0.0	0.0	0.0	0.0	0.0					
G138.0	0.0	0.0	0.0	0.0	0.0					
G139.0	0.0	0.0	0.0	0.0	0.0					
G140.0	0.0	0.0	0.0	0.0	0.0					
G141.0	0.0	0.0	0.0	0.0	0.0					
G142.0	0.0	0.0	0.0	0.0	0.0					
G143.0	0.0	0.0	0.0	0.0	0.0					
G144.0	0.0	0.0	0.0	0.0	0.0					
G145.0	0.0	0.0	0.0	0.0	0.0					
G146.0	0.0	0.0	0.0	0.0	0.0					
G147.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°):0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°):0.0-180.0:1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验:



光强分布数据表格 (续 4)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G148.0	0.0	0.0	0.0	0.0	0.0					
G149.0	0.0	0.0	0.0	0.0	0.0					
G150.0	0.0	0.0	0.0	0.0	0.0					
G151.0	0.0	0.0	0.0	0.0	0.0					
G152.0	0.0	0.0	0.0	0.0	0.0					
G153.0	0.0	0.0	0.0	0.0	0.0					
G154.0	0.0	0.0	0.0	0.0	0.0					
G155.0	0.0	0.0	0.0	0.0	0.0					
G156.0	0.0	0.0	0.0	0.0	0.0					
G157.0	0.0	0.0	0.0	0.0	0.0					
G158.0	0.0	0.0	0.0	0.0	0.0					
G159.0	0.0	0.0	0.0	0.0	0.0					
G160.0	0.0	0.0	0.0	0.0	0.0					
G161.0	0.0	0.0	0.0	0.0	0.0					
G162.0	0.0	0.0	0.0	0.0	0.0					
G163.0	0.0	0.0	0.0	0.0	0.0					
G164.0	0.0	0.0	0.0	0.0	0.0					
G165.0	0.0	0.0	0.0	0.0	0.0					
G166.0	0.0	0.0	0.0	0.0	0.0					
G167.0	0.0	0.0	0.0	0.0	0.0					
G168.0	0.0	0.0	0.0	0.0	0.0					
G169.0	0.0	0.0	0.0	0.0	0.0					
G170.0	0.0	0.0	0.0	0.0	0.0					
G171.0	0.0	0.0	0.0	0.0	0.0					
G172.0	0.0	0.0	0.0	0.0	0.0					
G173.0	0.0	0.0	0.0	0.0	0.0					
G174.0	0.0	0.0	0.0	0.0	0.0					
G175.0	0.0	0.0	0.0	0.0	0.0					
G176.0	0.0	0.0	0.0	0.0	0.0					
G177.0	0.0	0.0	0.0	0.0	0.0					
G178.0	0.0	0.0	0.0	0.0	0.0					
G179.0	0.0	0.0	0.0	0.0	0.0					
G180.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°):0.0-360.0: 90.0
 测试单位:
 测试类型: TYPE C
 环境温度:
 测试员:

Gamma 平面 (°):0.0-180.0:1.0
 测试设备: GPM-1600
 测试距离: 8.650 m
 环境湿度:
 核 验: