

报告编号:

测试时间: 2018-12-31 14:48

## 产品特征

灯具制造厂商:

灯具型号: TH106006-45d

光源个数: 1

电流: 0.054 A

功率因数: 0.547

光源种类: LED

电压: 221.5 V

功率: 6.60 W

## 光度结果

灯具CIE分类: 直接型

灯具光通量: 346 lm

下射光通量比: 100%

水平扩散角 (25%, 50%, 75%, 100%): H50. 1, H36. 8, H24. 2, H0

垂直扩散角 (25%, 50%, 75%, 100%): V49. 7, V36. 5, V24. 2, V1

灯具光效等级 (LER): 52

峰值光强: 823.61 cd

额定光通量: 346.0 lm

灯具效率: 100%

上射光通量比: 0%


中心光强: 822.65 cd

峰值光强位置: H90 V1

灯具实物照片



配光曲线

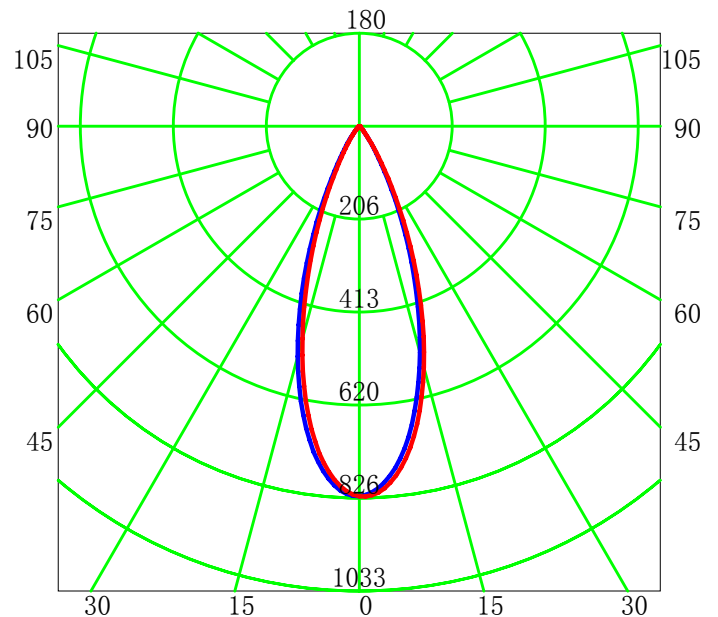

平均光束角 (50%): 36.7° 单位: cd

— C0-C180 — C90-C270

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600



测试距离: 8.167 m

环境湿度:

核 验:



配光曲线

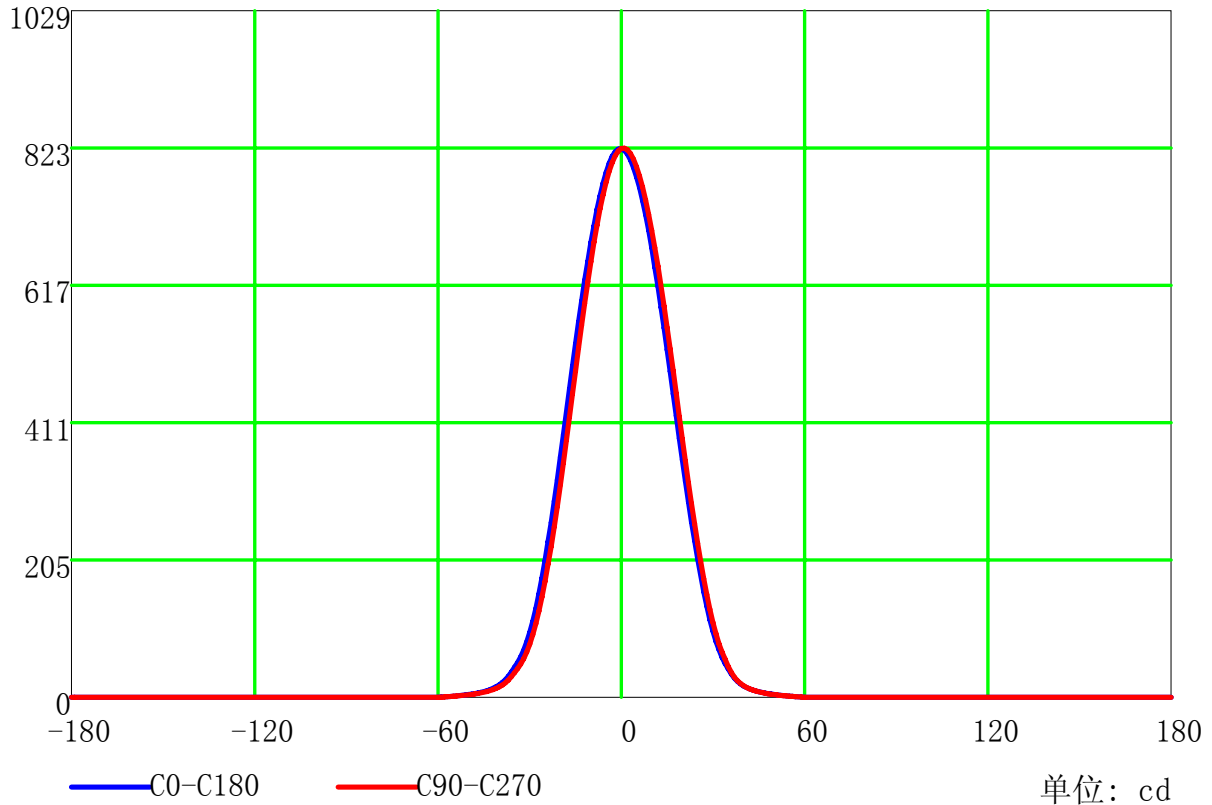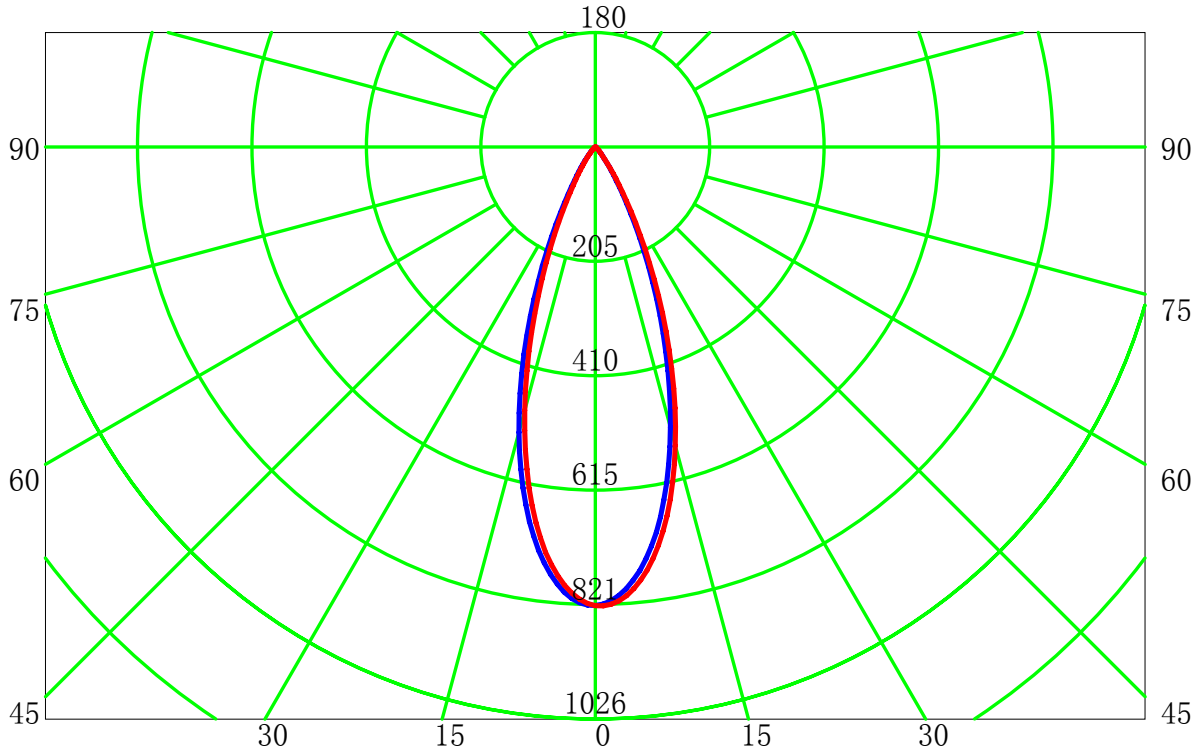


C 平面 (°):0.0-360.0: 90.0  
 测试单位:  
 测试类型: TYPE C  
 环境温度:  
 测试员:

Gamma 平面 (°):0.0-180.0:1.0  
 测试设备: GPM-1600  
 测试距离: 8.167 m  
 环境湿度:  
 核 验:



配光曲线(cd/klm)

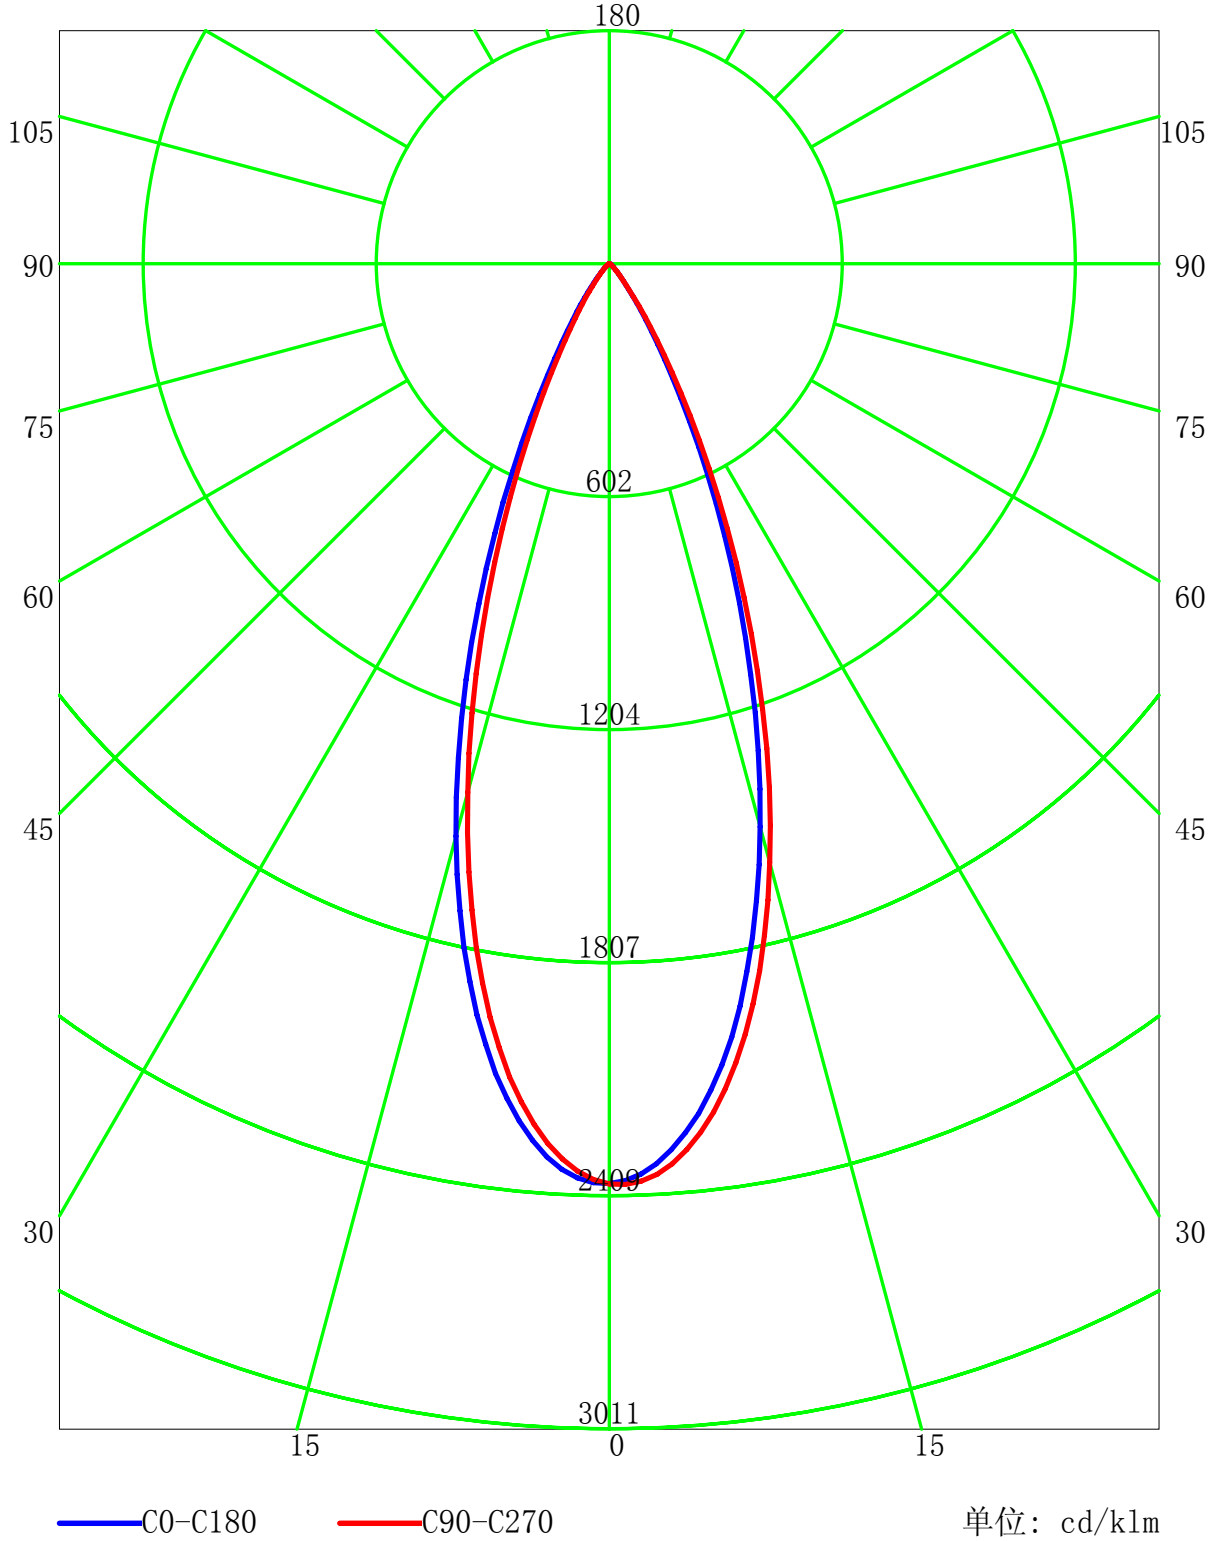

C 平面 (°): 0.0-360.0: 90.0  
 测试单位:  
 测试类型: TYPE C  
 环境温度:  
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0  
 测试设备: GPM-1600  
 测试距离: 8.167 m  
 环境湿度:  
 核 验:




### 室内灯具利用系数表

|      |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|------|----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RC   | 0.8      | 0.8 | 0.8 | 0.8 | 0.7 | 0.7 | 0.7 | 0.7 | 0.5 | 0.5 | 0.5 | 0.3 | 0.3 | 0.3 | 0.1 | 0.1 | 0.1 | 0   |
| RW   | 0.7      | 0.5 | 0.3 | 0.1 | 0.7 | 0.5 | 0.3 | 0.1 | 0.5 | 0.3 | 0.1 | 0.5 | 0.3 | 0.1 | 0.5 | 0.3 | 0.1 | 0   |
| RCCR | RF = 0.2 |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 0    | 119      | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1    | 114      | 112 | 110 | 108 | 112 | 110 | 108 | 106 | 106 | 104 | 103 | 102 | 101 | 100 | 99  | 98  | 97  | 95  |
| 2    | 110      | 106 | 102 | 100 | 108 | 104 | 101 | 98  | 101 | 98  | 96  | 98  | 96  | 94  | 95  | 94  | 92  | 91  |
| 3    | 106      | 100 | 96  | 93  | 104 | 99  | 95  | 92  | 96  | 93  | 91  | 94  | 91  | 89  | 92  | 90  | 88  | 86  |
| 4    | 101      | 95  | 91  | 87  | 100 | 94  | 90  | 87  | 92  | 88  | 86  | 90  | 87  | 85  | 88  | 86  | 84  | 82  |
| 5    | 98       | 91  | 86  | 82  | 96  | 90  | 85  | 82  | 88  | 84  | 81  | 87  | 83  | 81  | 85  | 82  | 80  | 79  |
| 6    | 94       | 87  | 82  | 78  | 93  | 86  | 81  | 78  | 84  | 80  | 77  | 83  | 80  | 77  | 82  | 79  | 76  | 75  |
| 7    | 90       | 83  | 78  | 74  | 89  | 82  | 77  | 74  | 81  | 77  | 74  | 80  | 76  | 73  | 79  | 76  | 73  | 72  |
| 8    | 87       | 79  | 74  | 71  | 86  | 79  | 74  | 71  | 78  | 74  | 71  | 77  | 73  | 70  | 76  | 73  | 70  | 69  |
| 9    | 84       | 76  | 71  | 68  | 83  | 76  | 71  | 68  | 75  | 71  | 68  | 74  | 70  | 67  | 73  | 70  | 67  | 66  |
| 10   | 81       | 73  | 68  | 65  | 80  | 73  | 68  | 65  | 72  | 68  | 65  | 71  | 67  | 65  | 71  | 67  | 65  | 64  |

最大允许安装距离高度比(横向): 0.60  
 最大允许安装距离高度比(纵向): 0.60  
 最大允许安装距离高度比(对角): 0.60

### 灯具概算曲线

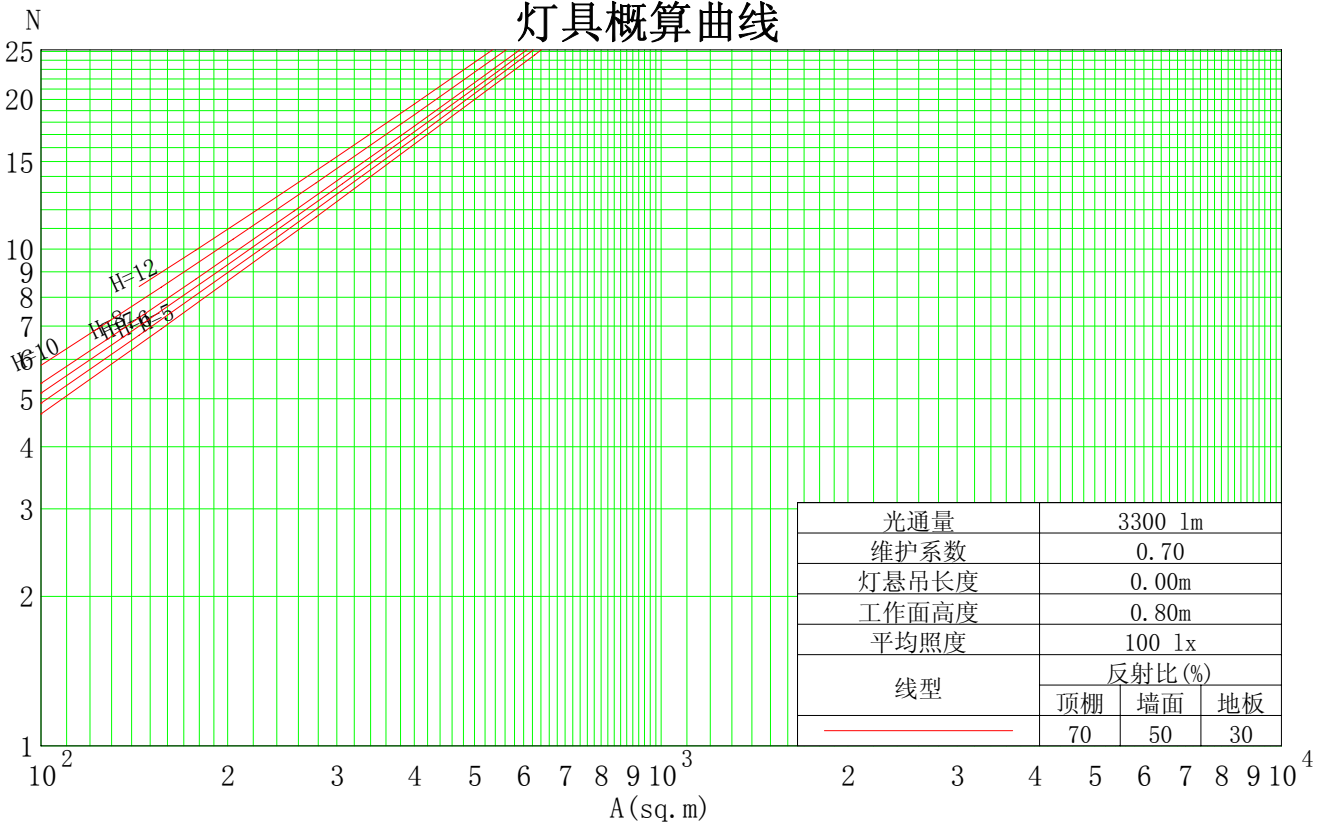


C 平面 (°): 0.0-360.0: 90.0  
 测试单位:  
 测试类型: TYPE C  
 环境温度:  
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0  
 测试设备: GPM-1600  
 测试距离: 8.167 m  
 环境湿度:  
 核 验:



### 水平面等照度曲线

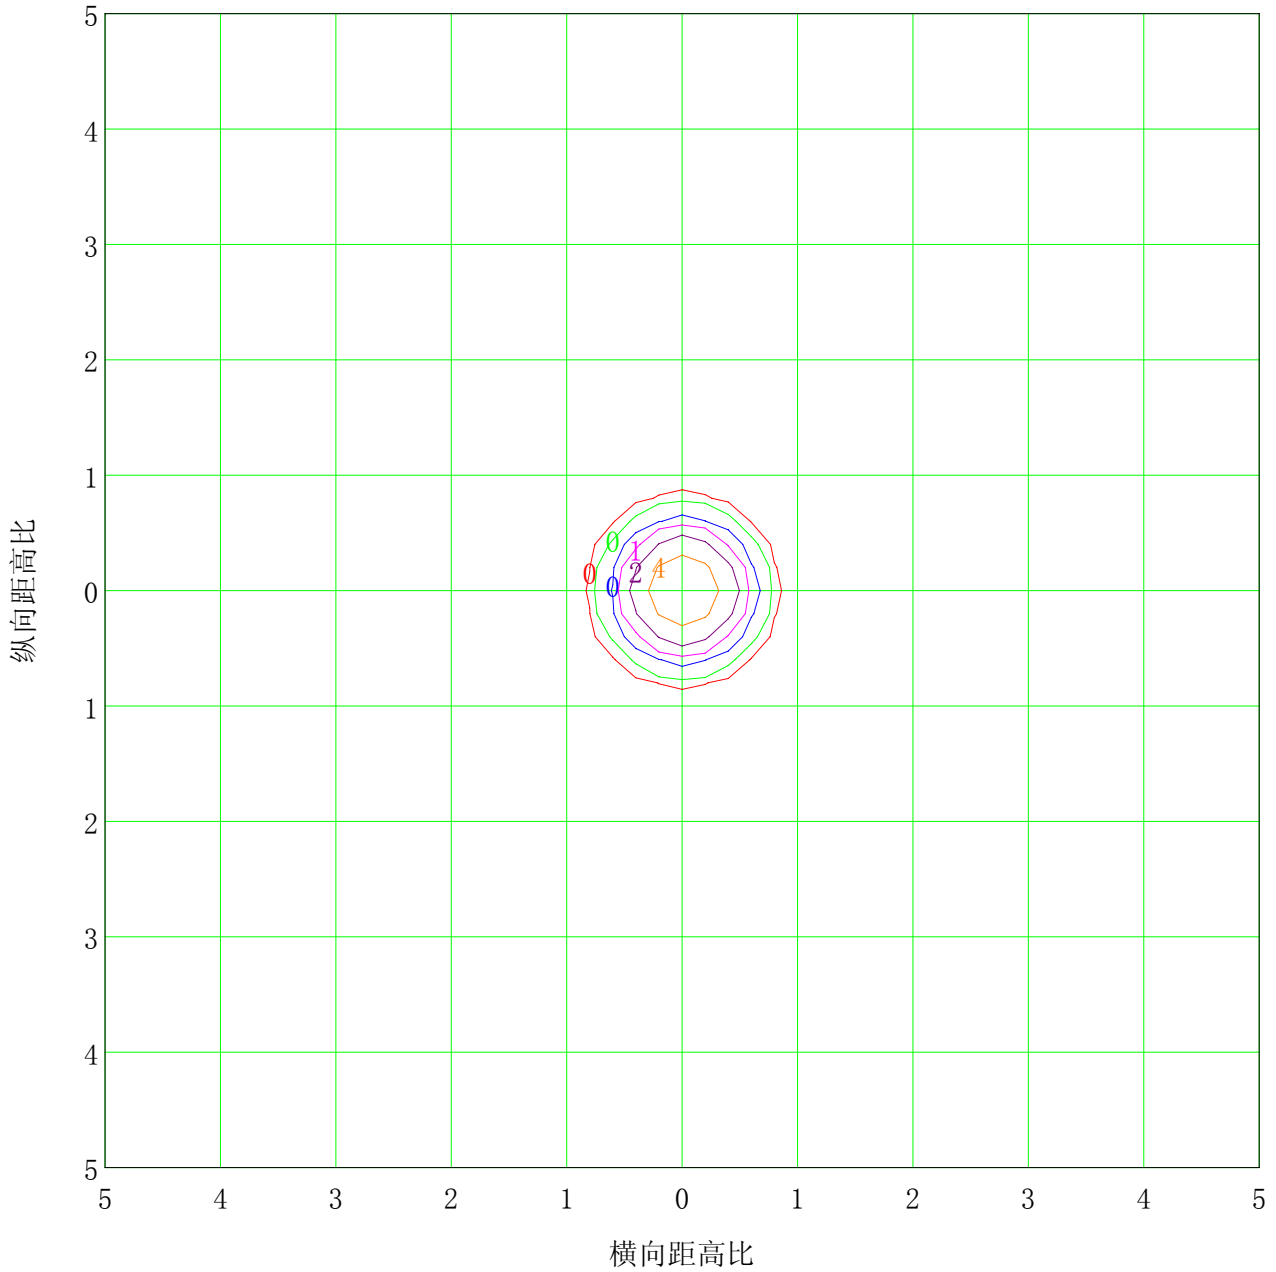

|           |      |           |                   |
|-----------|------|-----------|-------------------|
|           |      | 安装高度: 10m | 最大照度值(100%): 8 lx |
| — ( 1%):  | 0 lx | — ( 2%):  | 0 lx              |
| — ( 5%):  | 0 lx | — ( 10%): | 1 lx              |
| — ( 20%): | 2 lx | — ( 50%): | 4 lx              |
| — (100%): | 8 lx |           |                   |

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.167 m



环境湿度:

核 验:



### 亮度限制曲线

| 眩光评价价值 | 质量等级 | 使用照度 / lx |      |      |       |       |       |       |       |
|--------|------|-----------|------|------|-------|-------|-------|-------|-------|
|        |      | a         | b    | c    | d     | e     | f     | g     | h     |
| 1.15   | A    | 2000      | 1000 | 500  | <=300 |       |       |       |       |
| 1.50   | B    |           | 2000 | 1000 | 500   | <=300 |       |       |       |
| 1.85   | C    |           |      | 2000 | 1000  | 500   | <=300 |       |       |
| 2.20   | D    |           |      |      | 2000  | 1000  | 500   | <=300 |       |
| 2.55   | E    |           |      |      |       | 2000  | 1000  | 500   | <=300 |

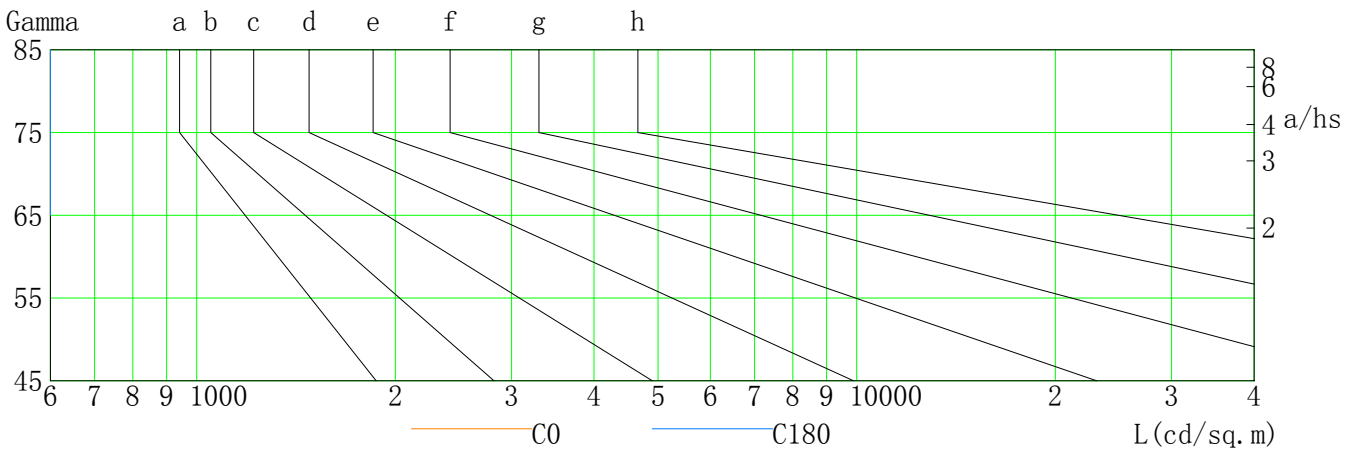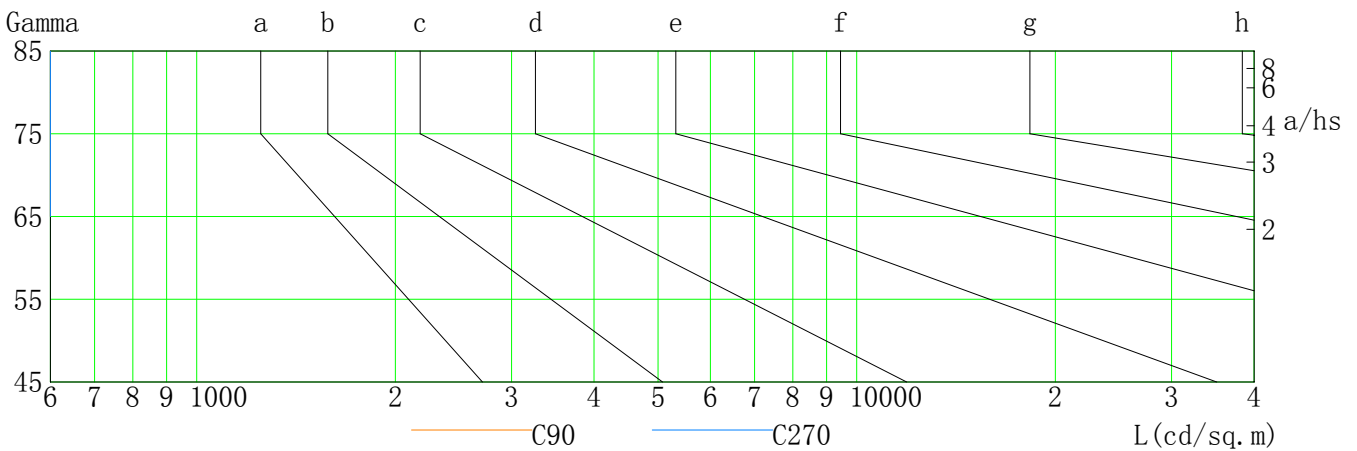

| L (cd/sq. m) | G45 | G50 | G55 | G60 | G65 | G70 | G75 | G80 | G85 |
|--------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| C0           | 8   | 4   | 2   | 0   | 0   | 0   | 0   | 0   | 0   |
| C90          | 8   | 4   | 2   | 0   | 0   | 0   | 0   | 0   | 0   |
| C180         | 9   | 4   | 2   | 0   | 0   | 0   | 0   | 0   | 0   |
| C270         | 8   | 4   | 2   | 0   | 0   | 0   | 0   | 0   | 0   |

C 平面 (°): 0.0-360.0: 90.0


测试单位:  
测试类型: TYPE C  
环境温度:  
测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600  
测试距离: 8.167 m  
环境湿度:  
核 验:



### 照度距离关系图

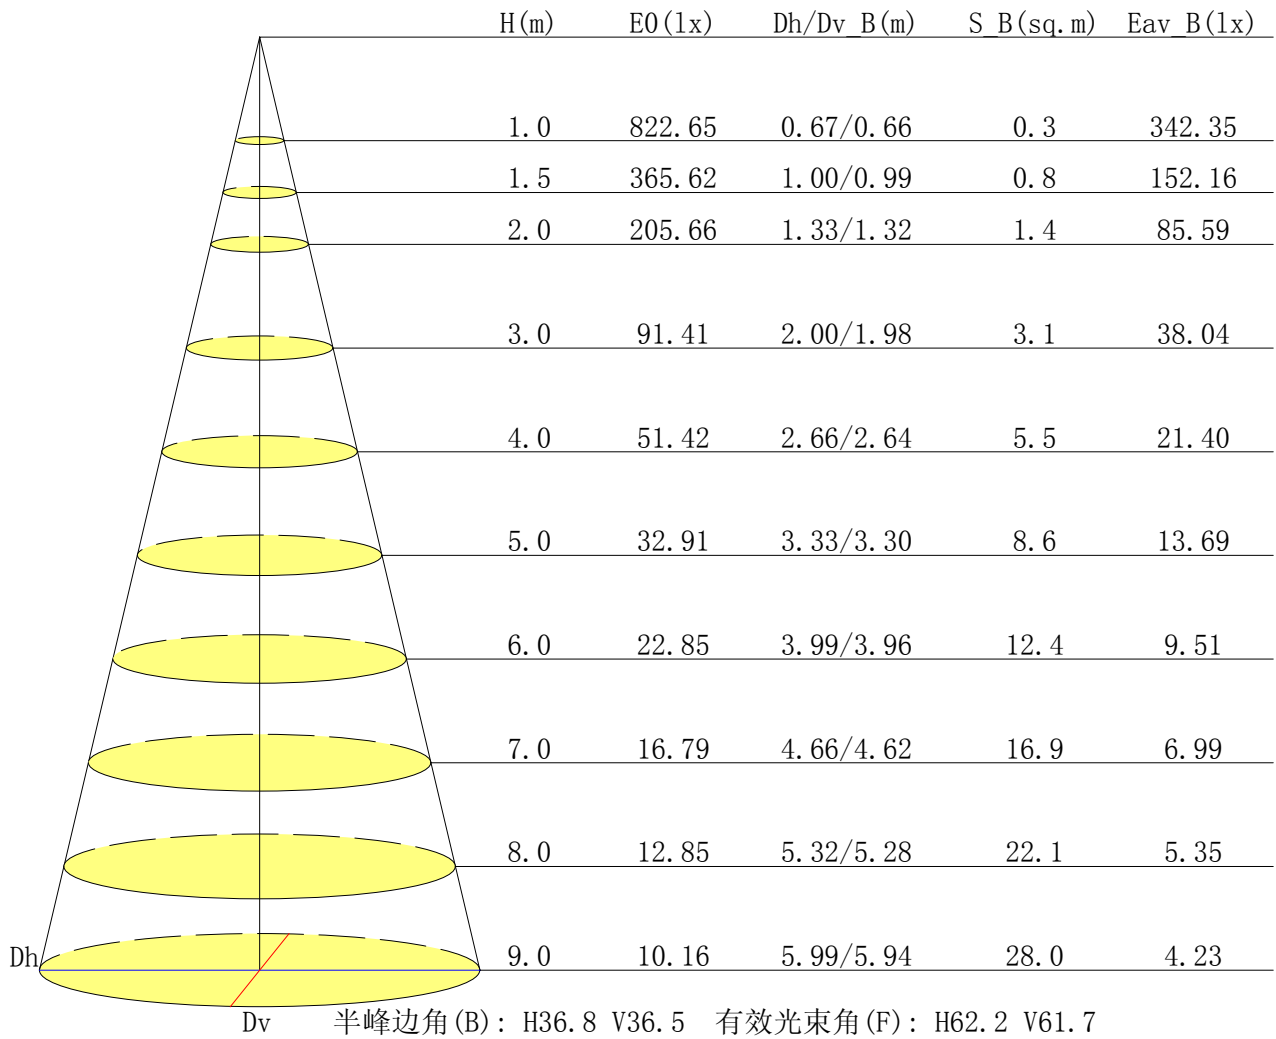


C 平面 (°): 0.0-360.0: 90.0  
 测试单位:  
 测试类型: TYPE C  
 环境温度:  
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0  
 测试设备: GPM-1600  
 测试距离: 8.167 m  
 环境湿度:  
 核 验:



### 垂直面等照度曲线

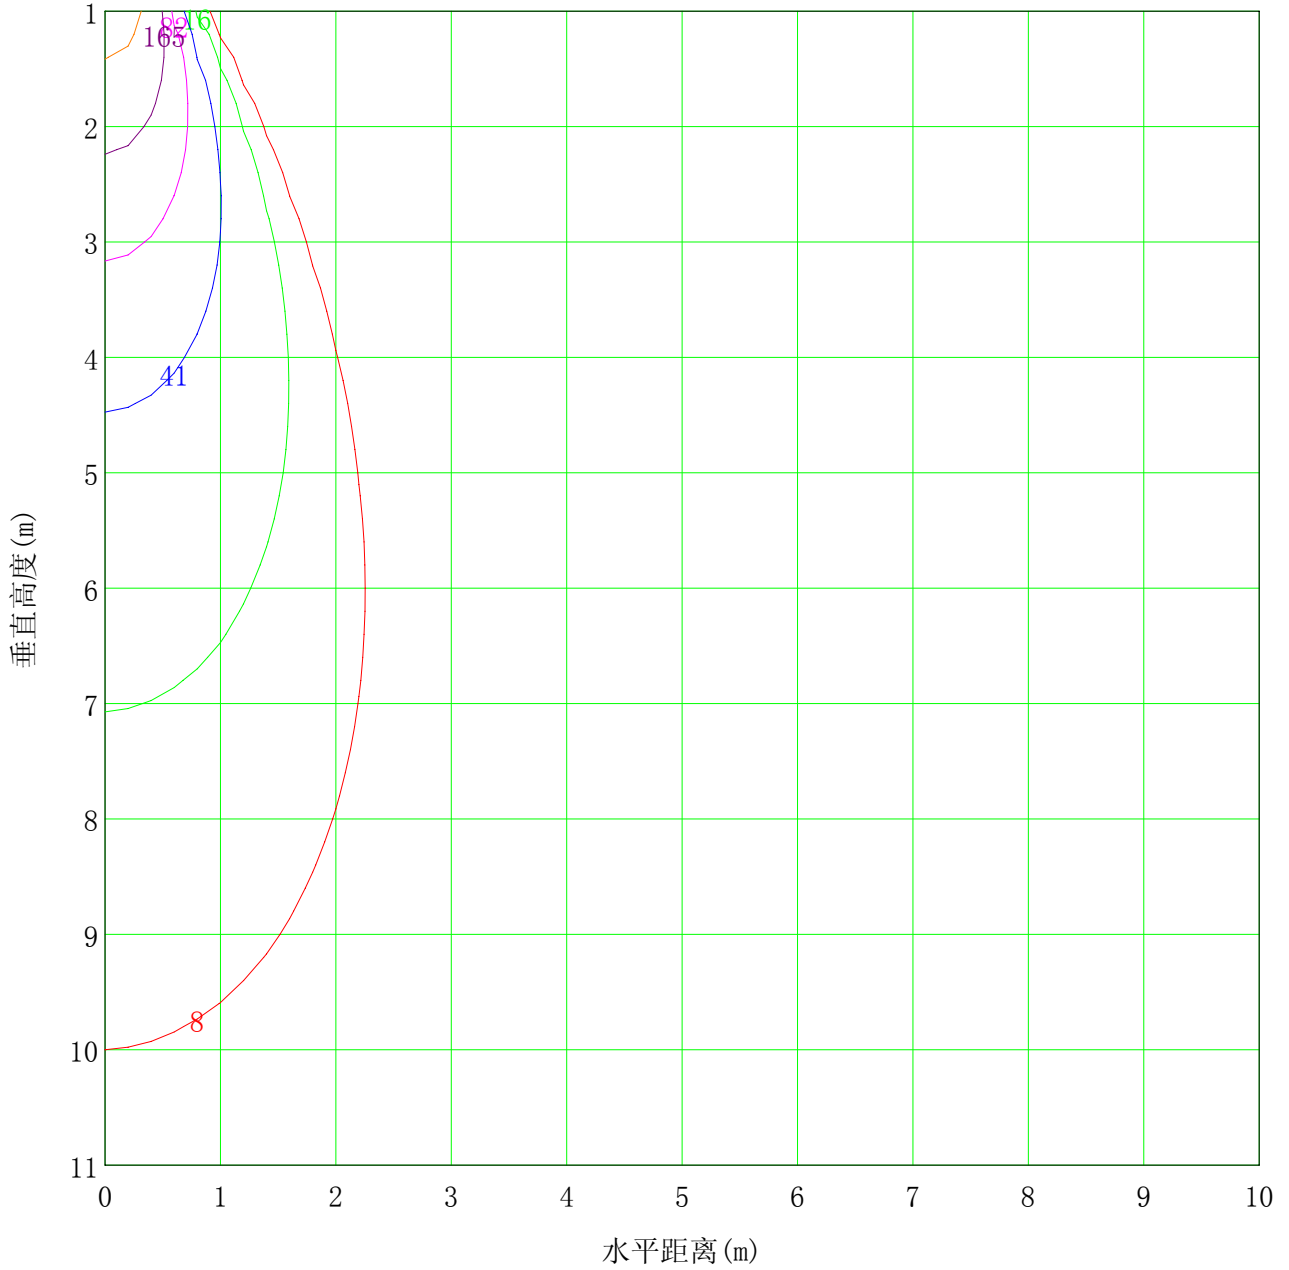

|                  |                 |            |
|------------------|-----------------|------------|
| 最低高度(米): 1m      | 最大高度(米): 11     | 最大照度值: 823 |
| — ( 1%): 8 lx    | — ( 2%): 16 lx  |            |
| — ( 5%): 41 lx   | — (10%): 82 lx  |            |
| — (20%): 165 lx  | — (50%): 411 lx |            |
| — (100%): 823 lx |                 |            |

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.167 m


环境湿度:

核 验:





### 灯具有效平均照度图

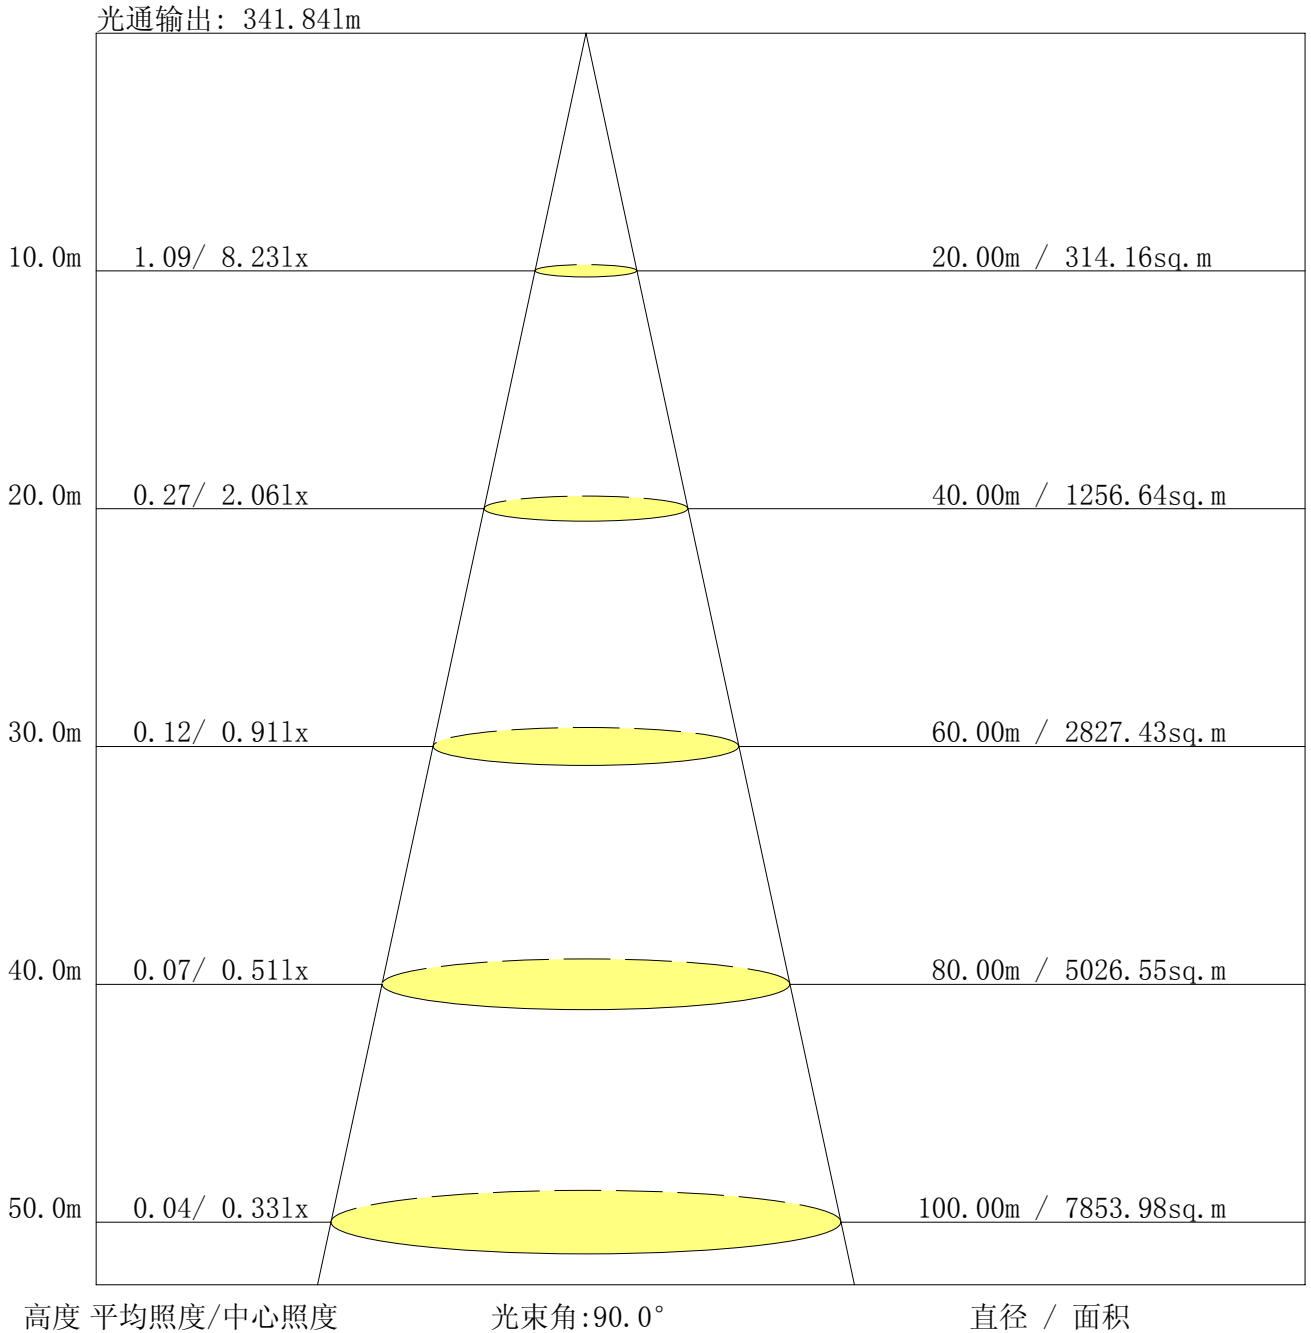

C 平面 (°): 0.0-360.0: 90.0  
 测试单位:  
 测试类型: TYPE C  
 环境温度:  
 测试员:

Gamma 平面 (°): 0.0-180.0: 1.0  
 测试设备: GPM-1600  
 测试距离: 8.167 m  
 环境湿度:  
 核 验:



## 光强分布数据表格

单位: cd

| G\C   | C0.0  | C90.0 | C180.0 | C270.0 | C360.0 |  |  |  |  |  |
|-------|-------|-------|--------|--------|--------|--|--|--|--|--|
| G0.0  | 822.7 | 823.0 | 822.7  | 823.0  | 822.7  |  |  |  |  |  |
| G1.0  | 820.2 | 823.6 | 822.1  | 819.2  | 820.2  |  |  |  |  |  |
| G2.0  | 814.7 | 821.1 | 818.2  | 812.2  | 814.7  |  |  |  |  |  |
| G3.0  | 806.1 | 815.7 | 811.2  | 801.9  | 806.1  |  |  |  |  |  |
| G4.0  | 794.5 | 807.0 | 800.8  | 788.9  | 794.5  |  |  |  |  |  |
| G5.0  | 780.3 | 795.4 | 787.1  | 772.6  | 780.3  |  |  |  |  |  |
| G6.0  | 764.4 | 781.3 | 771.0  | 753.7  | 764.4  |  |  |  |  |  |
| G7.0  | 744.8 | 764.6 | 752.0  | 732.9  | 744.8  |  |  |  |  |  |
| G8.0  | 723.7 | 745.3 | 731.5  | 707.9  | 723.7  |  |  |  |  |  |
| G9.0  | 700.3 | 723.7 | 706.9  | 682.3  | 700.3  |  |  |  |  |  |
| G10.0 | 674.2 | 700.0 | 682.4  | 653.3  | 674.2  |  |  |  |  |  |
| G11.0 | 645.0 | 674.3 | 654.0  | 623.4  | 645.0  |  |  |  |  |  |
| G12.0 | 616.1 | 646.7 | 625.5  | 591.0  | 616.1  |  |  |  |  |  |
| G13.0 | 584.8 | 616.6 | 594.0  | 558.4  | 584.8  |  |  |  |  |  |
| G14.0 | 554.0 | 586.6 | 563.0  | 524.5  | 554.0  |  |  |  |  |  |
| G15.0 | 521.4 | 554.5 | 530.2  | 489.4  | 521.4  |  |  |  |  |  |
| G16.0 | 488.9 | 522.7 | 496.6  | 455.5  | 488.9  |  |  |  |  |  |
| G17.0 | 455.5 | 490.0 | 462.1  | 420.3  | 455.5  |  |  |  |  |  |
| G18.0 | 422.5 | 455.9 | 427.8  | 385.7  | 422.5  |  |  |  |  |  |
| G19.0 | 388.6 | 421.1 | 393.5  | 351.6  | 388.6  |  |  |  |  |  |
| G20.0 | 356.4 | 387.5 | 360.1  | 318.1  | 356.4  |  |  |  |  |  |
| G21.0 | 324.8 | 354.6 | 325.9  | 286.0  | 324.8  |  |  |  |  |  |
| G22.0 | 293.9 | 322.0 | 294.0  | 255.8  | 293.9  |  |  |  |  |  |
| G23.0 | 263.5 | 290.6 | 262.1  | 226.4  | 263.5  |  |  |  |  |  |
| G24.0 | 235.1 | 260.0 | 233.7  | 199.6  | 235.1  |  |  |  |  |  |
| G25.0 | 207.6 | 230.8 | 204.9  | 173.5  | 207.6  |  |  |  |  |  |
| G26.0 | 182.9 | 203.7 | 179.0  | 150.4  | 182.9  |  |  |  |  |  |
| G27.0 | 158.2 | 177.6 | 155.1  | 129.3  | 158.2  |  |  |  |  |  |
| G28.0 | 136.9 | 154.2 | 133.0  | 110.6  | 136.9  |  |  |  |  |  |
| G29.0 | 116.4 | 132.1 | 114.2  | 94.1   | 116.4  |  |  |  |  |  |
| G30.0 | 99.4  | 112.3 | 97.5   | 79.8   | 99.4   |  |  |  |  |  |
| G31.0 | 84.2  | 95.7  | 83.1   | 68.1   | 84.2   |  |  |  |  |  |
| G32.0 | 71.5  | 80.3  | 70.8   | 58.0   | 71.5   |  |  |  |  |  |
| G33.0 | 60.2  | 68.0  | 60.7   | 49.8   | 60.2   |  |  |  |  |  |
| G34.0 | 51.0  | 57.5  | 52.3   | 43.0   | 51.0   |  |  |  |  |  |
| G35.0 | 43.1  | 46.7  | 45.3   | 37.0   | 43.1   |  |  |  |  |  |
| G36.0 | 35.3  | 37.5  | 37.9   | 31.1   | 35.3   |  |  |  |  |  |

C 平面 (°):0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°):0.0-180.0:1.0

测试设备: GPM-1600

测试距离: 8.167 m

环境湿度:

核 验:



光强分布数据表格 (续 1)

单位: cd

| G\C   | C0.0 | C90.0 | C180.0 | C270.0 | C360.0 |  |  |  |  |  |
|-------|------|-------|--------|--------|--------|--|--|--|--|--|
| G37.0 | 28.9 | 30.4  | 31.5   | 25.9   | 28.9   |  |  |  |  |  |
| G38.0 | 24.1 | 25.0  | 26.3   | 21.7   | 24.1   |  |  |  |  |  |
| G39.0 | 20.3 | 20.9  | 22.1   | 18.3   | 20.3   |  |  |  |  |  |
| G40.0 | 17.2 | 17.7  | 18.7   | 15.6   | 17.2   |  |  |  |  |  |
| G41.0 | 14.8 | 15.1  | 15.9   | 13.4   | 14.8   |  |  |  |  |  |
| G42.0 | 12.8 | 12.9  | 13.7   | 11.6   | 12.8   |  |  |  |  |  |
| G43.0 | 11.1 | 11.1  | 11.6   | 10.1   | 11.1   |  |  |  |  |  |
| G44.0 | 9.7  | 9.6   | 10.0   | 8.8    | 9.7    |  |  |  |  |  |
| G45.0 | 8.4  | 8.4   | 8.6    | 7.7    | 8.4    |  |  |  |  |  |
| G46.0 | 7.4  | 7.3   | 7.5    | 6.7    | 7.4    |  |  |  |  |  |
| G47.0 | 6.5  | 6.3   | 6.6    | 5.9    | 6.5    |  |  |  |  |  |
| G48.0 | 5.7  | 5.5   | 5.7    | 5.2    | 5.7    |  |  |  |  |  |
| G49.0 | 5.1  | 4.8   | 5.0    | 4.5    | 5.1    |  |  |  |  |  |
| G50.0 | 4.4  | 4.2   | 4.3    | 3.9    | 4.4    |  |  |  |  |  |
| G51.0 | 3.8  | 3.6   | 3.7    | 3.4    | 3.8    |  |  |  |  |  |
| G52.0 | 3.3  | 3.1   | 3.2    | 2.9    | 3.3    |  |  |  |  |  |
| G53.0 | 2.8  | 2.6   | 2.7    | 2.5    | 2.8    |  |  |  |  |  |
| G54.0 | 2.3  | 2.2   | 2.3    | 2.1    | 2.3    |  |  |  |  |  |
| G55.0 | 1.9  | 1.8   | 1.8    | 1.7    | 1.9    |  |  |  |  |  |
| G56.0 | 1.5  | 1.5   | 1.4    | 1.3    | 1.5    |  |  |  |  |  |
| G57.0 | 1.2  | 1.1   | 1.1    | 1.0    | 1.2    |  |  |  |  |  |
| G58.0 | 0.8  | 0.8   | 0.8    | 0.7    | 0.8    |  |  |  |  |  |
| G59.0 | 0.5  | 0.6   | 0.5    | 0.3    | 0.5    |  |  |  |  |  |
| G60.0 | 0.2  | 0.2   | 0.2    | 0.1    | 0.2    |  |  |  |  |  |
| G61.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G62.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G63.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G64.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G65.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G66.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G67.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G68.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G69.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G70.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G71.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G72.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G73.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |

C 平面 (°):0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°):0.0-180.0:1.0

测试设备: GPM-1600

测试距离: 8.167 m

环境湿度:

核 验:



光强分布数据表格 (续 2)

单位: cd

| G\C    | C0.0 | C90.0 | C180.0 | C270.0 | C360.0 |  |  |  |  |  |
|--------|------|-------|--------|--------|--------|--|--|--|--|--|
| G74.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G75.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G76.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G77.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G78.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G79.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G80.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G81.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G82.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G83.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G84.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G85.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G86.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G87.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G88.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G89.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G90.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G91.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G92.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G93.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G94.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G95.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G96.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G97.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G98.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G99.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G100.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G101.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G102.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G103.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G104.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G105.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G106.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G107.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G108.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G109.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G110.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |

C 平面 (°):0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°):0.0-180.0:1.0

测试设备: GPM-1600

测试距离: 8.167 m

环境湿度:

核 验:



光强分布数据表格 (续 3)

单位: cd

| G\C    | C0.0 | C90.0 | C180.0 | C270.0 | C360.0 |  |  |  |  |  |
|--------|------|-------|--------|--------|--------|--|--|--|--|--|
| G111.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G112.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G113.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G114.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G115.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G116.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G117.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G118.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G119.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G120.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G121.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G122.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G123.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G124.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G125.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G126.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G127.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G128.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G129.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G130.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G131.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G132.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G133.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G134.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G135.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G136.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G137.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G138.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G139.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G140.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G141.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G142.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G143.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G144.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G145.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G146.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G147.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |

C 平面 (°):0.0-360.0: 90.0  
 测试单位:  
 测试类型: TYPE C  
 环境温度:  
 测试员:

Gamma 平面 (°):0.0-180.0:1.0  
 测试设备: GPM-1600  
 测试距离: 8.167 m  
 环境湿度:  
 核 验:



光强分布数据表格 (续 4)

单位: cd

| G\C    | C0.0 | C90.0 | C180.0 | C270.0 | C360.0 |  |  |  |  |  |
|--------|------|-------|--------|--------|--------|--|--|--|--|--|
| G148.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G149.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G150.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G151.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G152.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G153.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G154.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G155.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G156.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G157.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G158.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G159.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G160.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G161.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G162.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G163.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G164.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G165.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G166.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G167.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G168.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G169.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G170.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G171.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G172.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G173.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G174.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G175.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G176.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G177.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G178.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G179.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G180.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
|        |      |       |        |        |        |  |  |  |  |  |
|        |      |       |        |        |        |  |  |  |  |  |
|        |      |       |        |        |        |  |  |  |  |  |
|        |      |       |        |        |        |  |  |  |  |  |

C 平面 (°):0.0-360.0: 90.0  
 测试单位:  
 测试类型: TYPE C  
 环境温度:  
 测试员:

Gamma 平面 (°):0.0-180.0:1.0  
 测试设备: GPM-1600  
 测试距离: 8.167 m  
 环境湿度:  
 核 验: