

报告编号:

测试时间: 2019-06-03 09:40

## 产品特征

灯具制造厂商:

灯具型号: XQ613040.01W-D24

电压: 221.4 V

功率: 40.10 W

光源个数: 1

电流: 0.190 A

功率因数: 0.954

## 光度结果

灯具CIE分类: 直接型

灯具光通量: 2047.1 lm

下射光通量比: 100%

额定光通量: 2047.1 lm

灯具效率: 100%

上射光通量比: 0%

水平扩散角 (25%, 50%, 75%, 100%): H38.3, H27.5, H18.3, H3

垂直扩散角 (25%, 50%, 75%, 100%): V36.9, V26.7, V18, V4

灯具光效等级 (LER): 51

峰值光强: 8631.62 cd


中心光强: 8284.26 cd

峰值光强位置: H270 V4

灯具实物照片



配光曲线

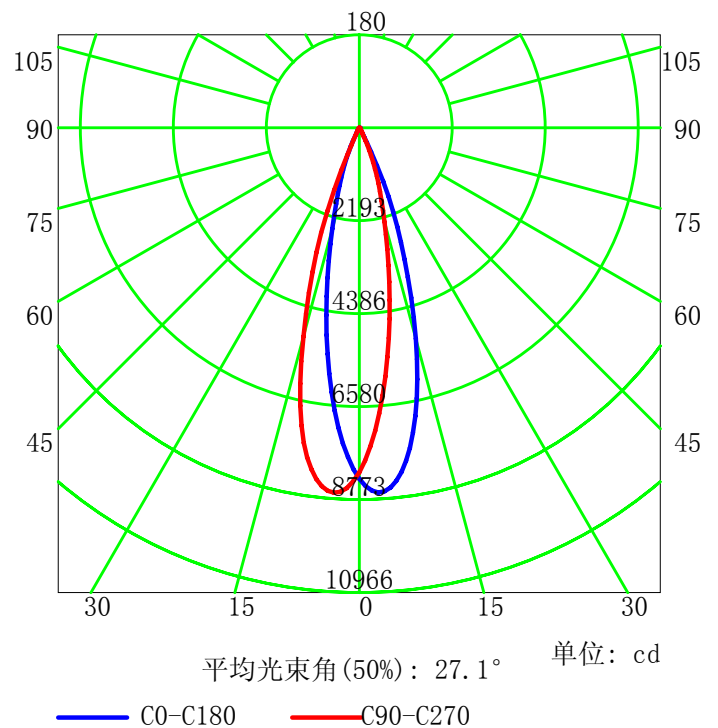

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

## 配光曲线

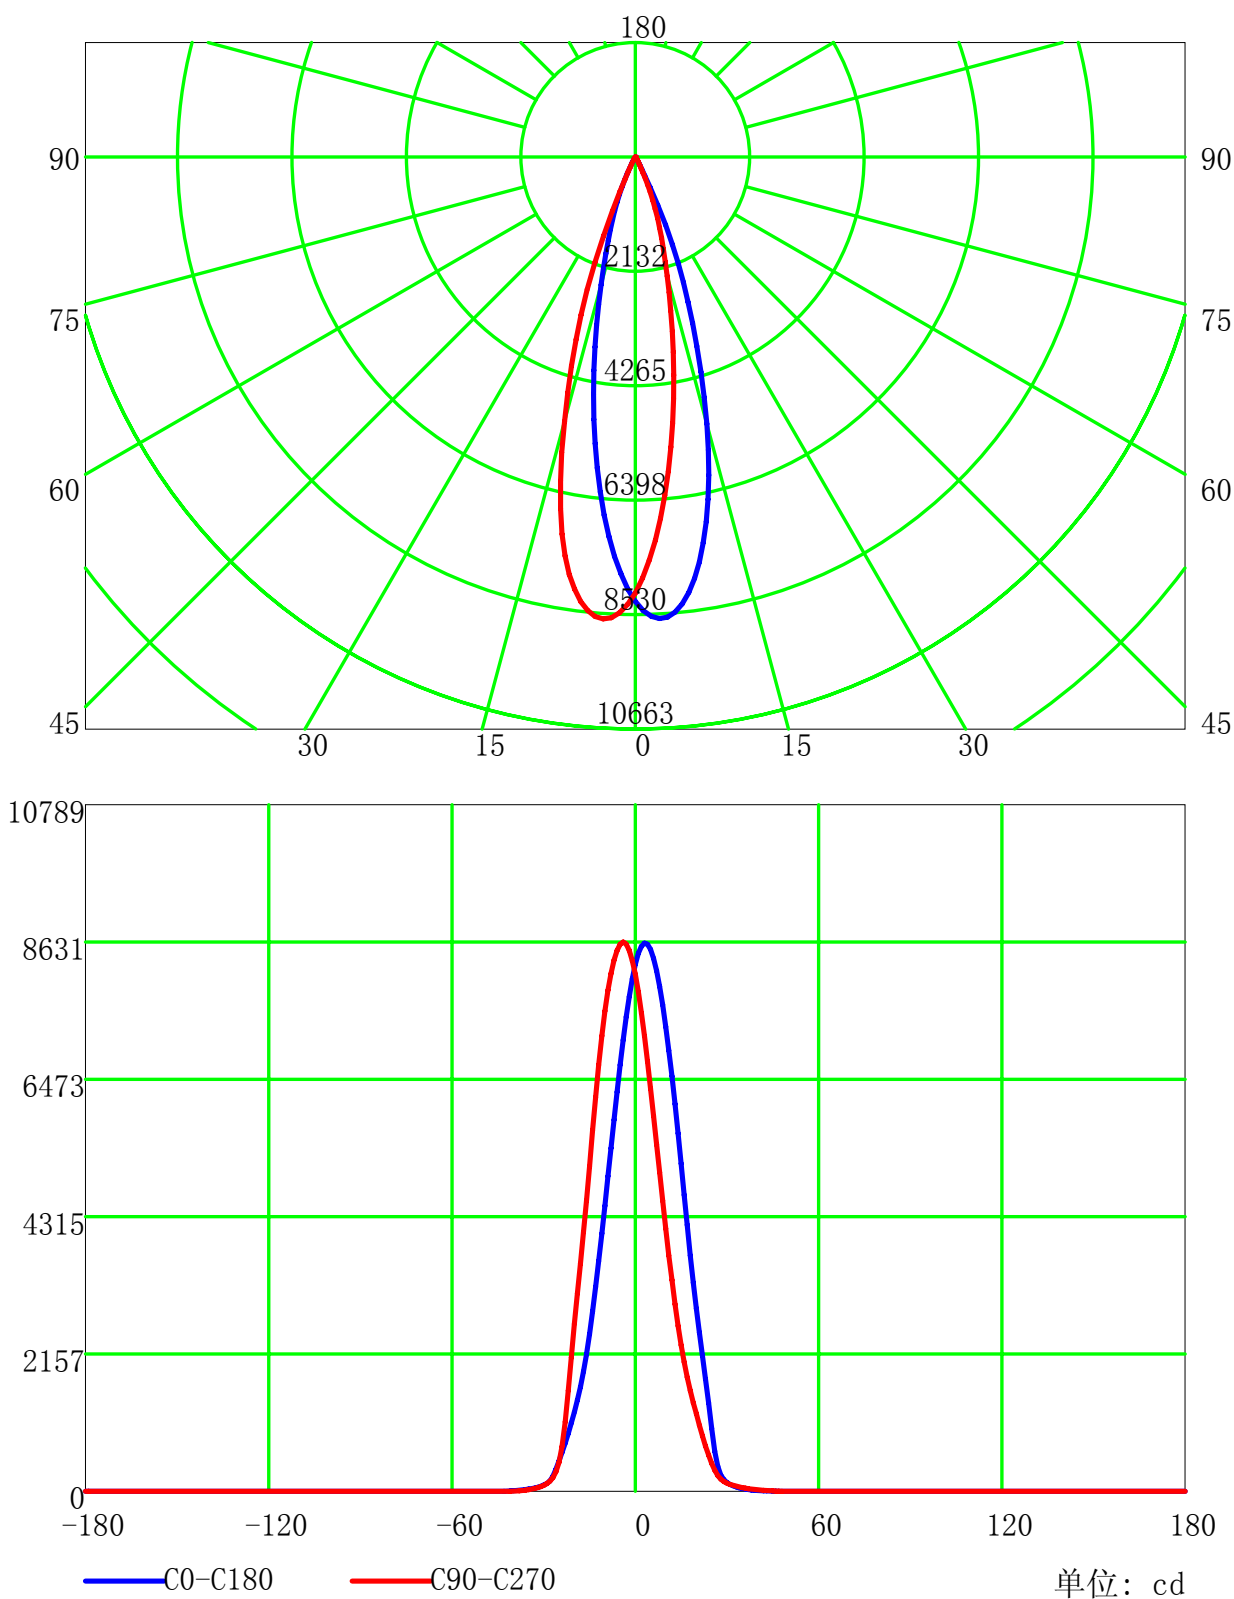

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

## 配光曲线(cd/klm)

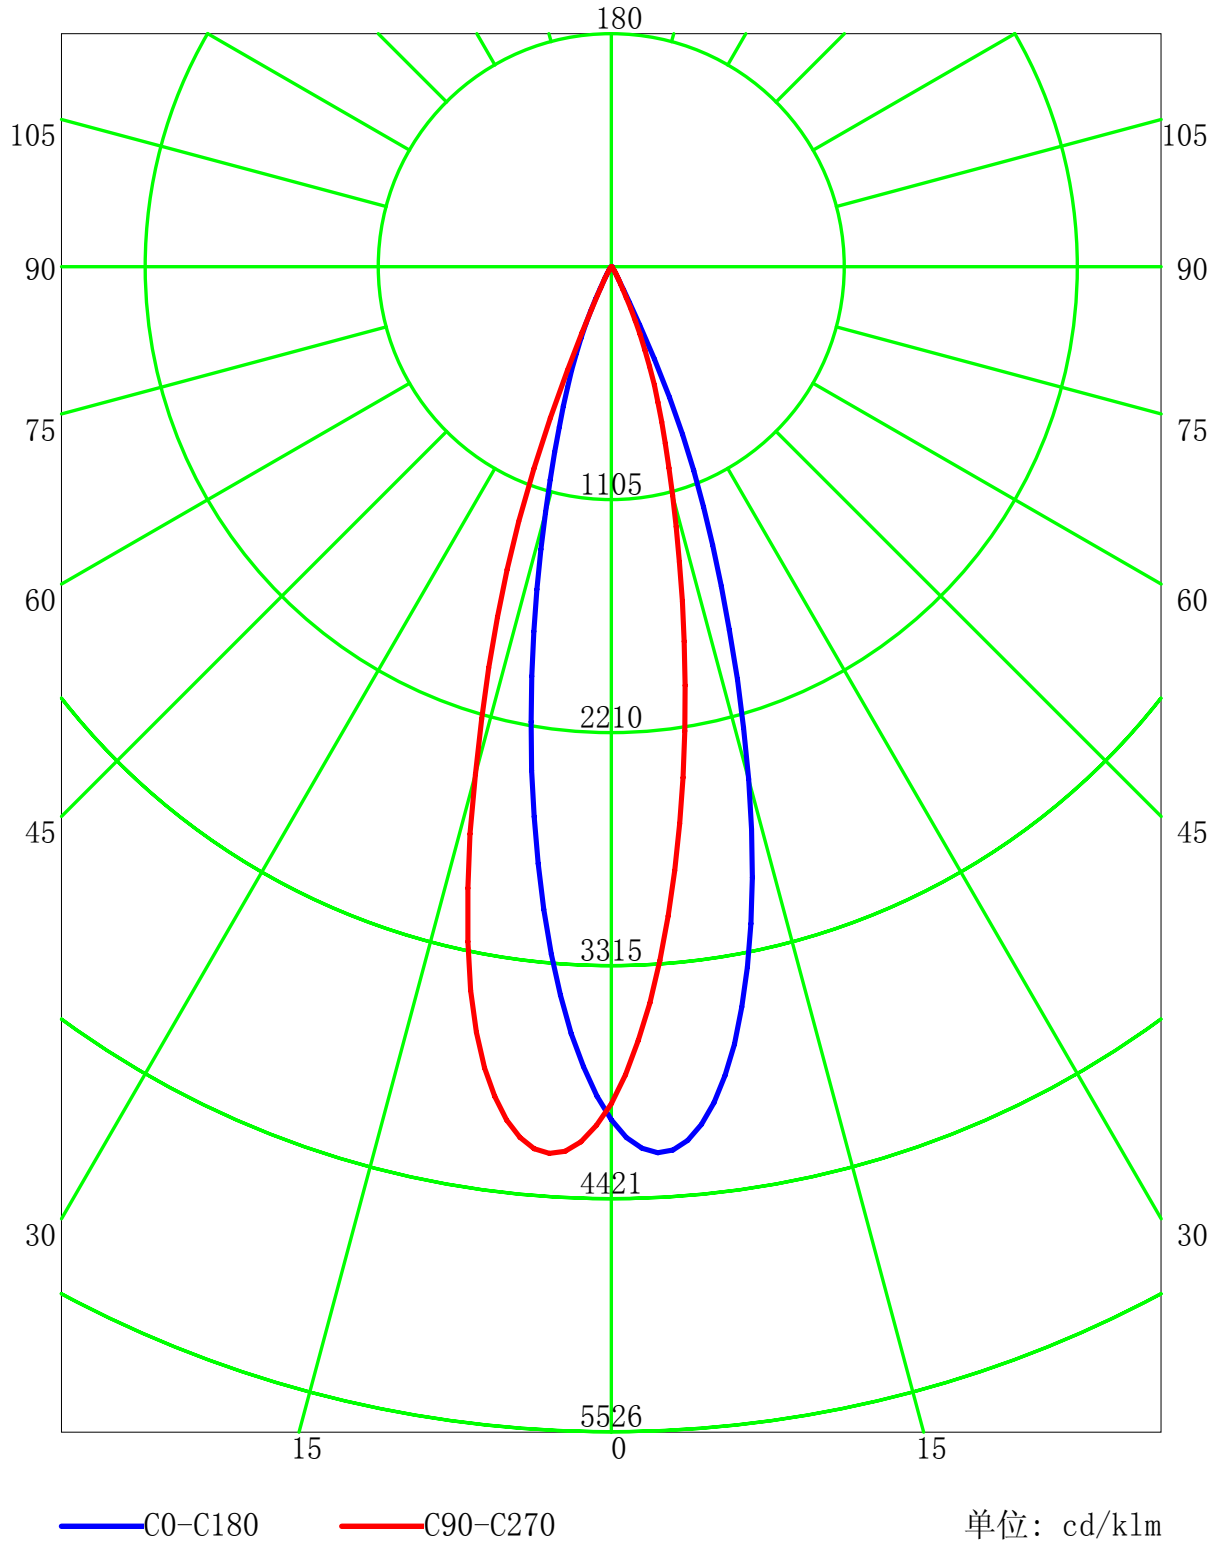

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

## 室内灯具利用系数表


|     |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----|----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RC  | 0.8      | 0.8 | 0.8 | 0.8 | 0.7 | 0.7 | 0.7 | 0.7 | 0.5 | 0.5 | 0.5 | 0.3 | 0.3 | 0.3 | 0.1 | 0.1 | 0.1 | 0   |
| RW  | 0.7      | 0.5 | 0.3 | 0.1 | 0.7 | 0.5 | 0.3 | 0.1 | 0.5 | 0.3 | 0.1 | 0.5 | 0.3 | 0.1 | 0.5 | 0.3 | 0.1 | 0   |
| RCR | RF = 0.2 |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 0   | 119      | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1   | 115      | 113 | 111 | 109 | 113 | 111 | 109 | 108 | 107 | 106 | 104 | 103 | 102 | 101 | 100 | 99  | 98  | 97  |
| 2   | 111      | 108 | 105 | 102 | 109 | 106 | 104 | 101 | 103 | 101 | 99  | 100 | 99  | 97  | 98  | 96  | 95  | 94  |
| 3   | 108      | 103 | 100 | 97  | 106 | 102 | 99  | 96  | 100 | 97  | 95  | 97  | 95  | 93  | 95  | 93  | 92  | 91  |
| 4   | 105      | 99  | 96  | 93  | 103 | 98  | 95  | 92  | 96  | 93  | 91  | 95  | 92  | 90  | 93  | 91  | 89  | 88  |
| 5   | 102      | 96  | 92  | 89  | 100 | 95  | 91  | 88  | 93  | 90  | 88  | 92  | 89  | 87  | 91  | 88  | 86  | 85  |
| 6   | 99       | 93  | 89  | 86  | 98  | 92  | 88  | 85  | 91  | 87  | 85  | 89  | 87  | 84  | 88  | 86  | 84  | 83  |
| 7   | 96       | 90  | 86  | 83  | 95  | 89  | 85  | 82  | 88  | 85  | 82  | 87  | 84  | 82  | 86  | 83  | 81  | 80  |
| 8   | 93       | 87  | 83  | 80  | 92  | 86  | 83  | 80  | 86  | 82  | 80  | 85  | 82  | 79  | 84  | 81  | 79  | 78  |
| 9   | 91       | 84  | 80  | 78  | 90  | 84  | 80  | 78  | 83  | 80  | 77  | 82  | 79  | 77  | 82  | 79  | 77  | 76  |
| 10  | 89       | 82  | 78  | 75  | 88  | 82  | 78  | 75  | 81  | 78  | 75  | 80  | 77  | 75  | 80  | 77  | 75  | 74  |

最大允许安装距离高度比(横向): 0.48

最大允许安装距离高度比(纵向): 0.48

最大允许安装距离高度比(对角): 0.48

## 灯具概算曲线

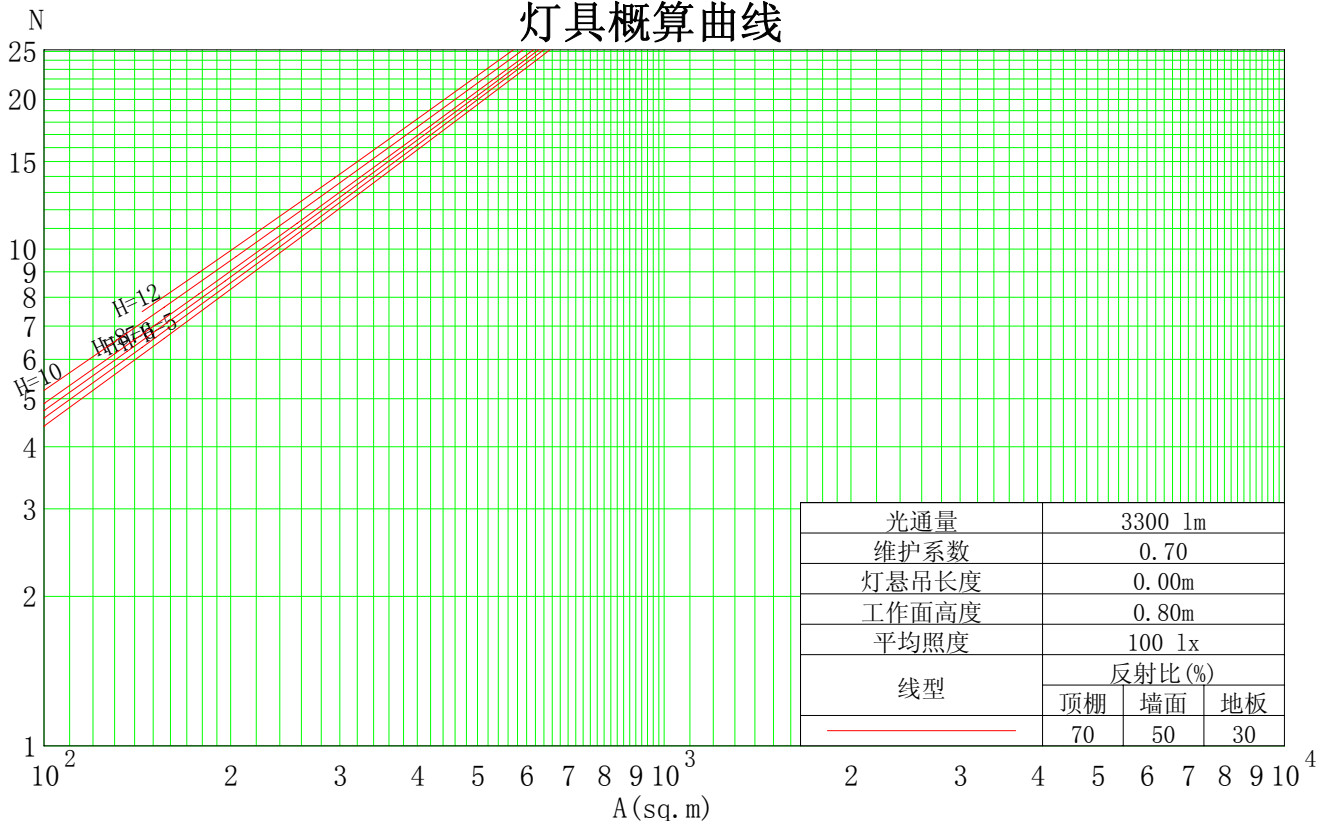

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

## 水平面等照度曲线

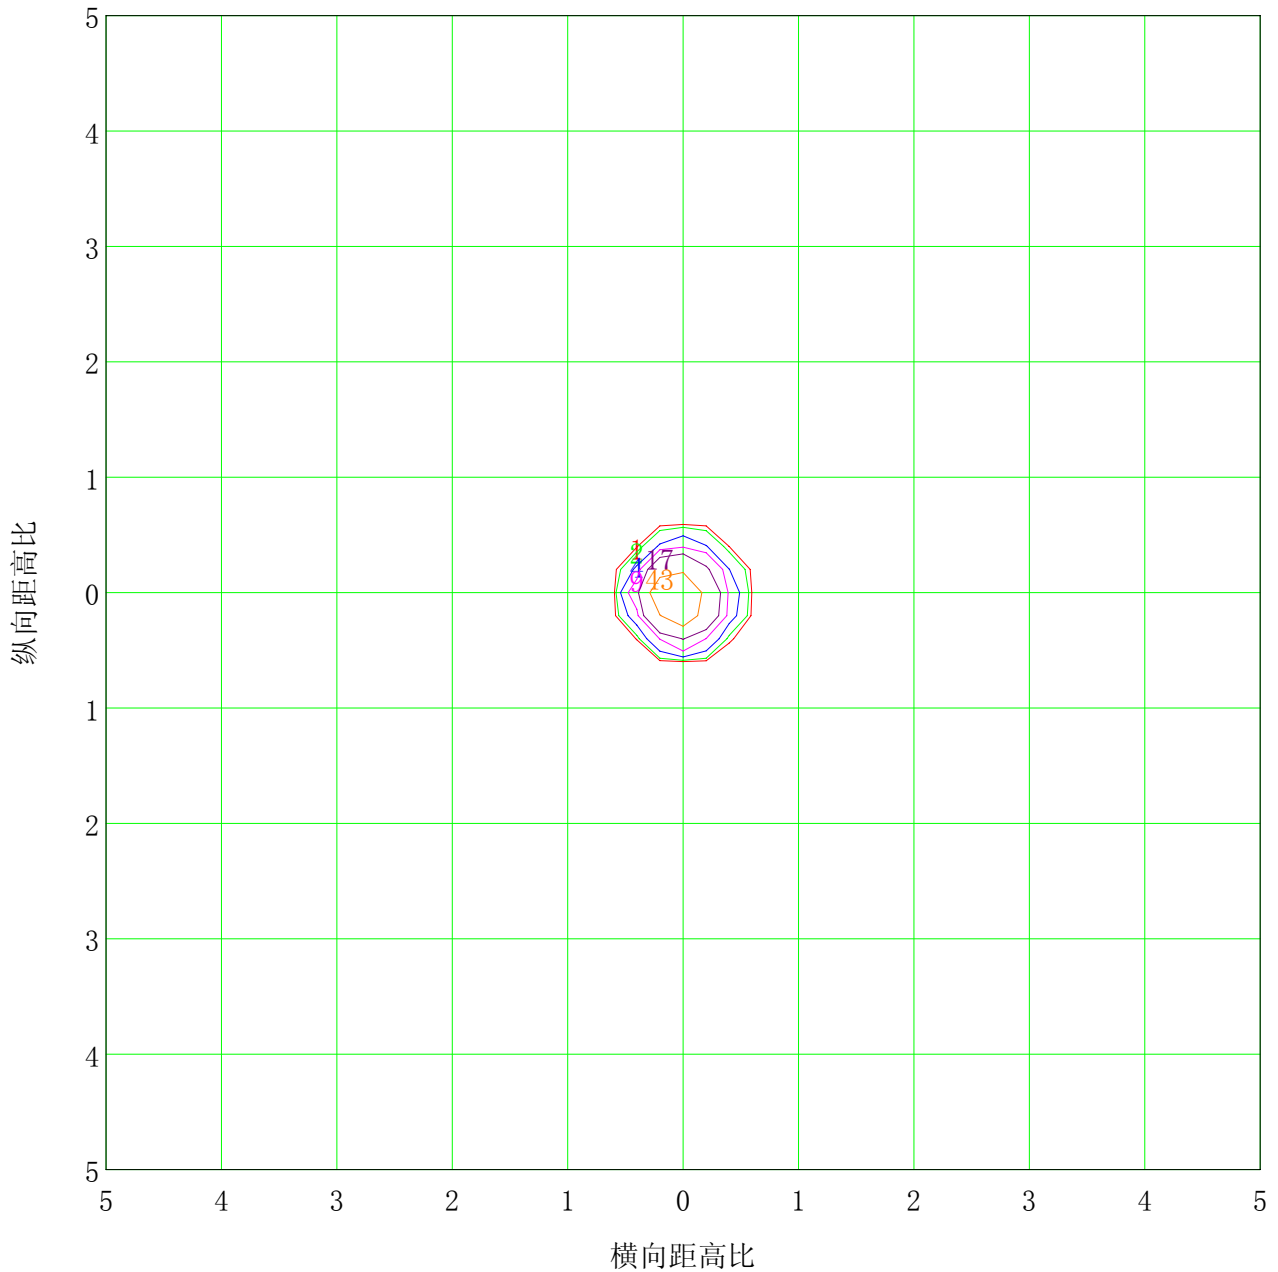

安装高度: 10m 最大照度值(100%): 86 lx

|         |       |         |       |
|---------|-------|---------|-------|
| ( 1%):  | 1 lx  | ( 2%):  | 2 lx  |
| ( 5%):  | 4 lx  | ( 10%): | 9 lx  |
| ( 20%): | 17 lx | ( 50%): | 43 lx |
| (100%): | 86 lx |         |       |

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m



环境湿度:

核 验:

## 亮度限制曲线

| 眩光评价价值 | 质量等级 | 使用照度 / lx |      |     |       |  |  |  |  |
|--------|------|-----------|------|-----|-------|--|--|--|--|
|        |      | 2000      | 1000 | 500 | <=300 |  |  |  |  |
| 1.15   | A    |           |      |     |       |  |  |  |  |
| 1.50   | B    |           |      |     |       |  |  |  |  |
| 1.85   | C    |           |      |     |       |  |  |  |  |
| 2.20   | D    |           |      |     |       |  |  |  |  |
| 2.55   | E    |           |      |     |       |  |  |  |  |

a b c d e f g h

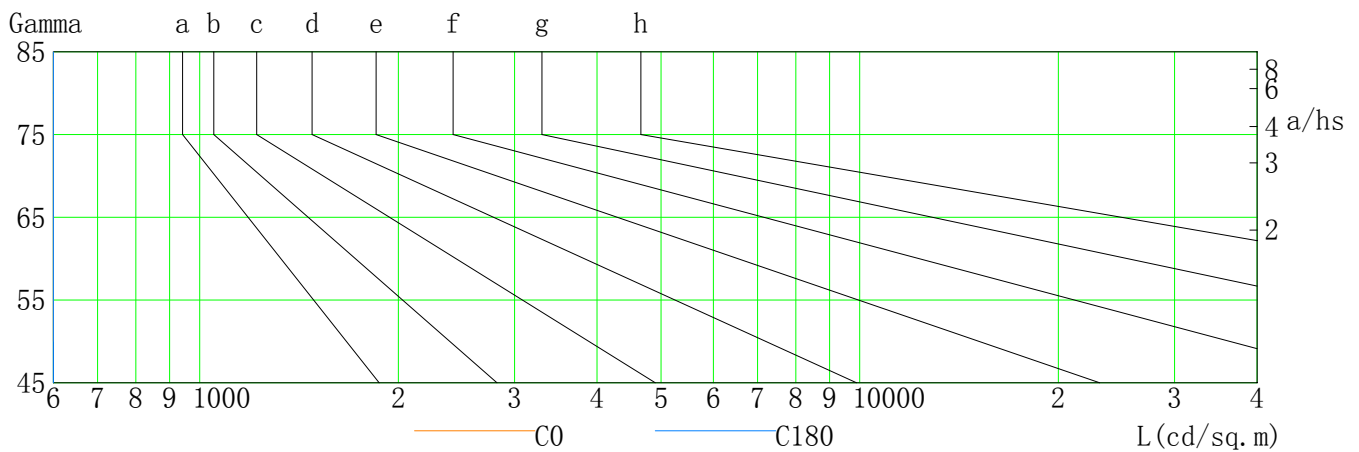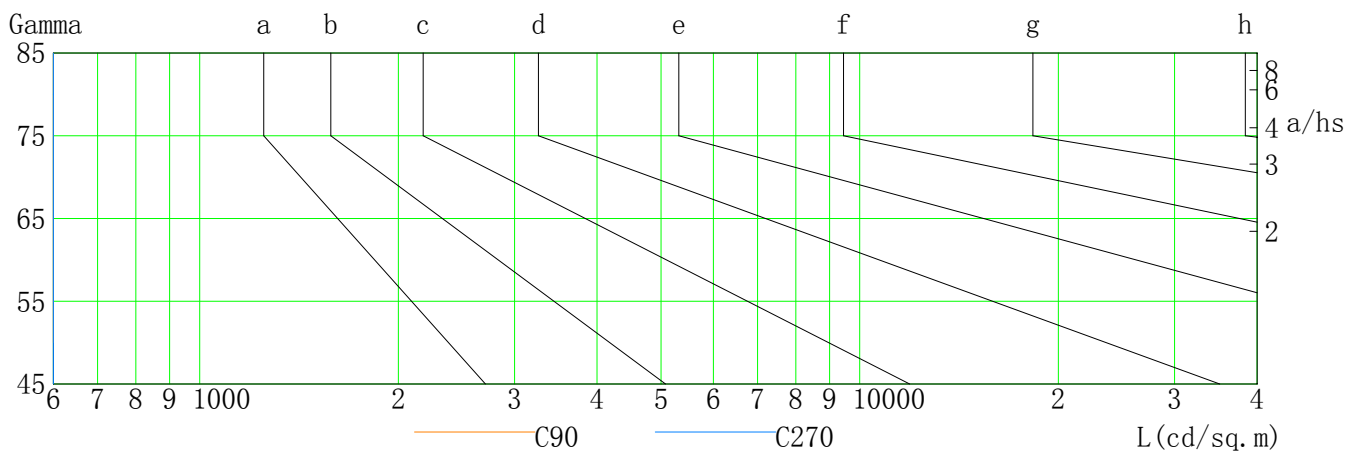

| L (cd/sq. m) | G45 | G50 | G55 | G60 | G65 | G70 | G75 | G80 | G85 |
|--------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| C0           | 4   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| C90          | 8   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| C180         | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| C270         | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

## 照度距离关系图

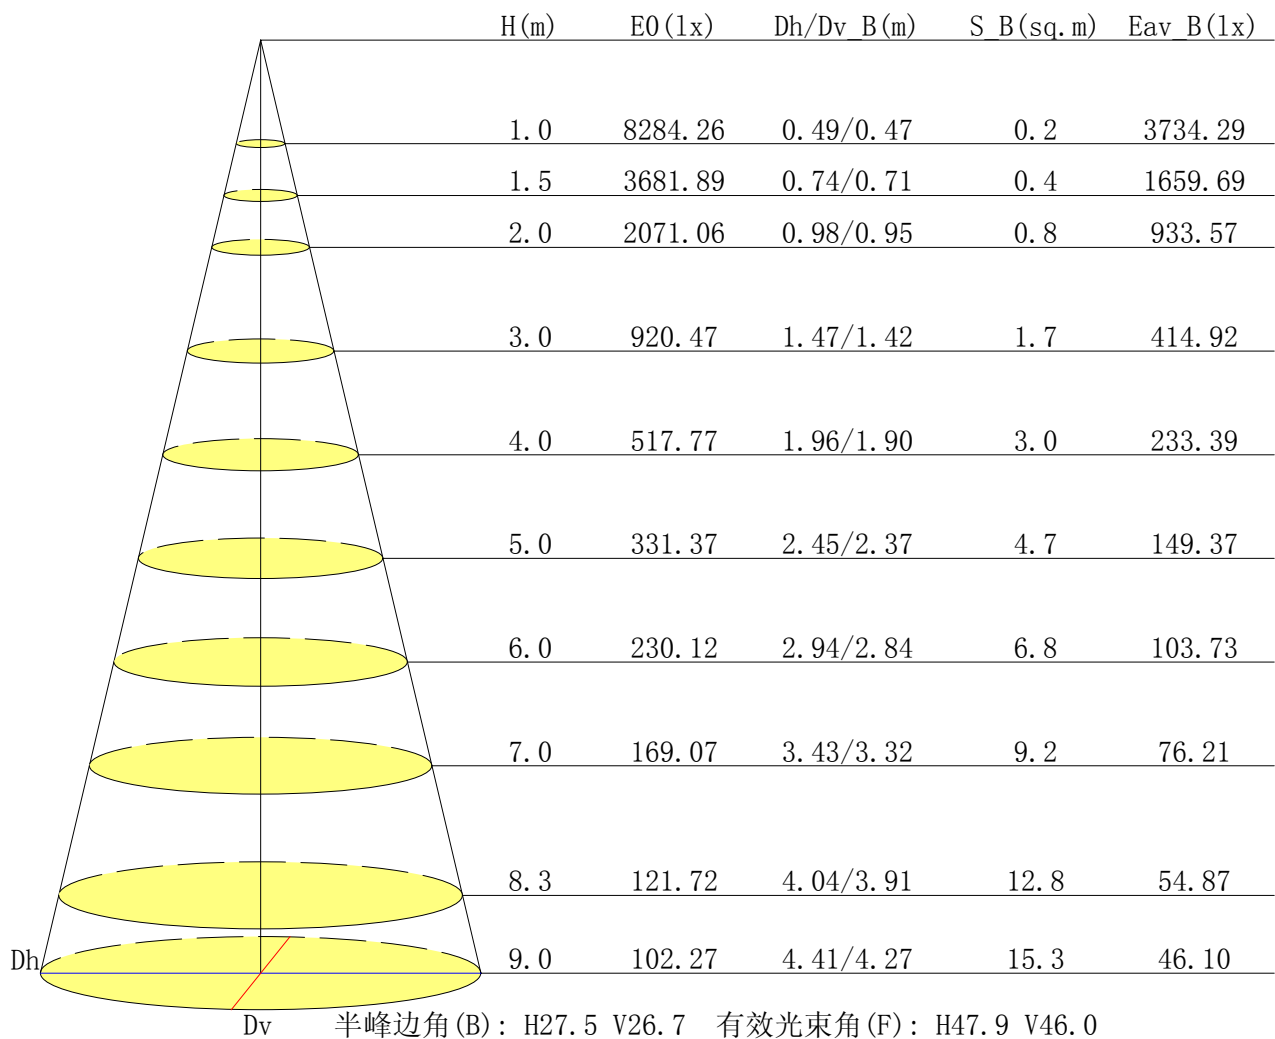

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

## 垂直面等照度曲线

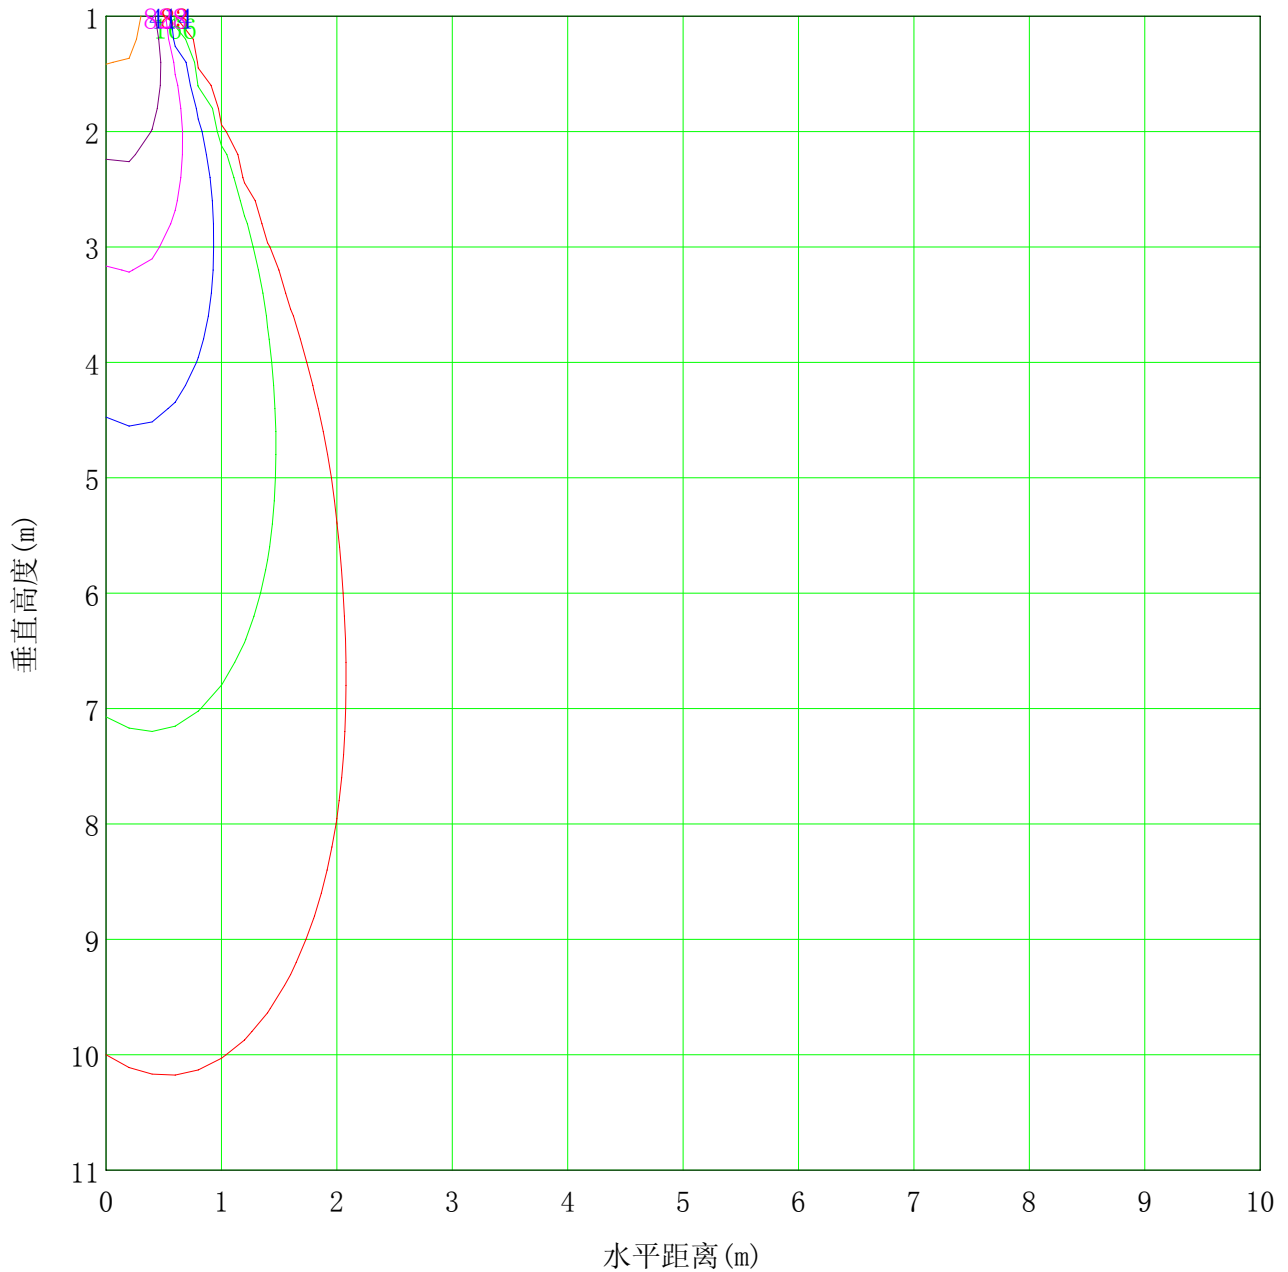

|                 |                 |             |
|-----------------|-----------------|-------------|
| 最低高度(米): 1m     | 最大高度(米): 11     | 最大照度值: 8284 |
| ( 1%): 83 lx    | ( 2%): 166 lx   |             |
| ( 5%): 414 lx   | ( 10%): 828 lx  |             |
| ( 20%): 1657 lx | ( 50%): 4142 lx |             |
| (100%): 8284 lx |                 |             |

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

## 灯具有效平均照度图

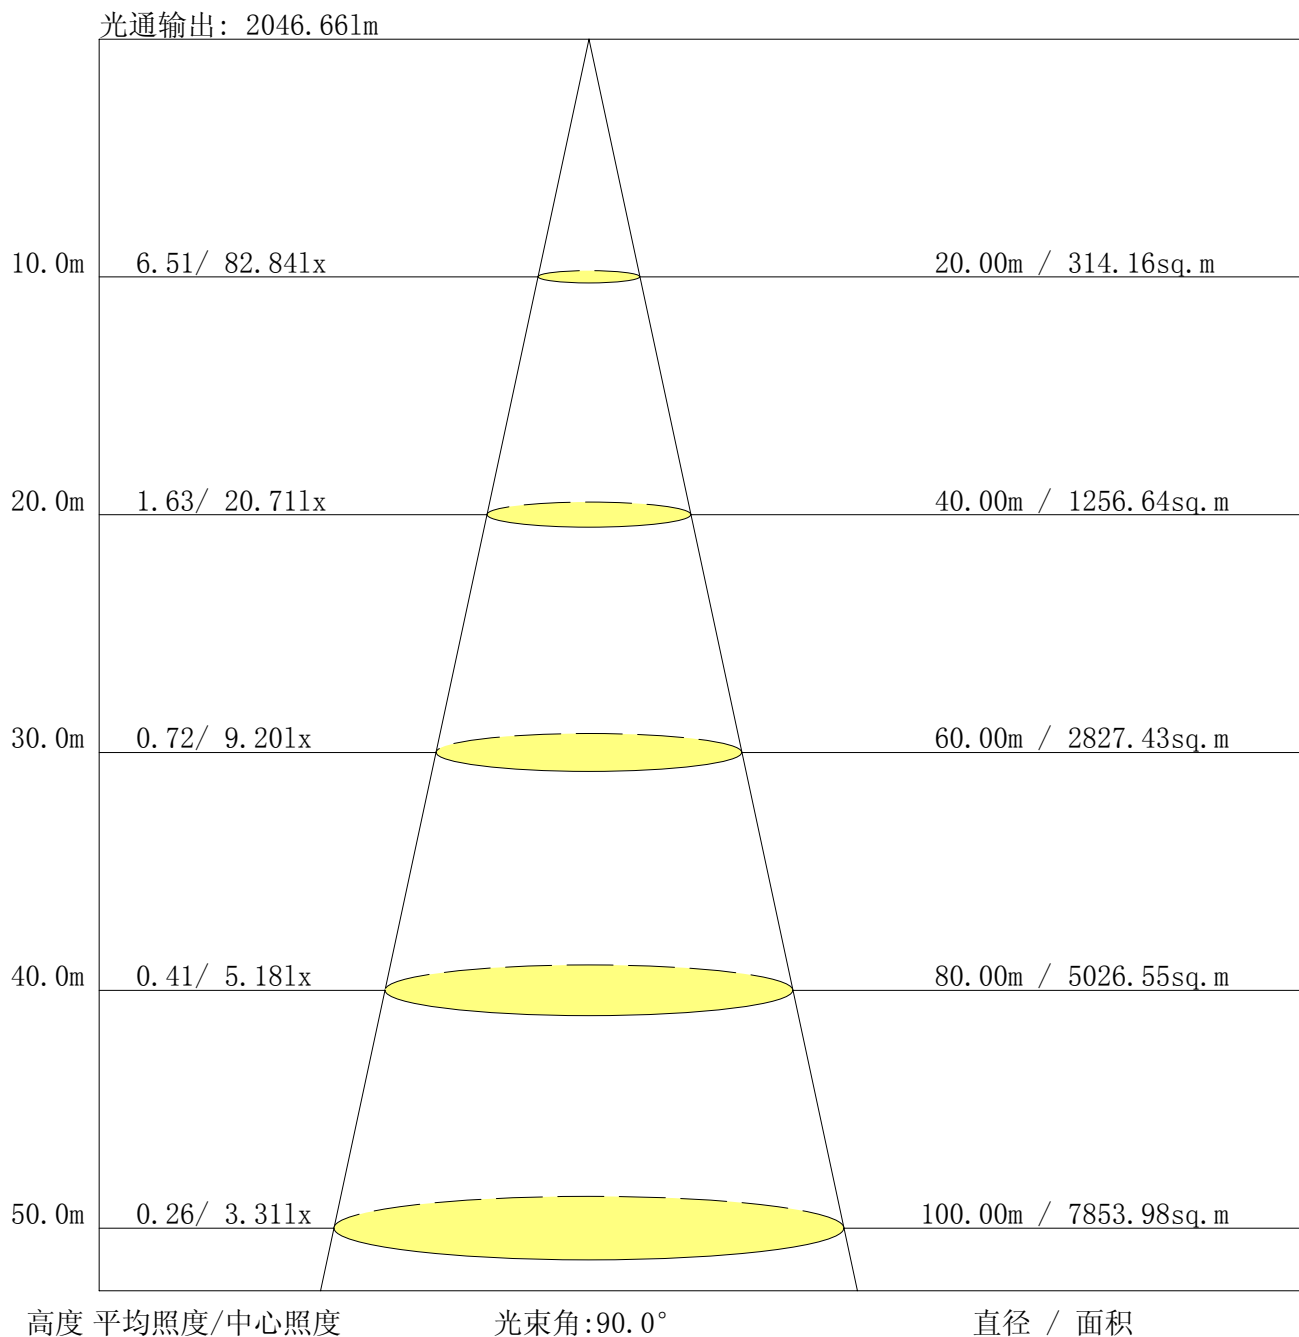

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



## 光强分布数据表格

单位: cd

| G\C   | C0.0   | C90.0  | C180.0 | C270.0 | C360.0 |  |  |  |  |  |
|-------|--------|--------|--------|--------|--------|--|--|--|--|--|
| G0.0  | 8284.3 | 8128.3 | 8284.3 | 8128.3 | 8284.3 |  |  |  |  |  |
| G1.0  | 8457.4 | 7850.0 | 8055.3 | 8339.3 | 8457.4 |  |  |  |  |  |
| G2.0  | 8566.0 | 7519.5 | 7773.0 | 8503.1 | 8566.0 |  |  |  |  |  |
| G3.0  | 8616.0 | 7159.2 | 7456.1 | 8600.7 | 8616.0 |  |  |  |  |  |
| G4.0  | 8598.0 | 6755.6 | 7090.5 | 8631.6 | 8598.0 |  |  |  |  |  |
| G5.0  | 8516.6 | 6330.0 | 6700.8 | 8598.0 | 8516.6 |  |  |  |  |  |
| G6.0  | 8374.9 | 5896.2 | 6276.0 | 8500.2 | 8374.9 |  |  |  |  |  |
| G7.0  | 8179.0 | 5447.6 | 5838.8 | 8349.3 | 8179.0 |  |  |  |  |  |
| G8.0  | 7931.1 | 5010.4 | 5392.3 | 8137.5 | 7931.1 |  |  |  |  |  |
| G9.0  | 7645.3 | 4565.0 | 4953.5 | 7876.4 | 7645.3 |  |  |  |  |  |
| G10.0 | 7299.6 | 4128.8 | 4489.1 | 7548.3 | 7299.6 |  |  |  |  |  |
| G11.0 | 6927.9 | 3706.4 | 4052.4 | 7159.7 | 6927.9 |  |  |  |  |  |
| G12.0 | 6522.9 | 3320.9 | 3620.7 | 6701.1 | 6522.9 |  |  |  |  |  |
| G13.0 | 6087.3 | 2941.9 | 3216.5 | 6193.3 | 6087.3 |  |  |  |  |  |
| G14.0 | 5627.9 | 2601.9 | 2829.8 | 5677.0 | 5627.9 |  |  |  |  |  |
| G15.0 | 5152.3 | 2299.8 | 2470.0 | 5103.1 | 5152.3 |  |  |  |  |  |
| G16.0 | 4658.5 | 2034.1 | 2154.7 | 4569.7 | 4658.5 |  |  |  |  |  |
| G17.0 | 4189.6 | 1794.1 | 1882.4 | 4072.2 | 4189.6 |  |  |  |  |  |
| G18.0 | 3709.0 | 1585.0 | 1637.6 | 3576.0 | 3709.0 |  |  |  |  |  |
| G19.0 | 3280.5 | 1392.6 | 1434.1 | 3111.1 | 3280.5 |  |  |  |  |  |
| G20.0 | 2876.6 | 1223.1 | 1244.0 | 2629.7 | 2876.6 |  |  |  |  |  |
| G21.0 | 2499.4 | 1039.9 | 1076.1 | 2102.9 | 2499.4 |  |  |  |  |  |
| G22.0 | 2136.4 | 875.0  | 908.3  | 1583.9 | 2136.4 |  |  |  |  |  |
| G23.0 | 1770.6 | 712.1  | 757.9  | 1092.8 | 1770.6 |  |  |  |  |  |
| G24.0 | 1387.3 | 570.5  | 612.0  | 705.0  | 1387.3 |  |  |  |  |  |
| G25.0 | 990.8  | 438.3  | 476.4  | 455.2  | 990.8  |  |  |  |  |  |
| G26.0 | 630.5  | 332.5  | 349.2  | 307.7  | 630.5  |  |  |  |  |  |
| G27.0 | 392.8  | 248.2  | 237.9  | 214.9  | 392.8  |  |  |  |  |  |
| G28.0 | 256.4  | 192.4  | 163.1  | 159.7  | 256.4  |  |  |  |  |  |
| G29.0 | 185.3  | 154.4  | 125.3  | 121.9  | 185.3  |  |  |  |  |  |
| G30.0 | 140.6  | 128.7  | 98.6   | 94.6   | 140.6  |  |  |  |  |  |
| G31.0 | 110.5  | 110.2  | 79.0   | 74.0   | 110.5  |  |  |  |  |  |
| G32.0 | 88.3   | 96.5   | 64.2   | 58.4   | 88.3   |  |  |  |  |  |
| G33.0 | 71.6   | 83.8   | 52.3   | 45.5   | 71.6   |  |  |  |  |  |
| G34.0 | 57.4   | 71.1   | 42.8   | 35.7   | 57.4   |  |  |  |  |  |
| G35.0 | 46.3   | 59.7   | 35.4   | 27.2   | 46.3   |  |  |  |  |  |
| G36.0 | 36.7   | 50.8   | 28.8   | 20.1   | 36.7   |  |  |  |  |  |

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



## 光强分布数据表格 (续 1)

单位: cd

| G\C   | C0.0 | C90.0 | C180.0 | C270.0 | C360.0 |  |  |  |  |  |
|-------|------|-------|--------|--------|--------|--|--|--|--|--|
| G37.0 | 28.8 | 42.6  | 23.5   | 14.8   | 28.8   |  |  |  |  |  |
| G38.0 | 22.5 | 36.5  | 18.5   | 9.8    | 22.5   |  |  |  |  |  |
| G39.0 | 18.2 | 30.7  | 14.0   | 6.1    | 18.2   |  |  |  |  |  |
| G40.0 | 14.5 | 25.6  | 10.6   | 2.6    | 14.5   |  |  |  |  |  |
| G41.0 | 12.2 | 21.1  | 7.1    | 0.0    | 12.2   |  |  |  |  |  |
| G42.0 | 9.5  | 17.5  | 4.2    | 0.0    | 9.5    |  |  |  |  |  |
| G43.0 | 7.9  | 14.0  | 1.6    | 0.0    | 7.9    |  |  |  |  |  |
| G44.0 | 6.1  | 10.6  | 0.0    | 0.0    | 6.1    |  |  |  |  |  |
| G45.0 | 4.2  | 7.9   | 0.0    | 0.0    | 4.2    |  |  |  |  |  |
| G46.0 | 3.2  | 5.0   | 0.0    | 0.0    | 3.2    |  |  |  |  |  |
| G47.0 | 2.1  | 2.6   | 0.0    | 0.0    | 2.1    |  |  |  |  |  |
| G48.0 | 0.8  | 1.6   | 0.0    | 0.0    | 0.8    |  |  |  |  |  |
| G49.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G50.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G51.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G52.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G53.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G54.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G55.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G56.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G57.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G58.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G59.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G60.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G61.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G62.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G63.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G64.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G65.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G66.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G67.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G68.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G69.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G70.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G71.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G72.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G73.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



## 光强分布数据表格 (续 2)

单位: cd

| G\C    | C0.0 | C90.0 | C180.0 | C270.0 | C360.0 |  |  |  |  |  |
|--------|------|-------|--------|--------|--------|--|--|--|--|--|
| G74.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G75.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G76.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G77.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G78.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G79.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G80.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G81.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G82.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G83.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G84.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G85.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G86.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G87.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G88.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G89.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G90.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G91.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G92.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G93.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G94.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G95.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G96.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G97.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G98.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G99.0  | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G100.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G101.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G102.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G103.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G104.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G105.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G106.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G107.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G108.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G109.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G110.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



## 光强分布数据表格 (续 3)

单位: cd

| G\C    | C0.0 | C90.0 | C180.0 | C270.0 | C360.0 |  |  |  |  |  |
|--------|------|-------|--------|--------|--------|--|--|--|--|--|
| G111.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G112.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G113.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G114.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G115.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G116.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G117.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G118.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G119.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G120.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G121.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G122.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G123.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G124.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G125.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G126.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G127.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G128.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G129.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G130.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G131.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G132.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G133.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G134.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G135.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G136.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G137.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G138.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G139.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G140.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G141.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G142.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G143.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G144.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G145.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G146.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G147.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



## 光强分布数据表格 (续 4)

单位: cd

| G\C    | C0.0 | C90.0 | C180.0 | C270.0 | C360.0 |  |  |  |  |  |
|--------|------|-------|--------|--------|--------|--|--|--|--|--|
| G148.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G149.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G150.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G151.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G152.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G153.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G154.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G155.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G156.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G157.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G158.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G159.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G160.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G161.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G162.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G163.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G164.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G165.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G166.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G167.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G168.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G169.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G170.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G171.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G172.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G173.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G174.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G175.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G176.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G177.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G178.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G179.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
| G180.0 | 0.0  | 0.0   | 0.0    | 0.0    | 0.0    |  |  |  |  |  |
|        |      |       |        |        |        |  |  |  |  |  |
|        |      |       |        |        |        |  |  |  |  |  |
|        |      |       |        |        |        |  |  |  |  |  |
|        |      |       |        |        |        |  |  |  |  |  |

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验: