

报告编号:

测试时间: 2019-05-31 14:33

产品特征

灯具制造厂商:

灯具型号: XQ613035.01W-D36

电压: 221.5 V

功率: 35.50 W

光源个数: 1

电流: 0.166 A

功率因数: 0.965

光度结果

灯具CIE分类: 直接型

灯具光通量: 2068.4 lm

下射光通量比: 100%

额定光通量: 2068.4 lm

灯具效率: 100%

上射光通量比: 0%

水平扩散角 (25%, 50%, 75%, 100%): H48.7, H39.8, H29, H1

垂直扩散角 (25%, 50%, 75%, 100%): V46.5, V38.1, V28.3, V2

灯具光效等级 (LER): 58

峰值光强: 5375.44 cd


中心光强: 5368.82 cd

峰值光强位置: H0 V1

灯具实物照片



配光曲线

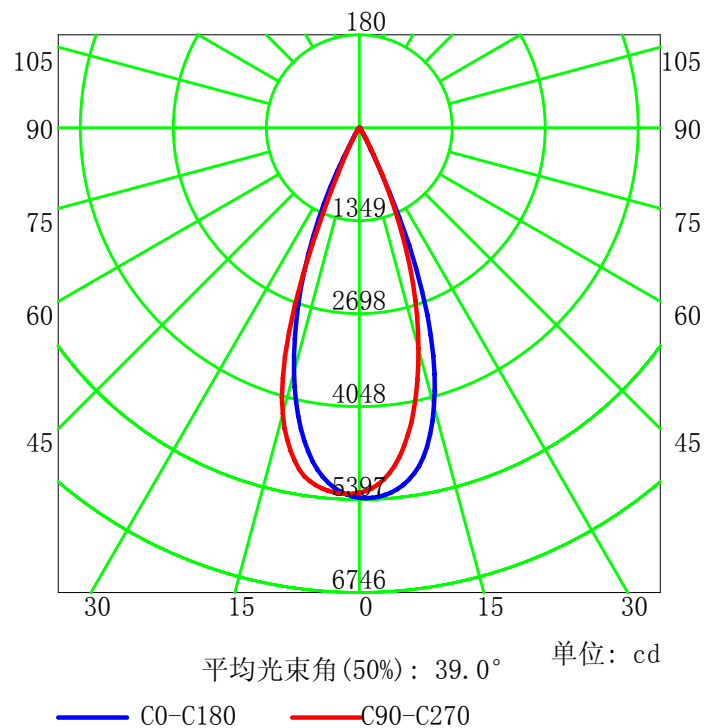

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

配光曲线

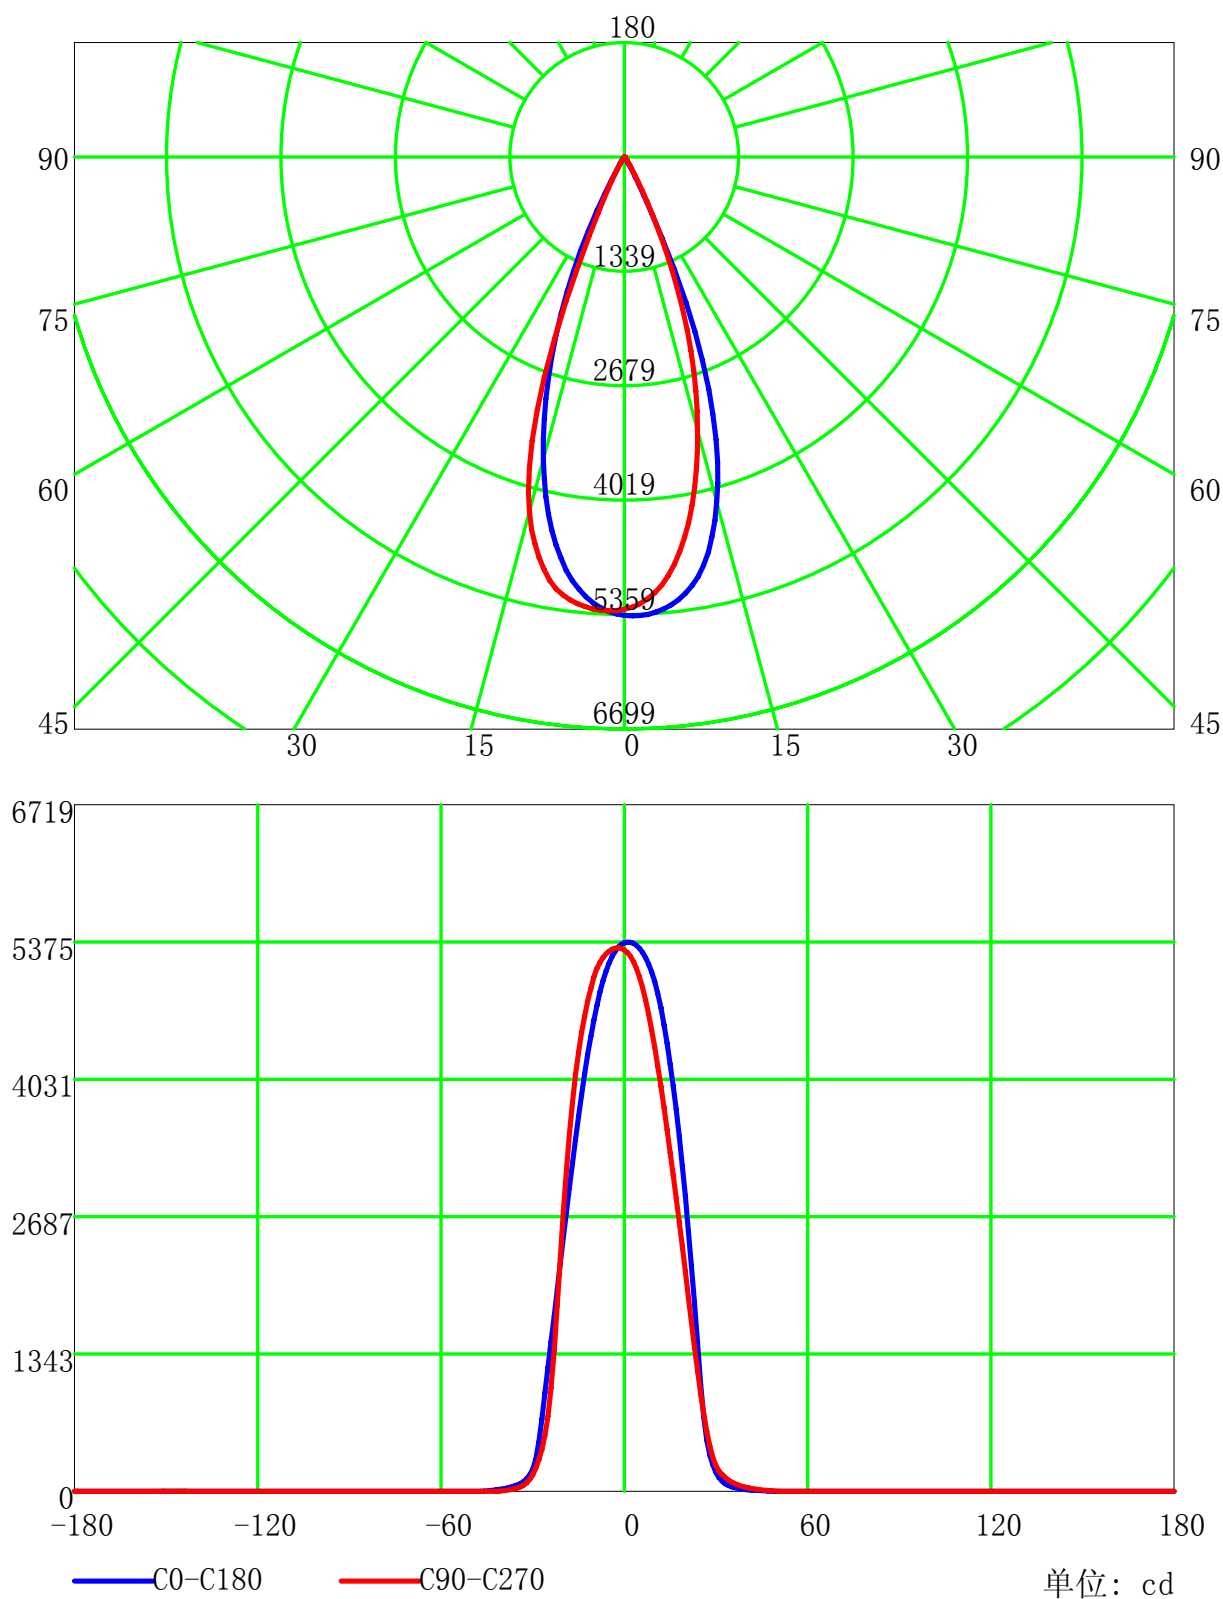

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

配光曲线(cd/klm)

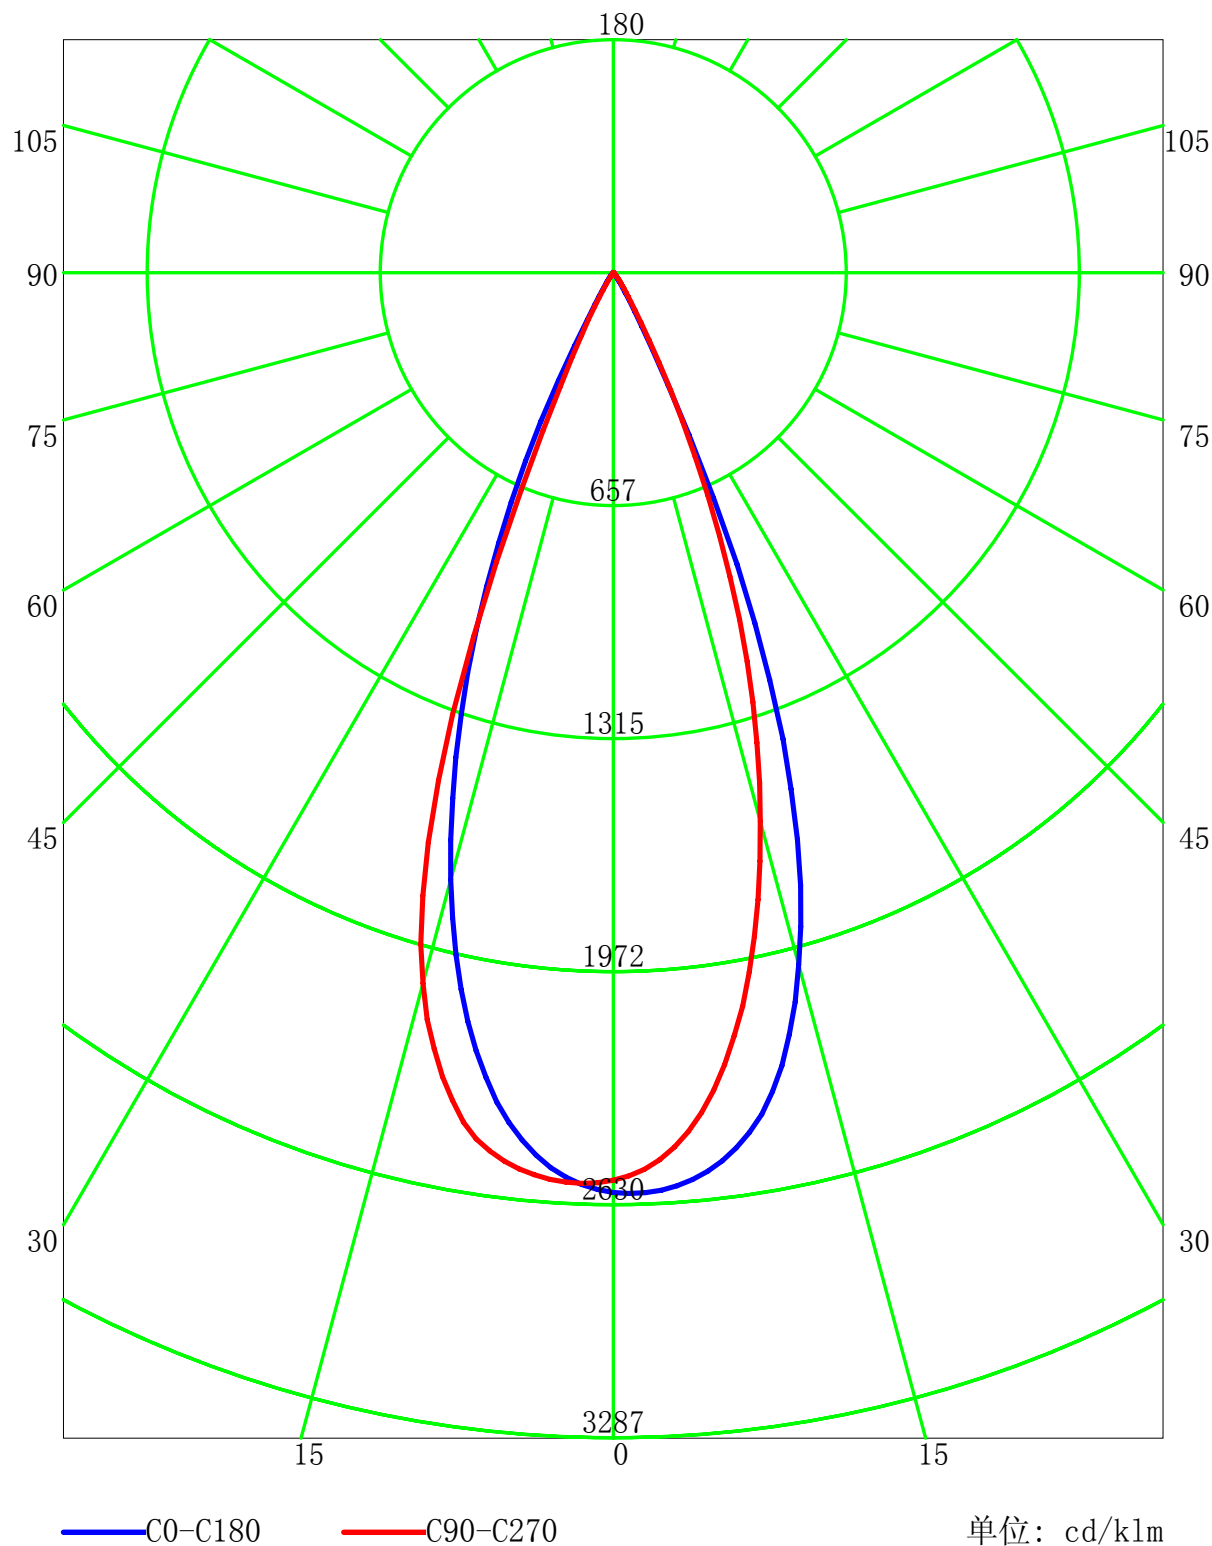

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

室内灯具利用系数表


RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92
3	107	102	98	95	105	101	97	94	98	95	93	96	93	92	94	92	90	89
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85
5	100	94	89	86	98	93	89	86	91	88	85	89	86	84	88	85	83	82
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79
7	93	86	82	79	92	86	82	79	85	81	78	84	80	78	83	80	77	76
8	90	83	79	76	89	83	79	76	82	78	75	81	78	75	80	77	75	74
9	88	80	76	73	87	80	76	73	79	75	73	78	75	72	78	75	72	71
10	85	78	73	70	84	77	73	70	77	73	70	76	72	70	75	72	70	69

最大允许安装距离高度比(横向): 0.66

最大允许安装距离高度比(纵向): 0.65

最大允许安装距离高度比(对角): 0.59

灯具概算曲线

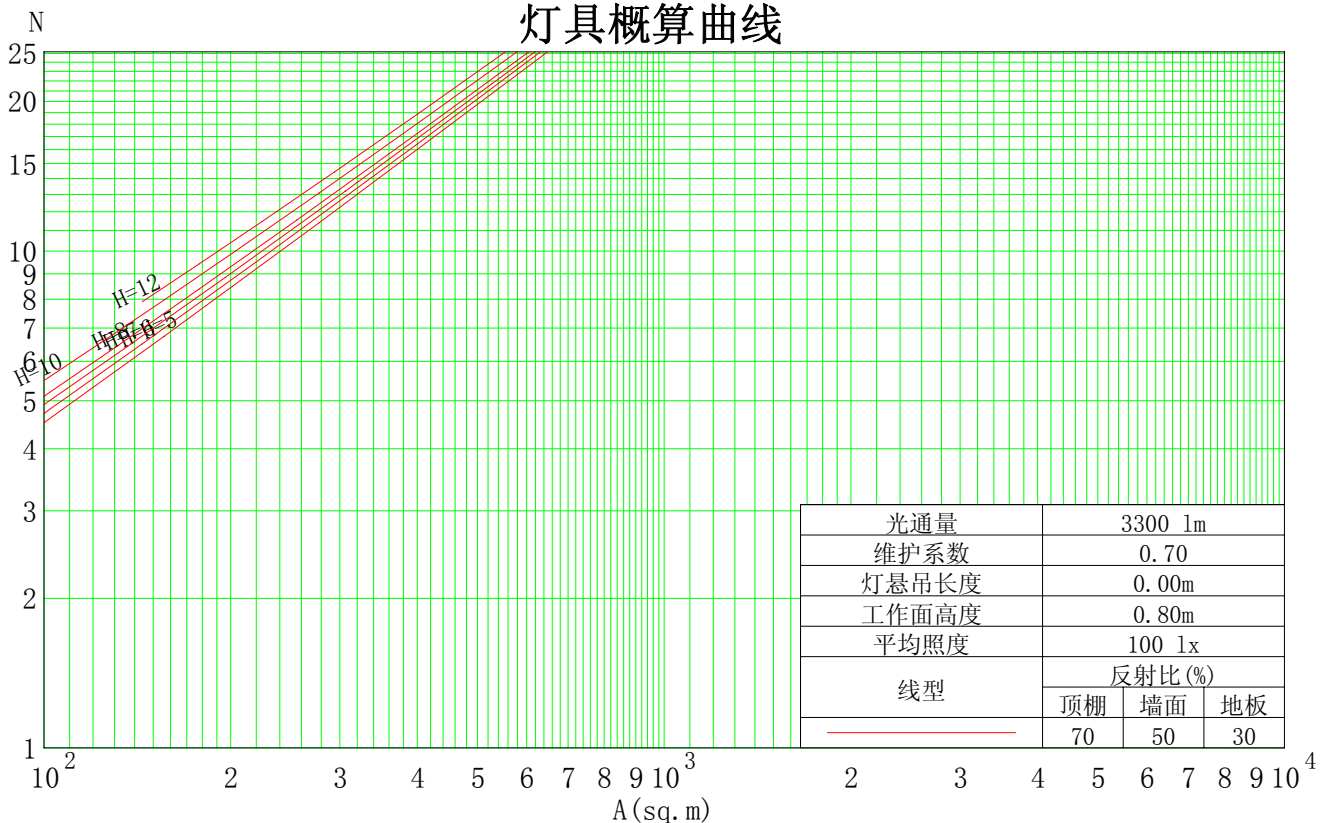

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

水平面等照度曲线

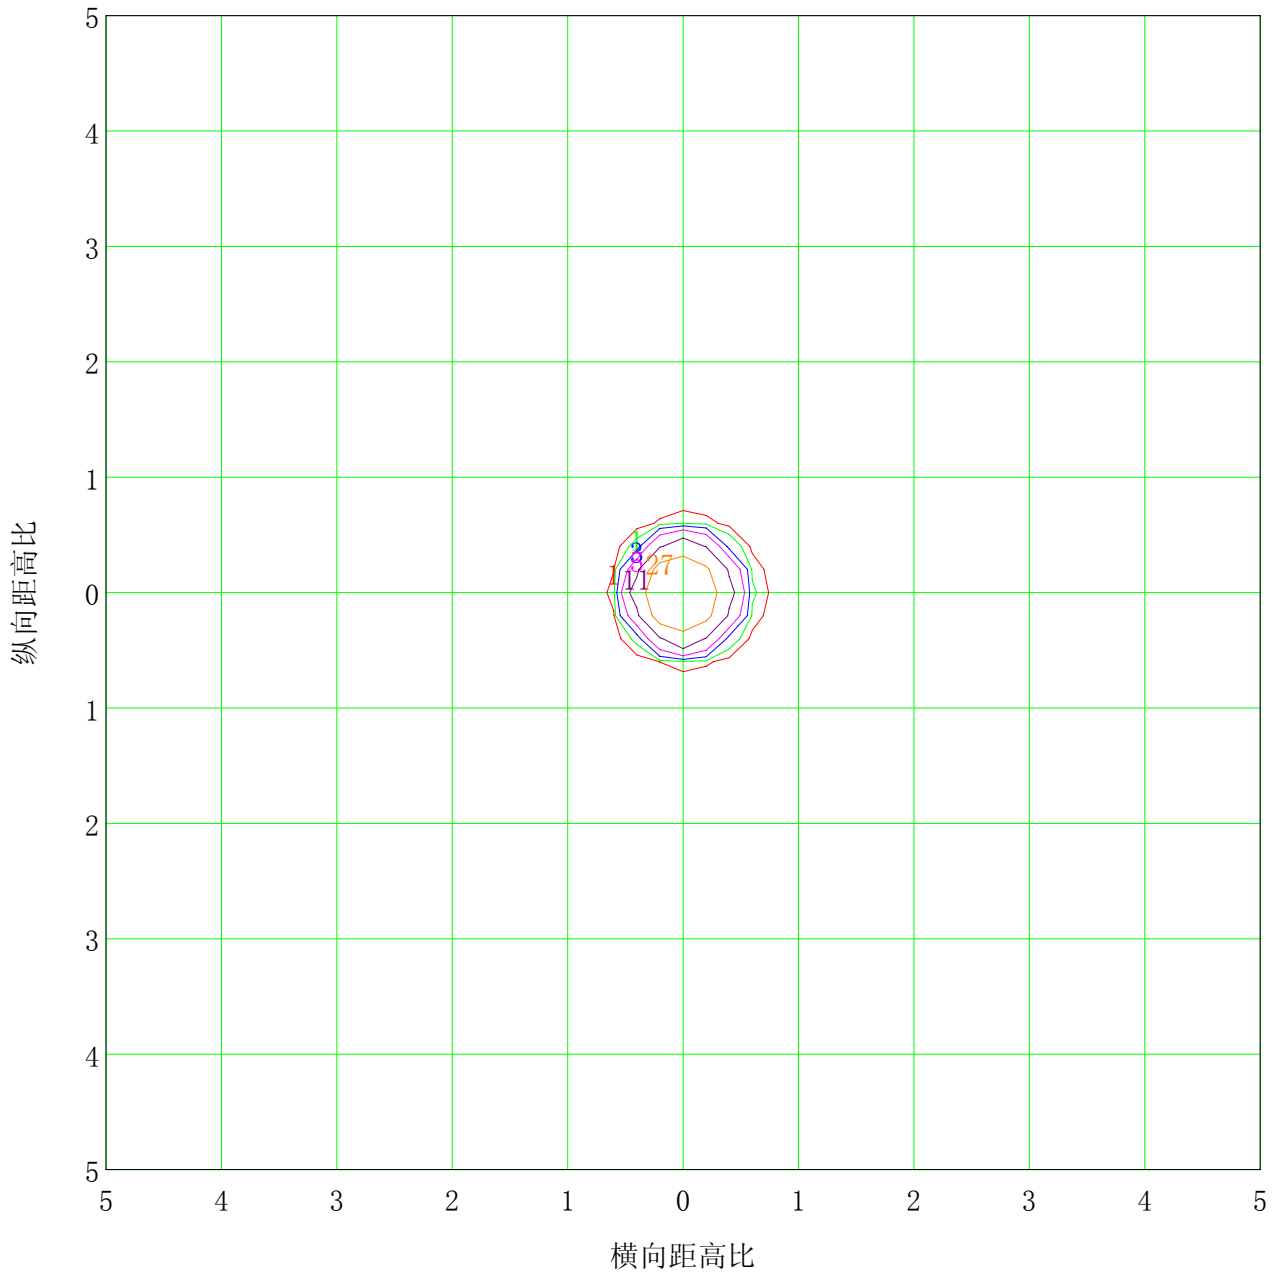

安装高度: 10m

最大照度值(100%): 54 lx

(1%): 1 lx
(5%): 3 lx
(20%): 11 lx
(100%): 54 lx

(2%): 1 lx
(10%): 5 lx
(50%): 27 lx

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m



环境湿度:

核 验:

亮度限制曲线

眩光评价价值	质量等级	使用照度 / lx							
		2000	1000	500	<=300				
1.15	A								
1.50	B								
1.85	C								
2.20	D								
2.55	E								

a b c d e f g h

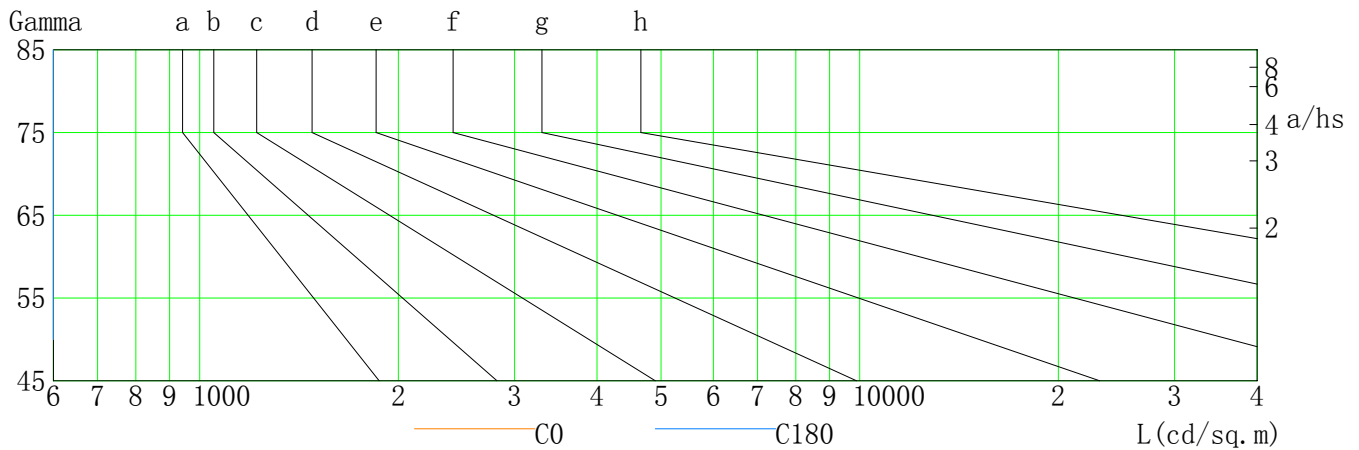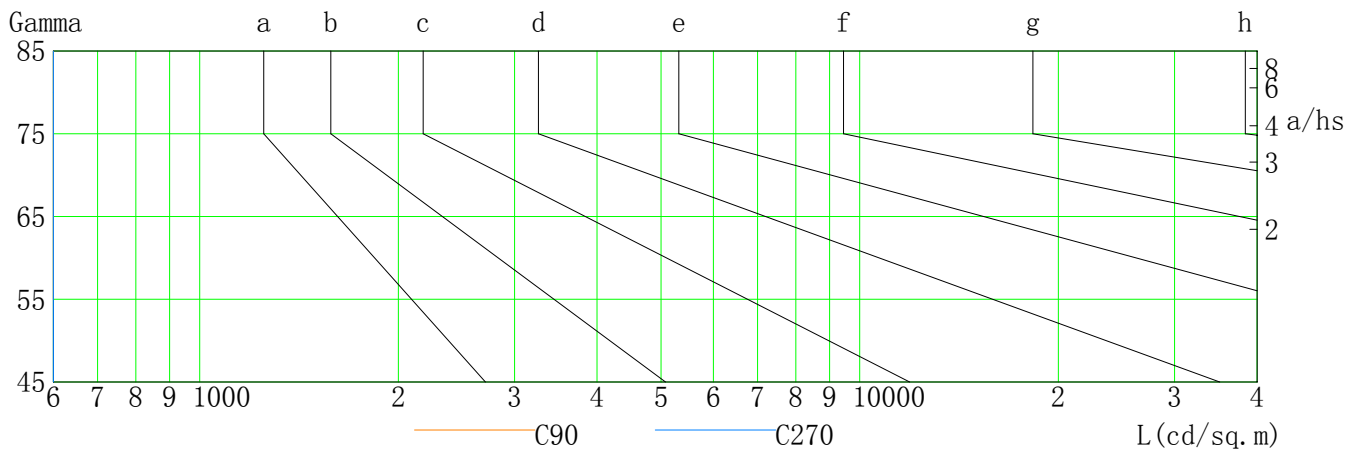

L (cd/sq. m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	6	0	0	0	0	0	0	0	0
C90	15	2	0	0	0	0	0	0	0
C180	6	0	0	0	0	0	0	0	0
C270	0	0	0	0	0	0	0	0	0

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

照度距离关系图

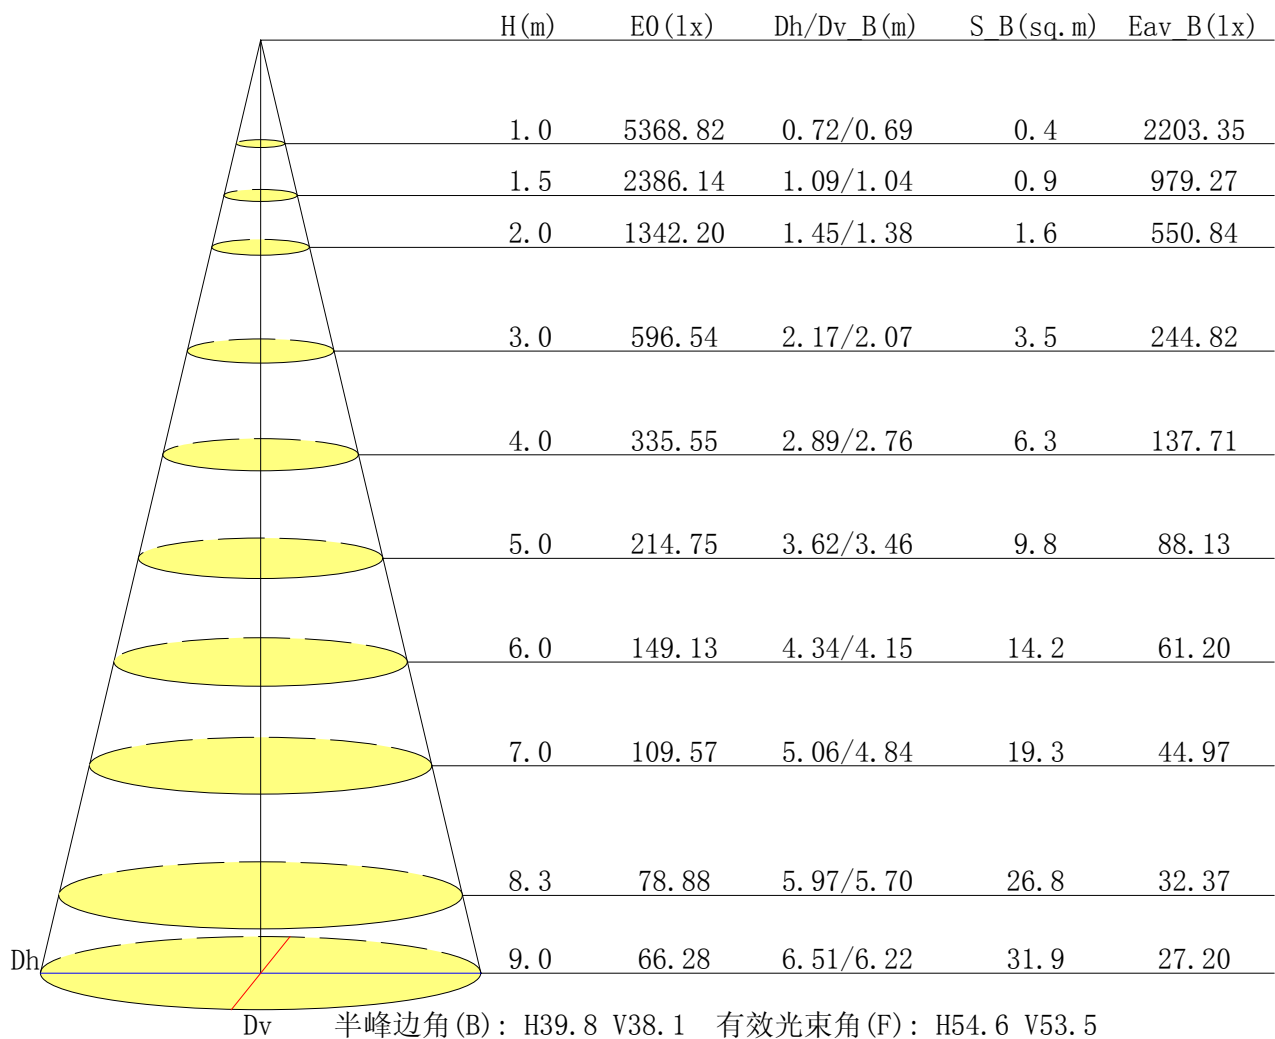

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

垂直面等照度曲线

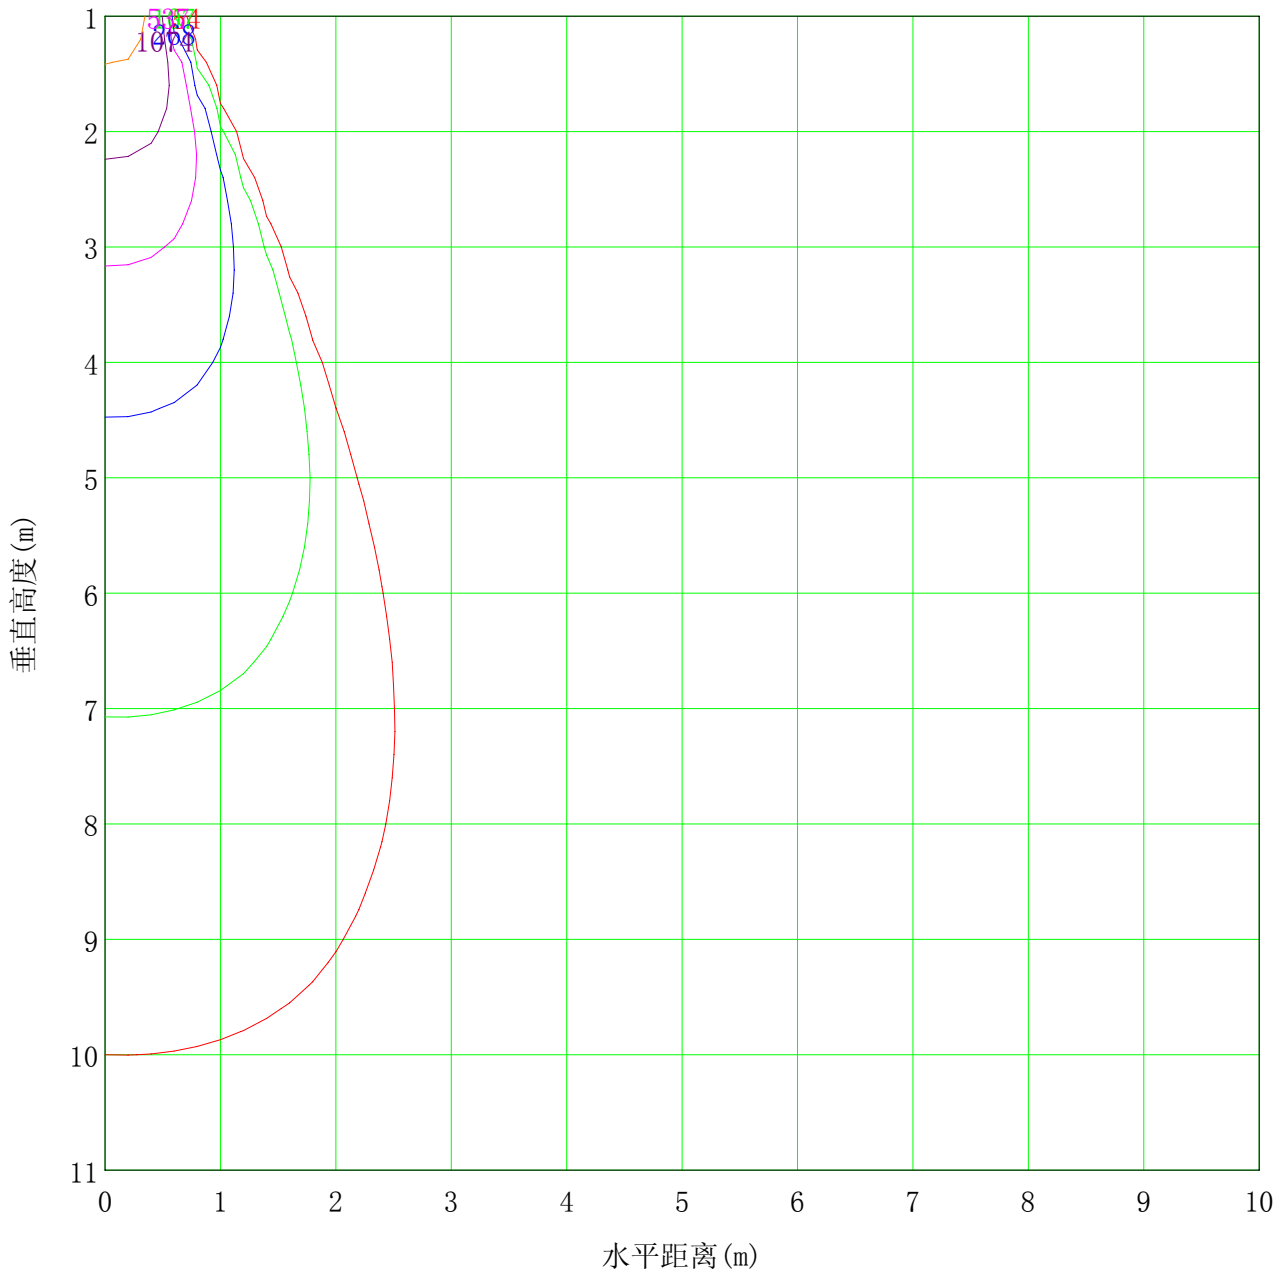

最低高度(米): 1m	最大高度(米): 11	最大照度值: 5369
(1%): 54 lx	(2%): 107 lx	
(5%): 268 lx	(10%): 537 lx	
(20%): 1074 lx	(50%): 2684 lx	
(100%): 5369 lx		

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

灯具有效平均照度图

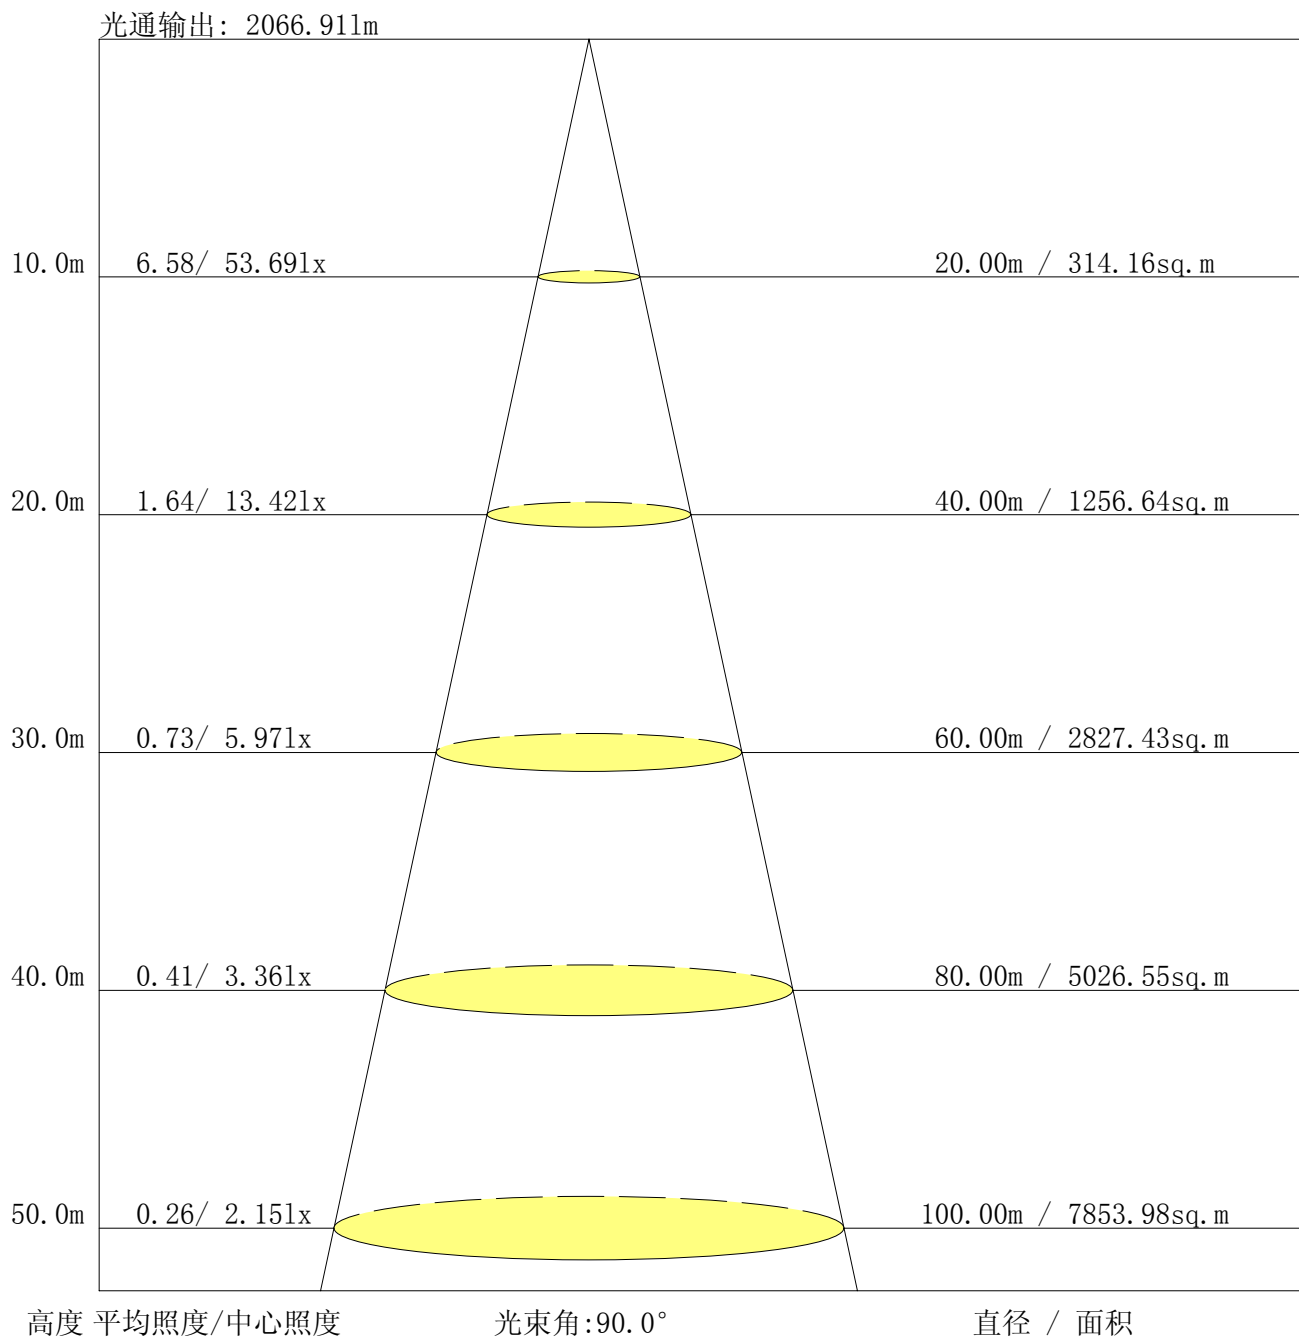

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



光强分布数据表格

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G0.0	5368.8	5297.2	5368.8	5297.2	5368.8					
G1.0	5375.4	5273.1	5352.4	5313.0	5375.4					
G2.0	5373.6	5237.2	5325.7	5319.1	5373.6					
G3.0	5363.5	5184.6	5287.1	5315.4	5363.5					
G4.0	5342.6	5116.6	5236.9	5305.6	5342.6					
G5.0	5313.8	5032.3	5171.4	5286.1	5313.8					
G6.0	5273.9	4930.3	5091.3	5260.4	5273.9					
G7.0	5223.2	4807.9	4998.2	5224.8	5223.2					
G8.0	5158.7	4668.0	4889.3	5178.0	5158.7					
G9.0	5081.2	4510.2	4754.2	5119.3	5081.2					
G10.0	4989.0	4347.9	4611.5	5036.0	4989.0					
G11.0	4870.5	4158.9	4452.3	4921.8	4870.5					
G12.0	4733.1	3961.7	4276.3	4798.6	4733.1					
G13.0	4565.0	3756.1	4085.4	4649.3	4565.0					
G14.0	4388.1	3540.6	3880.0	4493.0	4388.1					
G15.0	4182.2	3316.2	3668.3	4294.8	4182.2					
G16.0	3971.8	3098.9	3444.7	4078.3	3971.8					
G17.0	3740.2	2869.2	3207.8	3803.9	3740.2					
G18.0	3478.5	2637.4	2976.0	3497.5	3478.5					
G19.0	3186.7	2400.2	2727.8	3134.3	3186.7					
G20.0	2896.7	2156.3	2486.1	2743.1	2896.7					
G21.0	2546.9	1899.0	2232.6	2276.0	2546.9					
G22.0	2206.5	1655.1	1973.8	1821.3	2206.5					
G23.0	1849.3	1411.1	1713.5	1376.2	1849.3					
G24.0	1439.9	1175.0	1466.8	1011.1	1439.9					
G25.0	1045.7	953.0	1215.2	733.3	1045.7					
G26.0	729.8	763.7	965.9	547.7	729.8					
G27.0	502.5	587.4	707.7	409.2	502.5					
G28.0	355.5	445.7	482.7	308.8	355.5					
G29.0	259.9	331.5	314.0	226.5	259.9					
G30.0	187.7	252.4	217.3	162.3	187.7					
G31.0	135.9	199.3	159.9	116.1	135.9					
G32.0	101.8	164.9	122.9	83.8	101.8					
G33.0	75.6	138.8	97.0	60.5	75.6					
G34.0	59.7	114.2	78.3	44.9	59.7					
G35.0	46.8	93.8	63.7	33.8	46.8					
G36.0	37.3	78.8	52.1	25.6	37.3					

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



光强分布数据表格 (续 1)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G37.0	30.4	65.3	42.6	18.5	30.4					
G38.0	24.3	55.0	35.4	14.0	24.3					
G39.0	19.8	46.8	28.8	8.7	19.8					
G40.0	16.6	38.9	23.8	5.6	16.6					
G41.0	14.5	32.5	19.0	2.4	14.5					
G42.0	12.4	27.0	14.8	0.0	12.4					
G43.0	10.6	22.7	11.1	0.0	10.6					
G44.0	8.7	18.8	7.9	0.0	8.7					
G45.0	6.3	15.1	5.6	0.0	6.3					
G46.0	5.0	11.6	2.9	0.0	5.0					
G47.0	3.2	8.7	0.5	0.0	3.2					
G48.0	1.6	6.1	0.0	0.0	1.6					
G49.0	0.8	4.2	0.0	0.0	0.8					
G50.0	0.0	1.6	0.0	0.0	0.0					
G51.0	0.0	0.0	0.0	0.0	0.0					
G52.0	0.0	0.0	0.0	0.0	0.0					
G53.0	0.0	0.0	0.0	0.0	0.0					
G54.0	0.0	0.0	0.0	0.0	0.0					
G55.0	0.0	0.0	0.0	0.0	0.0					
G56.0	0.0	0.0	0.0	0.0	0.0					
G57.0	0.0	0.0	0.0	0.0	0.0					
G58.0	0.0	0.0	0.0	0.0	0.0					
G59.0	0.0	0.0	0.0	0.0	0.0					
G60.0	0.0	0.0	0.0	0.0	0.0					
G61.0	0.0	0.0	0.0	0.0	0.0					
G62.0	0.0	0.0	0.0	0.0	0.0					
G63.0	0.0	0.0	0.0	0.0	0.0					
G64.0	0.0	0.0	0.0	0.0	0.0					
G65.0	0.0	0.0	0.0	0.0	0.0					
G66.0	0.0	0.0	0.0	0.0	0.0					
G67.0	0.0	0.0	0.0	0.0	0.0					
G68.0	0.0	0.0	0.0	0.0	0.0					
G69.0	0.0	0.0	0.0	0.0	0.0					
G70.0	0.0	0.0	0.0	0.0	0.0					
G71.0	0.0	0.0	0.0	0.0	0.0					
G72.0	0.0	0.0	0.0	0.0	0.0					
G73.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



光强分布数据表格 (续 2)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G74.0	0.0	0.0	0.0	0.0	0.0					
G75.0	0.0	0.0	0.0	0.0	0.0					
G76.0	0.0	0.0	0.0	0.0	0.0					
G77.0	0.0	0.0	0.0	0.0	0.0					
G78.0	0.0	0.0	0.0	0.0	0.0					
G79.0	0.0	0.0	0.0	0.0	0.0					
G80.0	0.0	0.0	0.0	0.0	0.0					
G81.0	0.0	0.0	0.0	0.0	0.0					
G82.0	0.0	0.0	0.0	0.0	0.0					
G83.0	0.0	0.0	0.0	0.0	0.0					
G84.0	0.0	0.0	0.0	0.0	0.0					
G85.0	0.0	0.0	0.0	0.0	0.0					
G86.0	0.0	0.0	0.0	0.0	0.0					
G87.0	0.0	0.0	0.0	0.0	0.0					
G88.0	0.0	0.0	0.0	0.0	0.0					
G89.0	0.0	0.0	0.0	0.0	0.0					
G90.0	0.0	0.0	0.0	0.0	0.0					
G91.0	0.0	0.0	0.0	0.0	0.0					
G92.0	0.0	0.0	0.0	0.0	0.0					
G93.0	0.0	0.0	0.0	0.0	0.0					
G94.0	0.0	0.0	0.0	0.0	0.0					
G95.0	0.0	0.0	0.0	0.0	0.0					
G96.0	0.0	0.0	0.0	0.0	0.0					
G97.0	0.0	0.0	0.0	0.0	0.0					
G98.0	0.0	0.0	0.0	0.0	0.0					
G99.0	0.0	0.0	0.0	0.0	0.0					
G100.0	0.0	0.0	0.0	0.0	0.0					
G101.0	0.0	0.0	0.0	0.0	0.0					
G102.0	0.0	0.0	0.0	0.0	0.0					
G103.0	0.0	0.0	0.0	0.0	0.0					
G104.0	0.0	0.0	0.0	0.0	0.0					
G105.0	0.0	0.0	0.0	0.0	0.0					
G106.0	0.0	0.0	0.0	0.0	0.0					
G107.0	0.0	0.0	0.0	0.0	0.0					
G108.0	0.0	0.0	0.0	0.0	0.0					
G109.0	0.0	0.0	0.0	0.0	0.0					
G110.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



光强分布数据表格 (续 3)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G111.0	0.0	0.0	0.0	0.0	0.0					
G112.0	0.0	0.0	0.0	0.0	0.0					
G113.0	0.0	0.0	0.0	0.0	0.0					
G114.0	0.0	0.0	0.0	0.0	0.0					
G115.0	0.0	0.0	0.0	0.0	0.0					
G116.0	0.0	0.0	0.0	0.0	0.0					
G117.0	0.0	0.0	0.0	0.0	0.0					
G118.0	0.0	0.0	0.0	0.0	0.0					
G119.0	0.0	0.0	0.0	0.0	0.0					
G120.0	0.0	0.0	0.0	0.0	0.0					
G121.0	0.0	0.0	0.0	0.0	0.0					
G122.0	0.0	0.0	0.0	0.0	0.0					
G123.0	0.0	0.0	0.0	0.0	0.0					
G124.0	0.0	0.0	0.0	0.0	0.0					
G125.0	0.0	0.0	0.0	0.0	0.0					
G126.0	0.0	0.0	0.0	0.0	0.0					
G127.0	0.0	0.0	0.0	0.0	0.0					
G128.0	0.0	0.0	0.0	0.0	0.0					
G129.0	0.0	0.0	0.0	0.0	0.0					
G130.0	0.0	0.0	0.0	0.0	0.0					
G131.0	0.0	0.0	0.0	0.0	0.0					
G132.0	0.0	0.0	0.0	0.0	0.0					
G133.0	0.0	0.0	0.0	0.0	0.0					
G134.0	0.0	0.0	0.0	0.0	0.0					
G135.0	0.0	0.0	0.0	0.0	0.0					
G136.0	0.0	0.0	0.0	0.0	0.0					
G137.0	0.0	0.0	0.0	0.0	0.0					
G138.0	0.0	0.0	0.0	0.0	0.0					
G139.0	0.0	0.0	0.0	0.0	0.0					
G140.0	0.0	0.0	0.0	0.3	0.0					
G141.0	0.0	0.0	0.0	0.5	0.0					
G142.0	0.0	0.0	0.0	1.1	0.0					
G143.0	0.0	0.0	0.0	1.3	0.0					
G144.0	0.0	0.0	0.0	1.9	0.0					
G145.0	0.0	0.0	0.0	1.9	0.0					
G146.0	0.0	0.0	0.0	2.6	0.0					
G147.0	0.0	0.0	0.0	2.1	0.0					

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



光强分布数据表格 (续 4)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G148.0	0.0	0.0	0.0	2.4	0.0					
G149.0	0.0	0.0	0.0	2.6	0.0					
G150.0	0.0	0.0	0.0	2.6	0.0					
G151.0	0.0	0.0	0.0	2.6	0.0					
G152.0	0.0	0.0	0.0	1.3	0.0					
G153.0	0.0	0.0	0.0	0.0	0.0					
G154.0	0.0	0.0	0.0	0.0	0.0					
G155.0	0.0	0.0	0.0	0.0	0.0					
G156.0	0.0	0.0	0.0	0.0	0.0					
G157.0	0.0	0.0	0.0	0.0	0.0					
G158.0	0.0	0.0	0.0	0.0	0.0					
G159.0	0.0	0.0	0.0	0.0	0.0					
G160.0	0.0	0.0	0.0	0.0	0.0					
G161.0	0.0	0.0	0.0	0.0	0.0					
G162.0	0.0	0.0	0.0	0.0	0.0					
G163.0	0.0	0.0	0.0	0.0	0.0					
G164.0	0.0	0.0	0.0	0.0	0.0					
G165.0	0.0	0.0	0.0	0.0	0.0					
G166.0	0.0	0.0	0.0	0.0	0.0					
G167.0	0.0	0.0	0.0	0.0	0.0					
G168.0	0.0	0.0	0.0	0.0	0.0					
G169.0	0.0	0.0	0.0	0.0	0.0					
G170.0	0.0	0.0	0.0	0.0	0.0					
G171.0	0.0	0.0	0.0	0.0	0.0					
G172.0	0.0	0.0	0.0	0.0	0.0					
G173.0	0.0	0.0	0.0	0.0	0.0					
G174.0	0.0	0.0	0.0	0.0	0.0					
G175.0	0.0	0.0	0.0	0.0	0.0					
G176.0	0.0	0.0	0.0	0.0	0.0					
G177.0	0.0	0.0	0.0	0.0	0.0					
G178.0	0.0	0.0	0.0	0.0	0.0					
G179.0	0.0	0.0	0.0	0.0	0.0					
G180.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验: