

报告编号:

测试时间: 2019-06-08 16:25

产品特征

灯具制造厂商:

灯具型号: XQ613035.01W-D15

电压: 221.5 V

功率: 36.60 W

光源个数: 1

电流: 0.170 A

功率因数: 0.968

光度结果

灯具CIE分类: 直接型

灯具光通量: 2084.9 lm

下射光通量比: 100%

额定光通量: 2084.9 lm

灯具效率: 100%

上射光通量比: 0%

水平扩散角 (25%, 50%, 75%, 100%): H26.7, H17.9, H10.9, H1

垂直扩散角 (25%, 50%, 75%, 100%): V26.8, V18.1, V11.3, V2

灯具光效等级 (LER): 57

峰值光强: 14690.63 cd


中心光强: 14337.99 cd

峰值光强位置: H270 V2

灯具实物照片



配光曲线

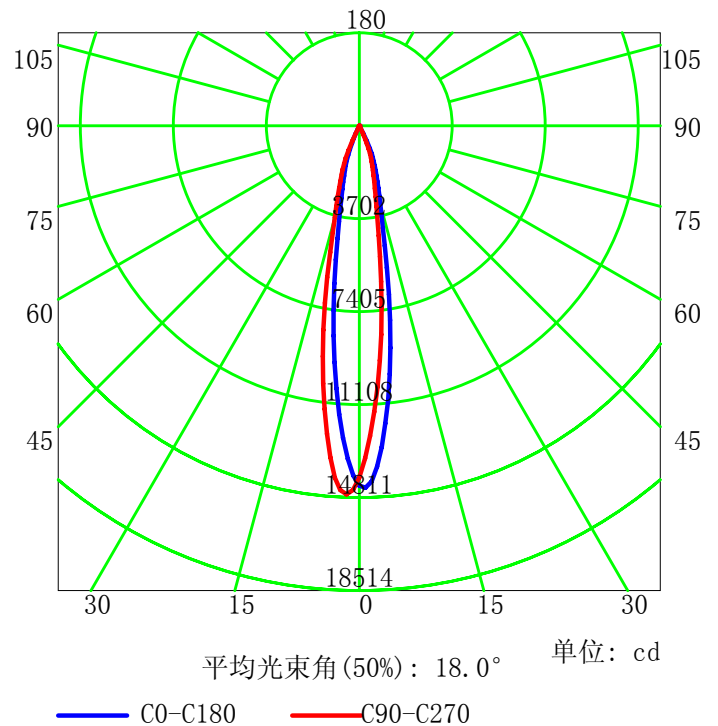

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0



测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

配光曲线

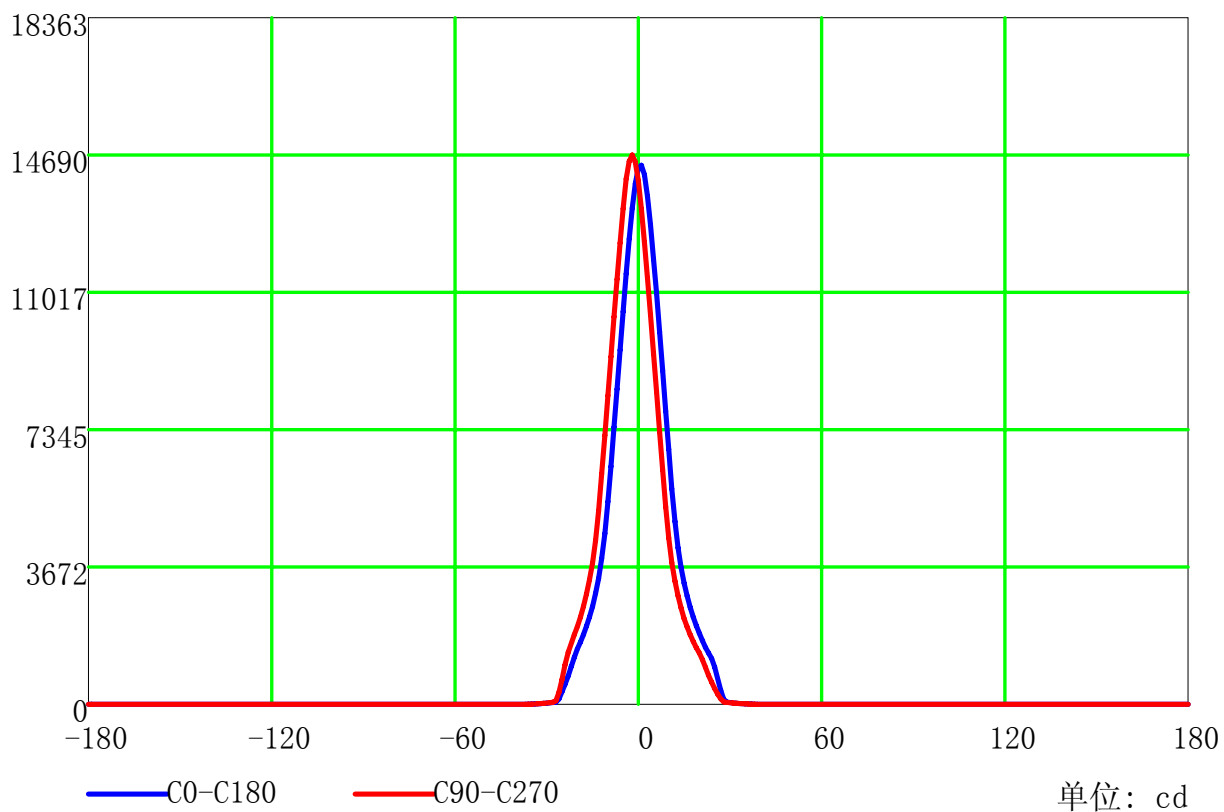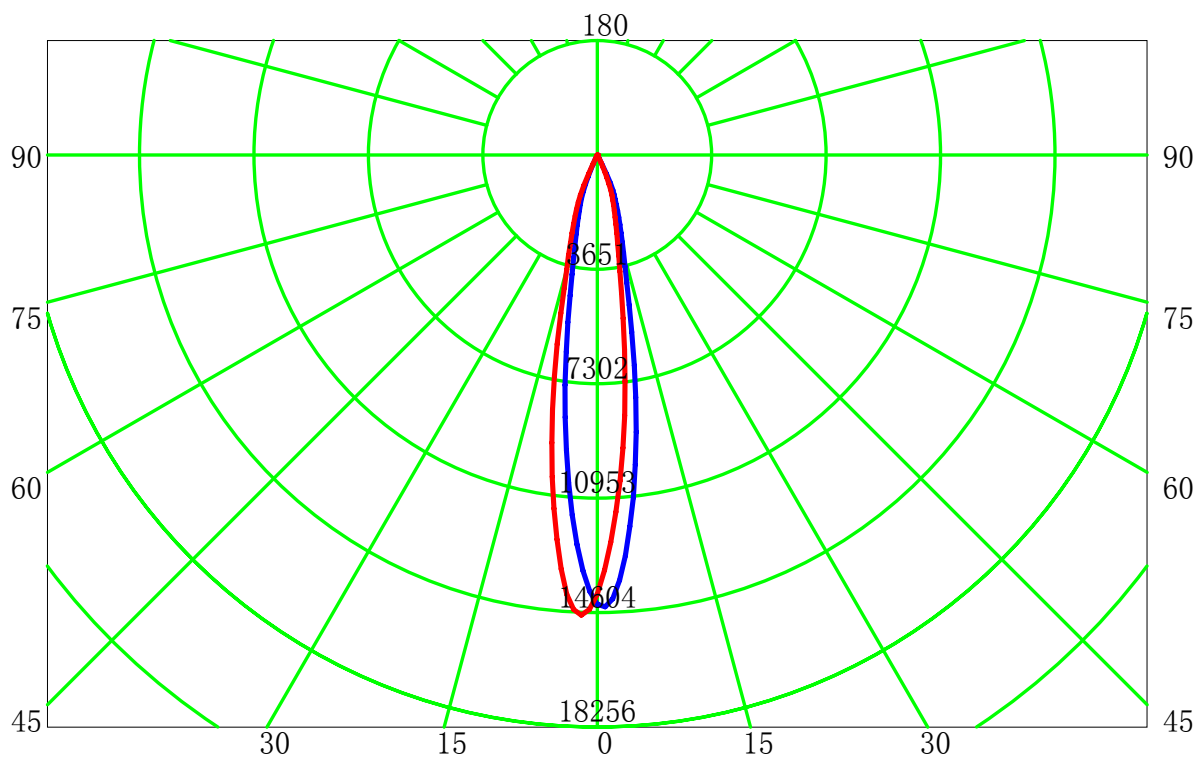

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

配光曲线(cd/klm)

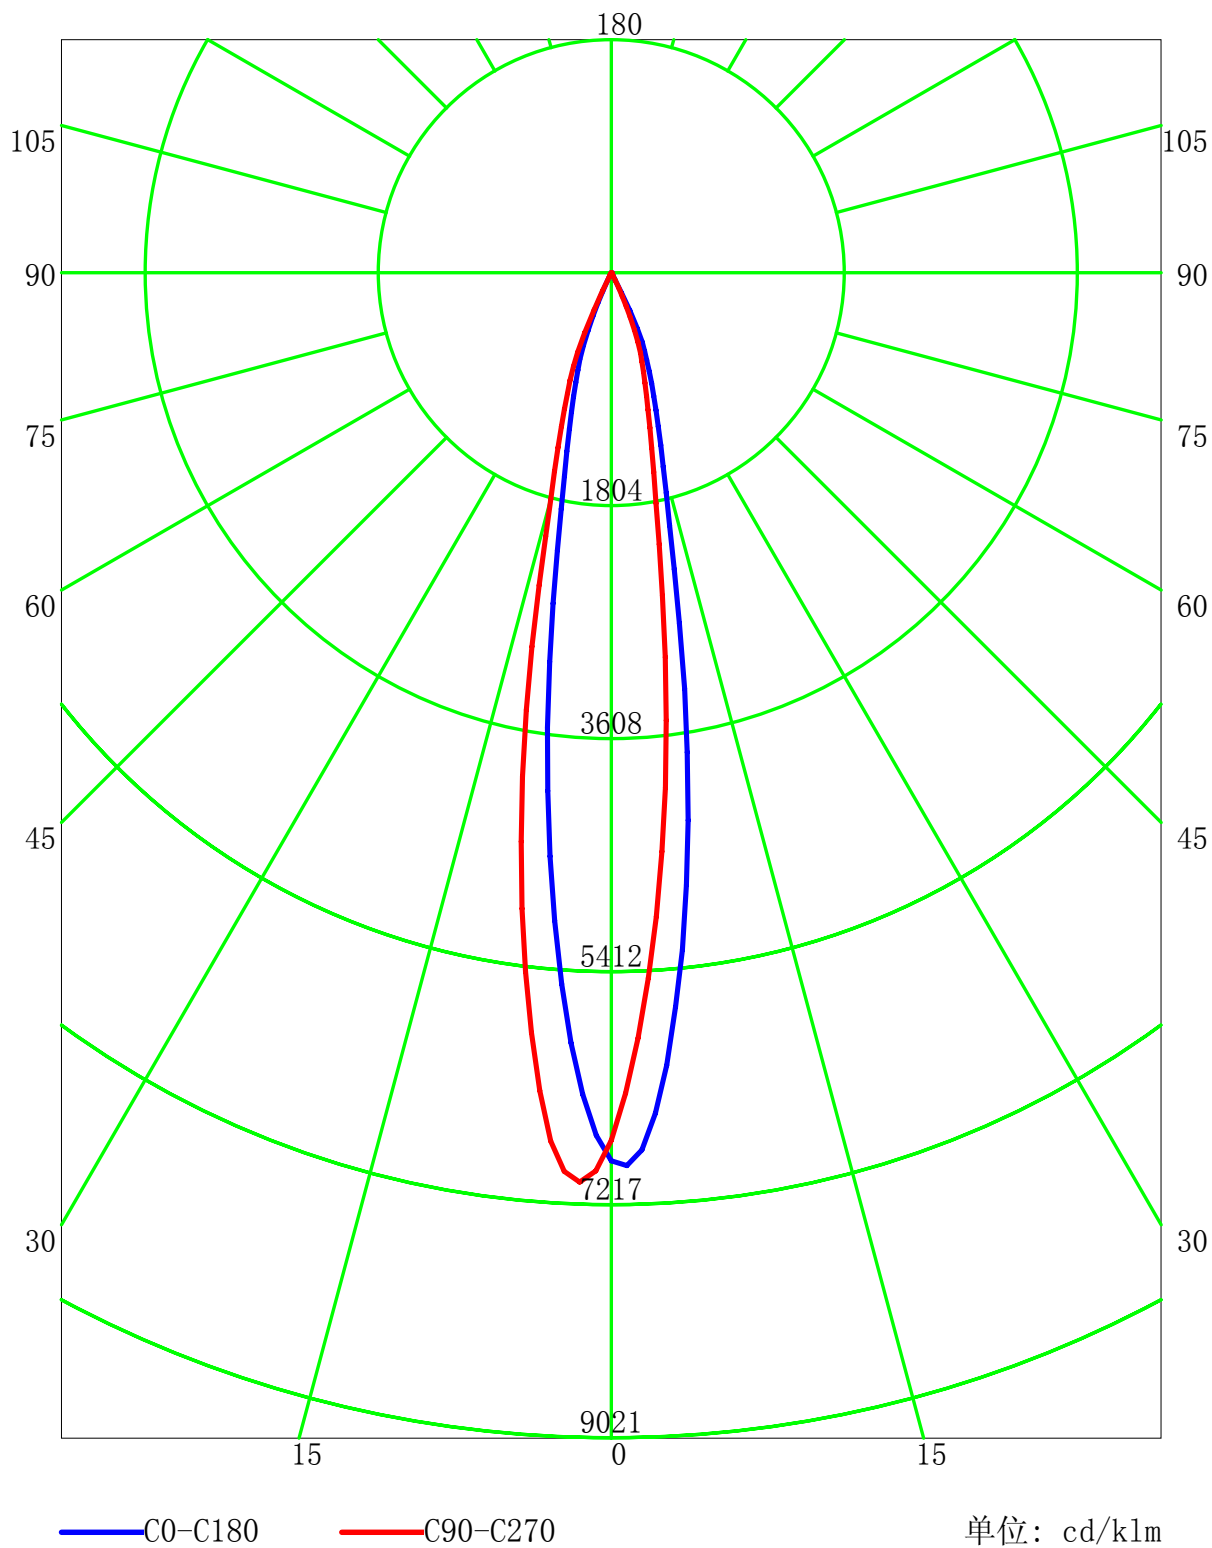

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

室内灯具利用系数表


RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97
2	112	109	106	104	110	107	105	102	104	102	100	101	100	98	98	97	96	95
3	109	105	101	99	107	103	100	98	101	98	96	99	97	95	97	95	94	92
4	106	101	97	95	104	100	97	94	98	95	93	96	94	92	95	93	91	90
5	103	98	94	91	102	97	94	91	96	93	90	94	92	90	93	91	89	88
6	101	95	91	89	100	94	91	88	93	90	88	92	89	87	91	89	87	86
7	98	92	89	86	97	92	88	86	91	88	85	90	87	85	89	87	85	84
8	96	90	86	84	95	90	86	84	89	86	83	88	85	83	87	85	83	82
9	94	88	84	82	93	88	84	82	87	84	81	86	83	81	85	83	81	80
10	92	86	82	80	91	86	82	80	85	82	80	84	81	79	84	81	79	78

最大允许安装距离高度比(横向): 0.31

最大允许安装距离高度比(纵向): 0.32

最大允许安装距离高度比(对角): 0.33

灯具概算曲线

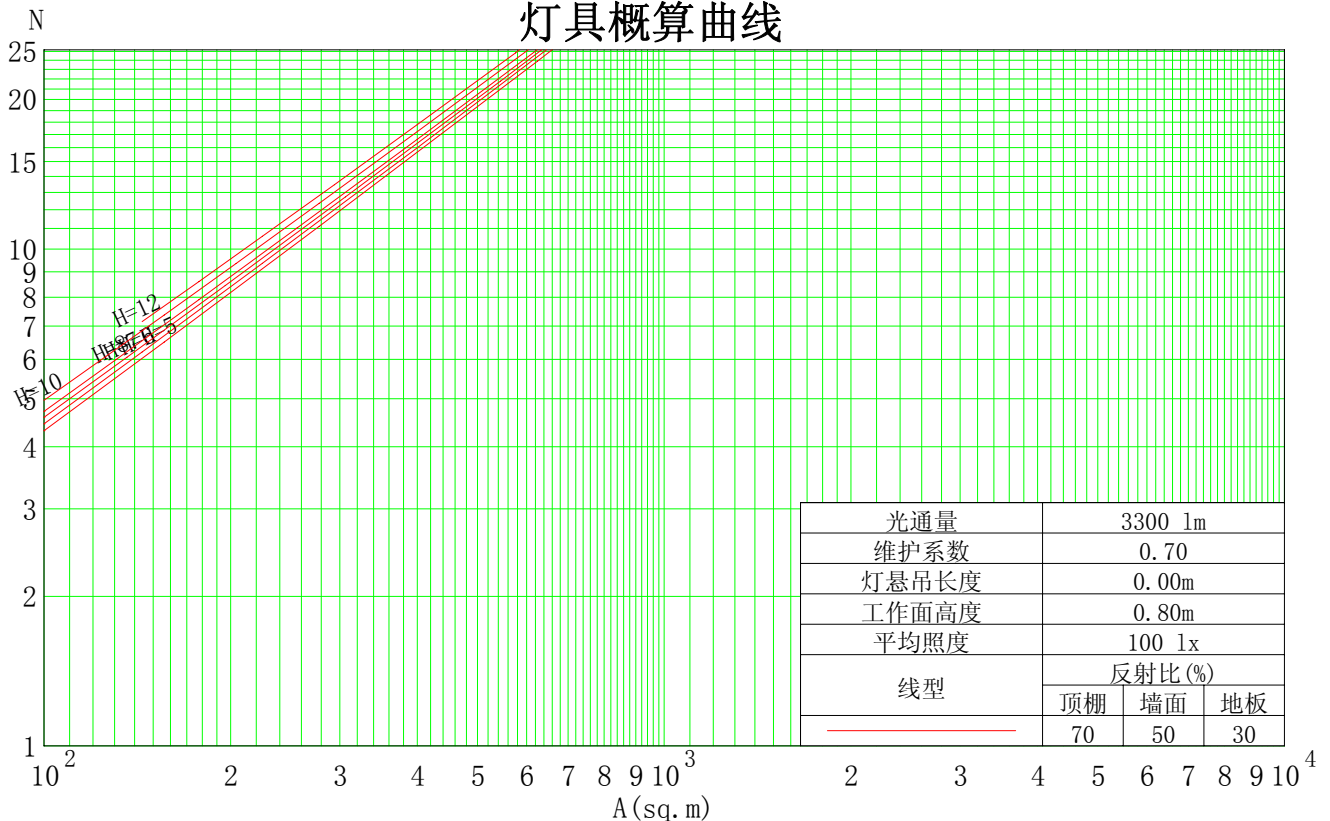

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

水平面等照度曲线

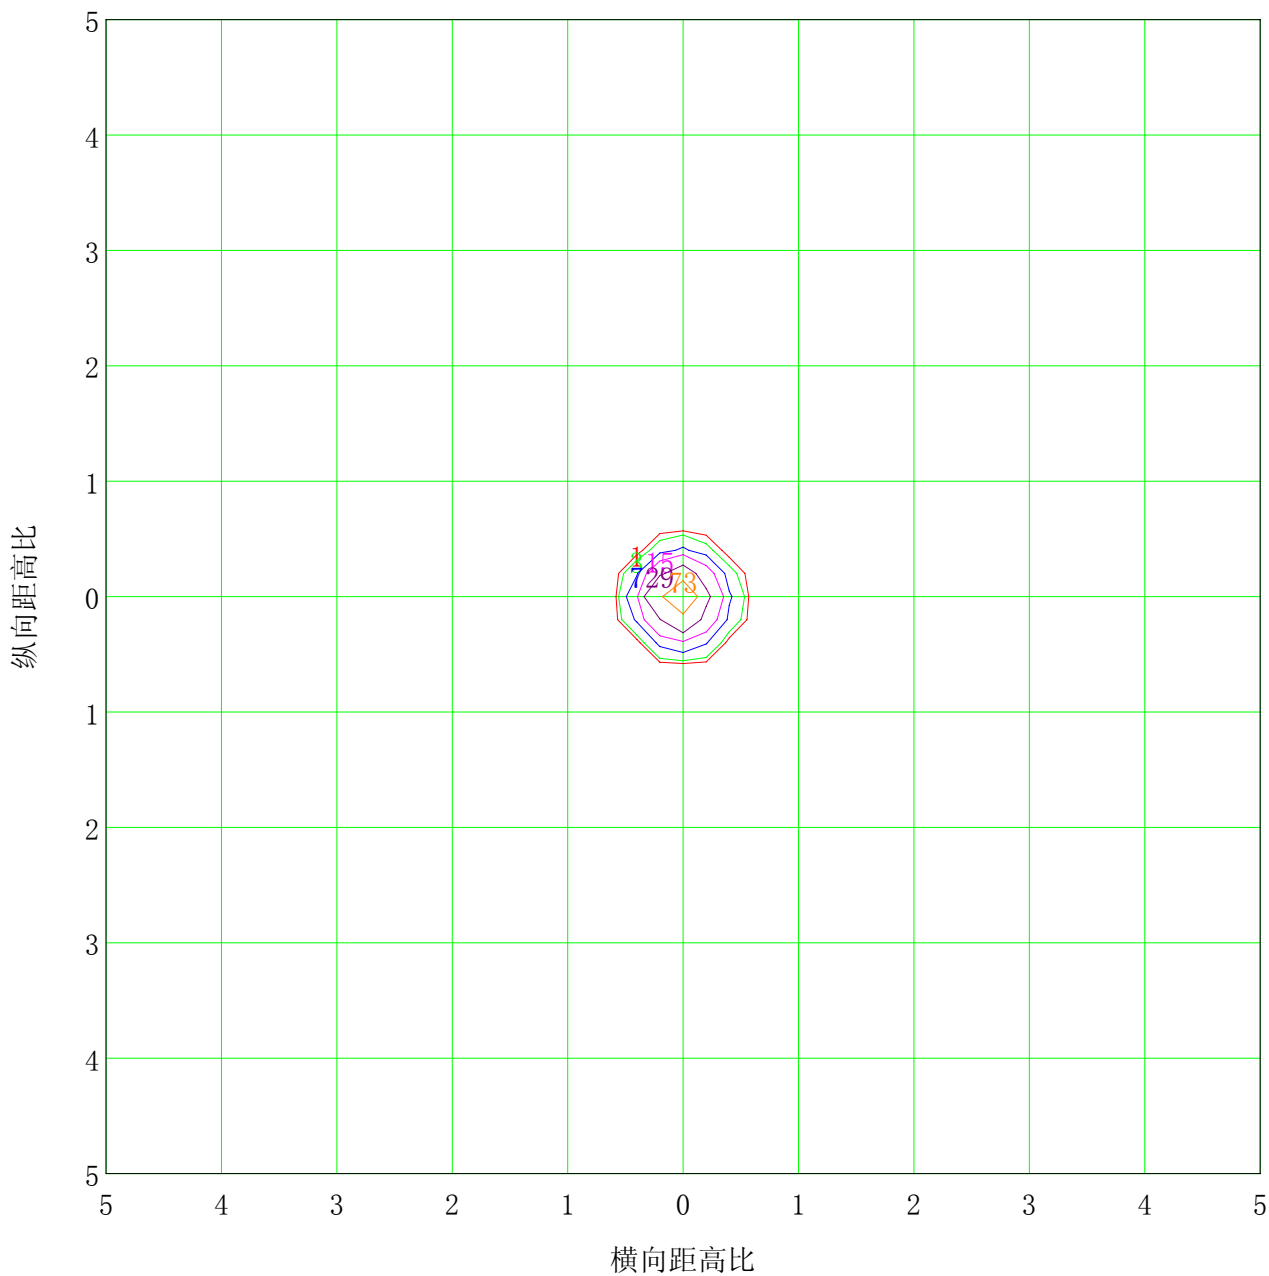

安装高度: 10m

最大照度值(100%): 147 lx

(1%): 1 lx
(5%): 7 lx
(20%): 29 lx
(100%): 147 lx

(2%): 3 lx
(10%): 15 lx
(50%): 73 lx

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m



环境湿度:

核 验:

亮度限制曲线

眩光评价价值	质量等级	使用照度 / lx							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

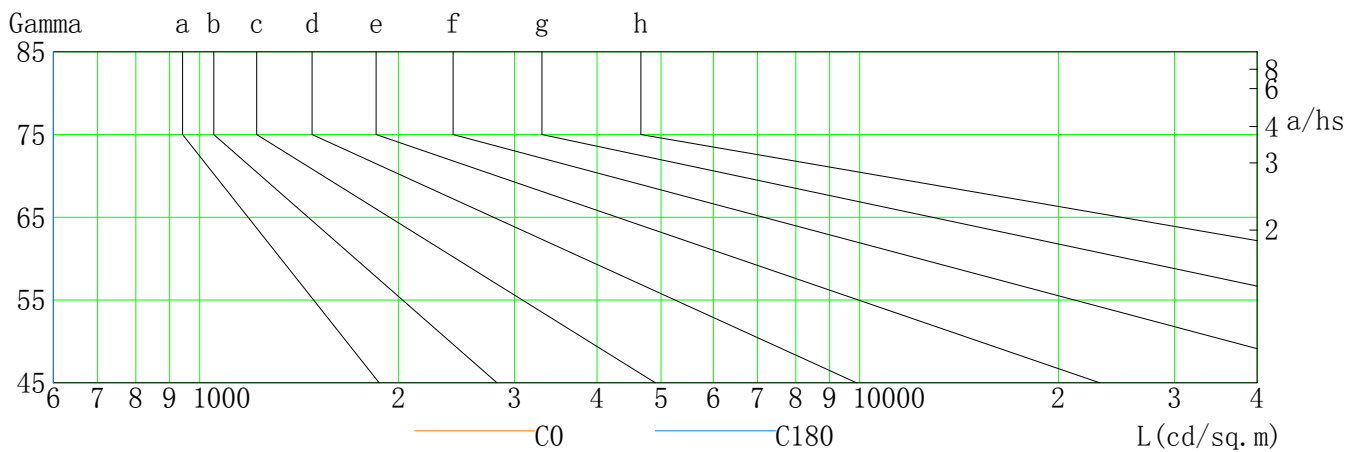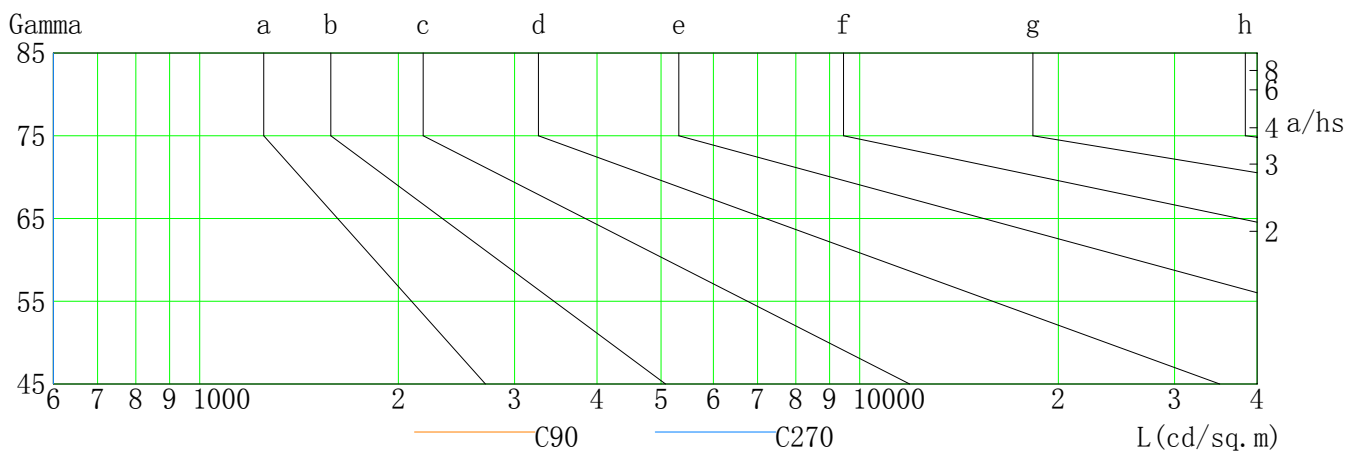

L (cd/sq. m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	0	0	0	0	0	0	0	0	0
C90	0	0	0	0	0	0	0	0	0
C180	0	0	0	0	0	0	0	0	0
C270	0	0	0	0	0	0	0	0	0

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

照度距离关系图

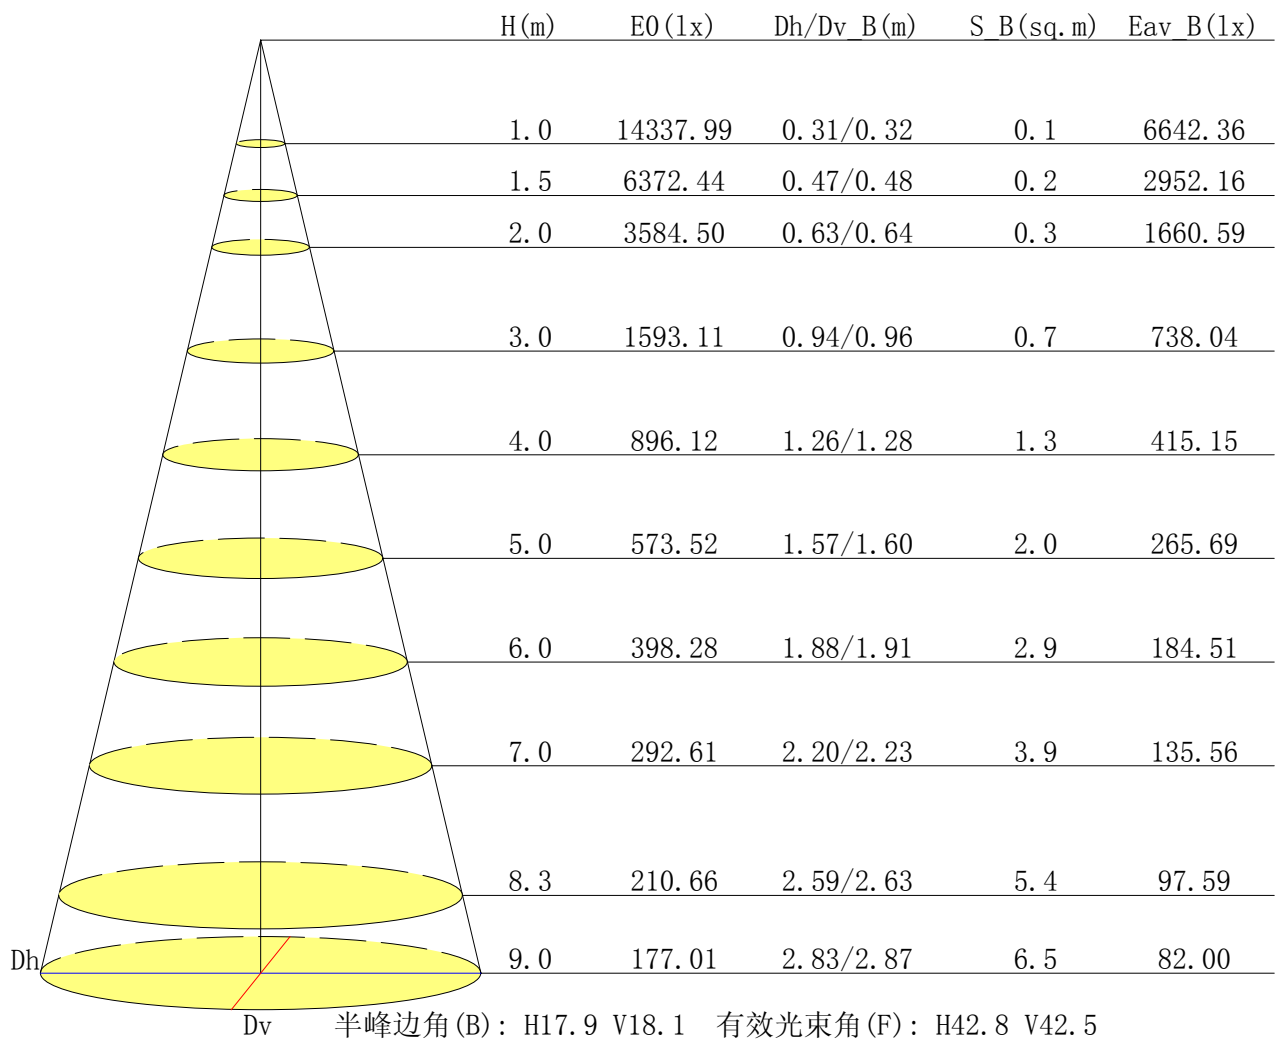

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

垂直面等照度曲线

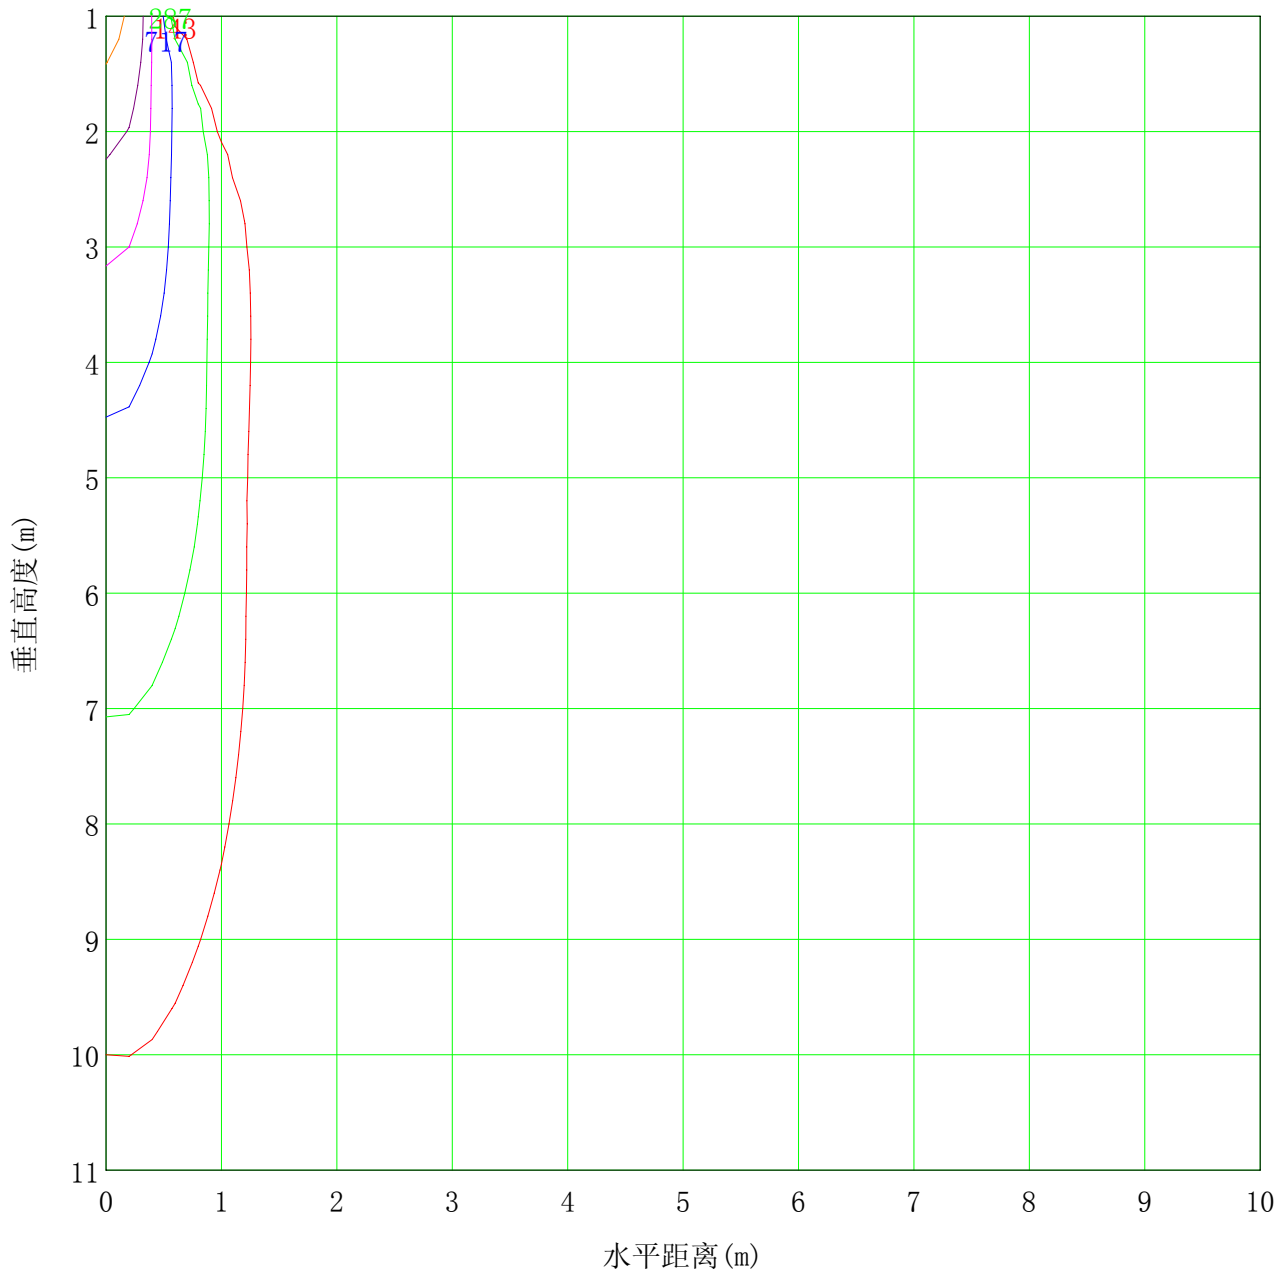

最低高度(米): 1m	最大高度(米): 11	最大照度值: 14338
— (1%): 143 lx	— (2%): 287 lx	
— (5%): 717 lx	— (10%): 1434 lx	
— (20%): 2868 lx	— (50%): 7169 lx	
— (100%): 14338 lx		

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

灯具有效平均照度图

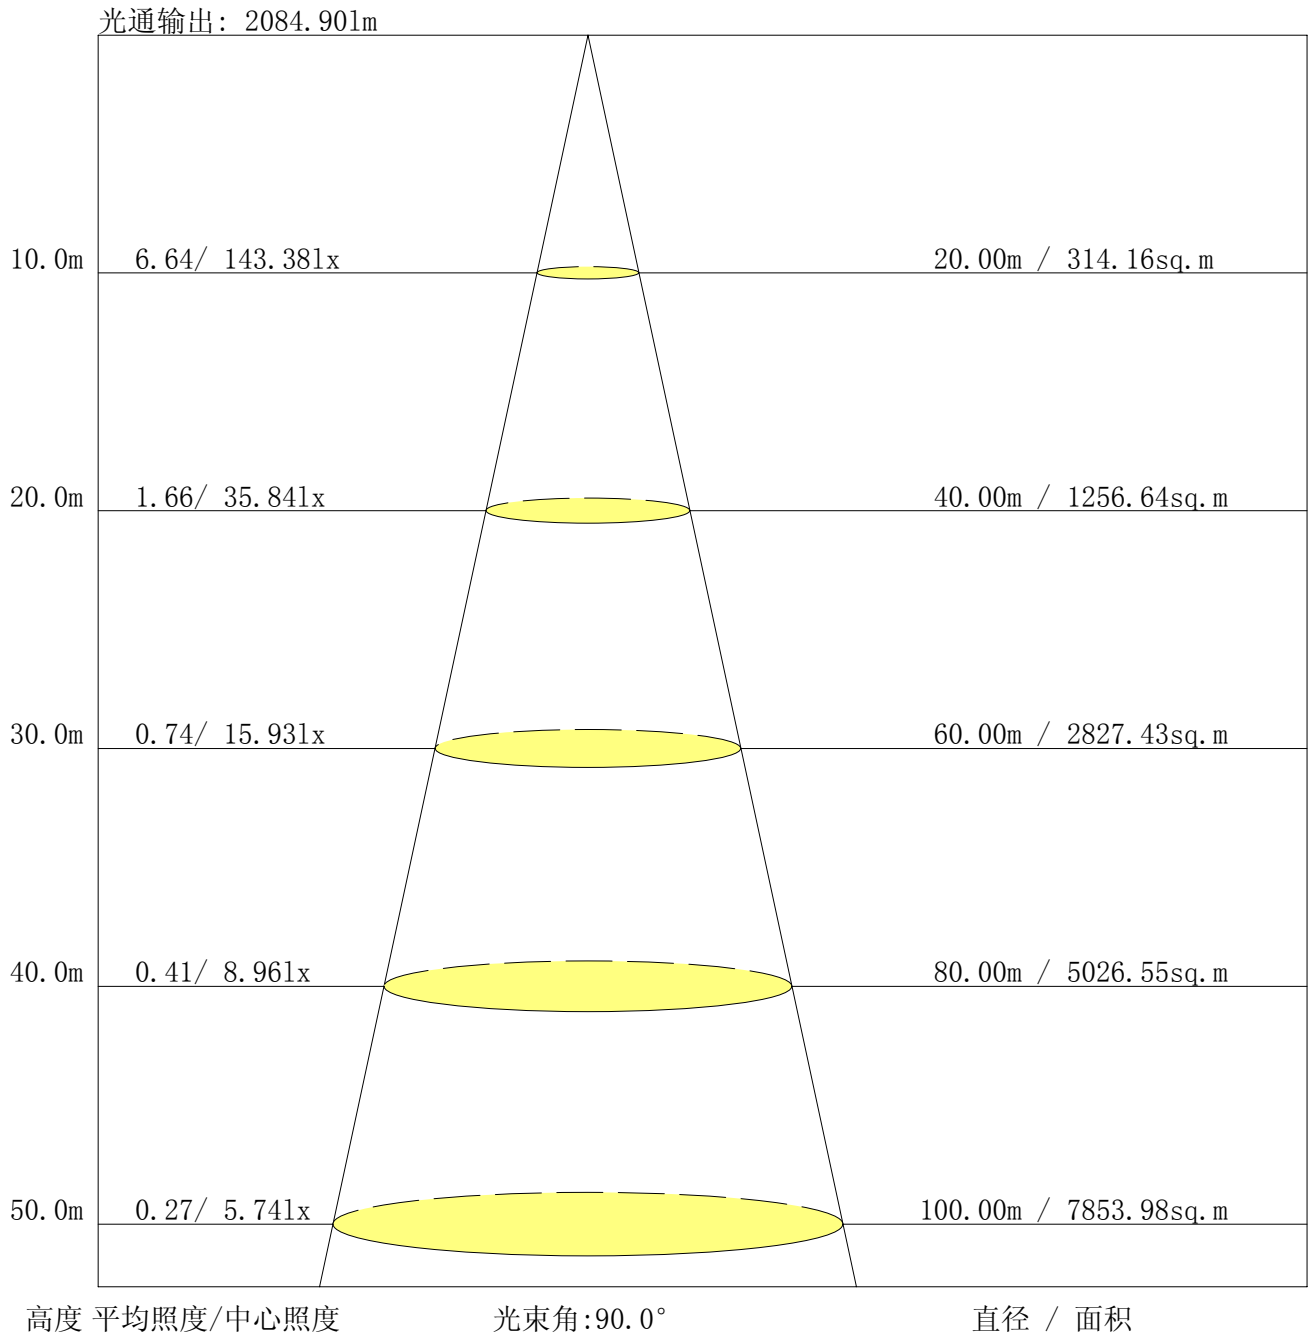

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



光强分布数据表格

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G0.0	14338.0	14007.6	14338.0	14007.6	14338.0					
G1.0	14418.3	13250.0	13928.3	14503.5	14418.3					
G2.0	14172.0	12363.9	13271.6	14690.6	14172.0					
G3.0	13591.5	11407.0	12450.0	14527.3	13591.5					
G4.0	12826.5	10422.5	11514.8	14053.0	12826.5					
G5.0	11901.3	9382.1	10503.4	13257.9	11901.3					
G6.0	10993.5	8359.6	9474.1	12336.9	10993.5					
G7.0	9959.4	7282.1	8430.4	11368.9	9959.4					
G8.0	8927.4	6267.1	7414.3	10366.0	8927.4					
G9.0	7837.8	5278.4	6361.2	9298.5	7837.8					
G10.0	6822.2	4451.5	5422.2	8259.2	6822.2					
G11.0	5762.7	3790.7	4568.9	7192.3	5762.7					
G12.0	4891.9	3293.2	3899.6	6171.9	4891.9					
G13.0	4190.4	2905.7	3373.0	5180.1	4190.4					
G14.0	3663.8	2580.5	2973.3	4387.0	3663.8					
G15.0	3243.5	2292.9	2615.9	3783.3	3243.5					
G16.0	2899.9	2071.4	2339.4	3335.0	2899.9					
G17.0	2595.3	1863.6	2090.4	2950.6	2595.3					
G18.0	2336.3	1686.0	1863.6	2615.4	2336.3					
G19.0	2106.8	1519.4	1664.8	2328.3	2106.8					
G20.0	1903.8	1375.1	1483.0	2077.2	1903.8					
G21.0	1709.8	1199.1	1257.8	1862.0	1709.8					
G22.0	1524.7	995.0	1013.0	1629.4	1524.7					
G23.0	1379.3	781.9	760.8	1393.1	1379.3					
G24.0	1226.0	594.8	535.6	1060.6	1226.0					
G25.0	993.4	419.8	334.1	659.3	993.4					
G26.0	684.1	271.2	141.7	319.3	684.1					
G27.0	368.5	149.1	59.7	96.2	368.5					
G28.0	130.6	66.6	48.1	57.6	130.6					
G29.0	60.8	53.9	39.7	44.9	60.8					
G30.0	48.1	45.5	32.3	37.5	48.1					
G31.0	40.2	36.5	26.4	29.1	40.2					
G32.0	31.7	30.1	19.6	22.2	31.7					
G33.0	25.4	23.8	15.3	16.4	25.4					
G34.0	19.6	19.6	11.6	11.6	19.6					
G35.0	15.3	15.9	9.0	8.5	15.3					
G36.0	12.2	12.7	6.3	5.8	12.2					

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



光强分布数据表格 (续 1)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G37.0	9.5	8.5	1.6	3.2	9.5					
G38.0	5.8	4.8	0.0	0.0	5.8					
G39.0	2.6	1.6	0.0	0.0	2.6					
G40.0	0.0	0.0	0.0	0.0	0.0					
G41.0	0.0	0.0	0.0	0.0	0.0					
G42.0	0.0	0.0	0.0	0.0	0.0					
G43.0	0.0	0.0	0.0	0.0	0.0					
G44.0	0.0	0.0	0.0	0.0	0.0					
G45.0	0.0	0.0	0.0	0.0	0.0					
G46.0	0.0	0.0	0.0	0.0	0.0					
G47.0	0.0	0.0	0.0	0.0	0.0					
G48.0	0.0	0.0	0.0	0.0	0.0					
G49.0	0.0	0.0	0.0	0.0	0.0					
G50.0	0.0	0.0	0.0	0.0	0.0					
G51.0	0.0	0.0	0.0	0.0	0.0					
G52.0	0.0	0.0	0.0	0.0	0.0					
G53.0	0.0	0.0	0.0	0.0	0.0					
G54.0	0.0	0.0	0.0	0.0	0.0					
G55.0	0.0	0.0	0.0	0.0	0.0					
G56.0	0.0	0.0	0.0	0.0	0.0					
G57.0	0.0	0.0	0.0	0.0	0.0					
G58.0	0.0	0.0	0.0	0.0	0.0					
G59.0	0.0	0.0	0.0	0.0	0.0					
G60.0	0.0	0.0	0.0	0.0	0.0					
G61.0	0.0	0.0	0.0	0.0	0.0					
G62.0	0.0	0.0	0.0	0.0	0.0					
G63.0	0.0	0.0	0.0	0.0	0.0					
G64.0	0.0	0.0	0.0	0.0	0.0					
G65.0	0.0	0.0	0.0	0.0	0.0					
G66.0	0.0	0.0	0.0	0.0	0.0					
G67.0	0.0	0.0	0.0	0.0	0.0					
G68.0	0.0	0.0	0.0	0.0	0.0					
G69.0	0.0	0.0	0.0	0.0	0.0					
G70.0	0.0	0.0	0.0	0.0	0.0					
G71.0	0.0	0.0	0.0	0.0	0.0					
G72.0	0.0	0.0	0.0	0.0	0.0					
G73.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



光强分布数据表格 (续 2)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G74.0	0.0	0.0	0.0	0.0	0.0					
G75.0	0.0	0.0	0.0	0.0	0.0					
G76.0	0.0	0.0	0.0	0.0	0.0					
G77.0	0.0	0.0	0.0	0.0	0.0					
G78.0	0.0	0.0	0.0	0.0	0.0					
G79.0	0.0	0.0	0.0	0.0	0.0					
G80.0	0.0	0.0	0.0	0.0	0.0					
G81.0	0.0	0.0	0.0	0.0	0.0					
G82.0	0.0	0.0	0.0	0.0	0.0					
G83.0	0.0	0.0	0.0	0.0	0.0					
G84.0	0.0	0.0	0.0	0.0	0.0					
G85.0	0.0	0.0	0.0	0.0	0.0					
G86.0	0.0	0.0	0.0	0.0	0.0					
G87.0	0.0	0.0	0.0	0.0	0.0					
G88.0	0.0	0.0	0.0	0.0	0.0					
G89.0	0.0	0.0	0.0	0.0	0.0					
G90.0	0.0	0.0	0.0	0.0	0.0					
G91.0	0.0	0.0	0.0	0.0	0.0					
G92.0	0.0	0.0	0.0	0.0	0.0					
G93.0	0.0	0.0	0.0	0.0	0.0					
G94.0	0.0	0.0	0.0	0.0	0.0					
G95.0	0.0	0.0	0.0	0.0	0.0					
G96.0	0.0	0.0	0.0	0.0	0.0					
G97.0	0.0	0.0	0.0	0.0	0.0					
G98.0	0.0	0.0	0.0	0.0	0.0					
G99.0	0.0	0.0	0.0	0.0	0.0					
G100.0	0.0	0.0	0.0	0.0	0.0					
G101.0	0.0	0.0	0.0	0.0	0.0					
G102.0	0.0	0.0	0.0	0.0	0.0					
G103.0	0.0	0.0	0.0	0.0	0.0					
G104.0	0.0	0.0	0.0	0.0	0.0					
G105.0	0.0	0.0	0.0	0.0	0.0					
G106.0	0.0	0.0	0.0	0.0	0.0					
G107.0	0.0	0.0	0.0	0.0	0.0					
G108.0	0.0	0.0	0.0	0.0	0.0					
G109.0	0.0	0.0	0.0	0.0	0.0					
G110.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



光强分布数据表格 (续 3)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G111.0	0.0	0.0	0.0	0.0	0.0					
G112.0	0.0	0.0	0.0	0.0	0.0					
G113.0	0.0	0.0	0.0	0.0	0.0					
G114.0	0.0	0.0	0.0	0.0	0.0					
G115.0	0.0	0.0	0.0	0.0	0.0					
G116.0	0.0	0.0	0.0	0.0	0.0					
G117.0	0.0	0.0	0.0	0.0	0.0					
G118.0	0.0	0.0	0.0	0.0	0.0					
G119.0	0.0	0.0	0.0	0.0	0.0					
G120.0	0.0	0.0	0.0	0.0	0.0					
G121.0	0.0	0.0	0.0	0.0	0.0					
G122.0	0.0	0.0	0.0	0.0	0.0					
G123.0	0.0	0.0	0.0	0.0	0.0					
G124.0	0.0	0.0	0.0	0.0	0.0					
G125.0	0.0	0.0	0.0	0.0	0.0					
G126.0	0.0	0.0	0.0	0.0	0.0					
G127.0	0.0	0.0	0.0	0.0	0.0					
G128.0	0.0	0.0	0.0	0.0	0.0					
G129.0	0.0	0.0	0.0	0.0	0.0					
G130.0	0.0	0.0	0.0	0.0	0.0					
G131.0	0.0	0.0	0.0	0.0	0.0					
G132.0	0.0	0.0	0.0	0.0	0.0					
G133.0	0.0	0.0	0.0	0.0	0.0					
G134.0	0.0	0.0	0.0	0.0	0.0					
G135.0	0.0	0.0	0.0	0.0	0.0					
G136.0	0.0	0.0	0.0	0.0	0.0					
G137.0	0.0	0.0	0.0	0.0	0.0					
G138.0	0.0	0.0	0.0	0.0	0.0					
G139.0	0.0	0.0	0.0	0.0	0.0					
G140.0	0.0	0.0	0.0	0.0	0.0					
G141.0	0.0	0.0	0.0	0.0	0.0					
G142.0	0.0	0.0	0.0	0.0	0.0					
G143.0	0.0	0.0	0.0	0.0	0.0					
G144.0	0.0	0.0	0.0	0.0	0.0					
G145.0	0.0	0.0	0.0	0.0	0.0					
G146.0	0.0	0.0	0.0	0.0	0.0					
G147.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



光强分布数据表格 (续 4)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G148.0	0.0	0.0	0.0	0.0	0.0					
G149.0	0.0	0.0	0.0	0.0	0.0					
G150.0	0.0	0.0	0.0	0.0	0.0					
G151.0	0.0	0.0	0.0	0.0	0.0					
G152.0	0.0	0.0	0.0	0.0	0.0					
G153.0	0.0	0.0	0.0	0.0	0.0					
G154.0	0.0	0.0	0.0	0.0	0.0					
G155.0	0.0	0.0	0.0	0.0	0.0					
G156.0	0.0	0.0	0.0	0.0	0.0					
G157.0	0.0	0.0	0.0	0.0	0.0					
G158.0	0.0	0.0	0.0	0.0	0.0					
G159.0	0.0	0.0	0.0	0.0	0.0					
G160.0	0.0	0.0	0.0	0.0	0.0					
G161.0	0.0	0.0	0.0	0.0	0.0					
G162.0	0.0	0.0	0.0	0.0	0.0					
G163.0	0.0	0.0	0.0	0.0	0.0					
G164.0	0.0	0.0	0.0	0.0	0.0					
G165.0	0.0	0.0	0.0	0.0	0.0					
G166.0	0.0	0.0	0.0	0.0	0.0					
G167.0	0.0	0.0	0.0	0.0	0.0					
G168.0	0.0	0.0	0.0	0.0	0.0					
G169.0	0.0	0.0	0.0	0.0	0.0					
G170.0	0.0	0.0	0.0	0.0	0.0					
G171.0	0.0	0.0	0.0	0.0	0.0					
G172.0	0.0	0.0	0.0	0.0	0.0					
G173.0	0.0	0.0	0.0	0.0	0.0					
G174.0	0.0	0.0	0.0	0.0	0.0					
G175.0	0.0	0.0	0.0	0.0	0.0					
G176.0	0.0	0.0	0.0	0.0	0.0					
G177.0	0.0	0.0	0.0	0.0	0.0					
G178.0	0.0	0.0	0.0	0.0	0.0					
G179.0	0.0	0.0	0.0	0.0	0.0					
G180.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验: