

报告编号:

测试时间: 2019-06-08 13:39

产品特征

灯具制造厂商:

灯具型号: XQ613035.02W-D15

电压: 221.5 V

功率: 36.70 W

光源个数: 1

电流: 0.171 A

功率因数: 0.969

光度结果

灯具CIE分类: 直接型

灯具光通量: 2168.7 lm

下射光通量比: 100%

额定光通量: 2168.7 lm

灯具效率: 100%

上射光通量比: 0%

水平扩散角 (25%, 50%, 75%, 100%): H26.5, H17.7, H10.7, H1

垂直扩散角 (25%, 50%, 75%, 100%): V26.6, V17.9, V10.9, V1

灯具光效等级 (LER): 59

峰值光强: 15245.22 cd


中心光强: 15201.34 cd

峰值光强位置: H0 V1

灯具实物照片



配光曲线

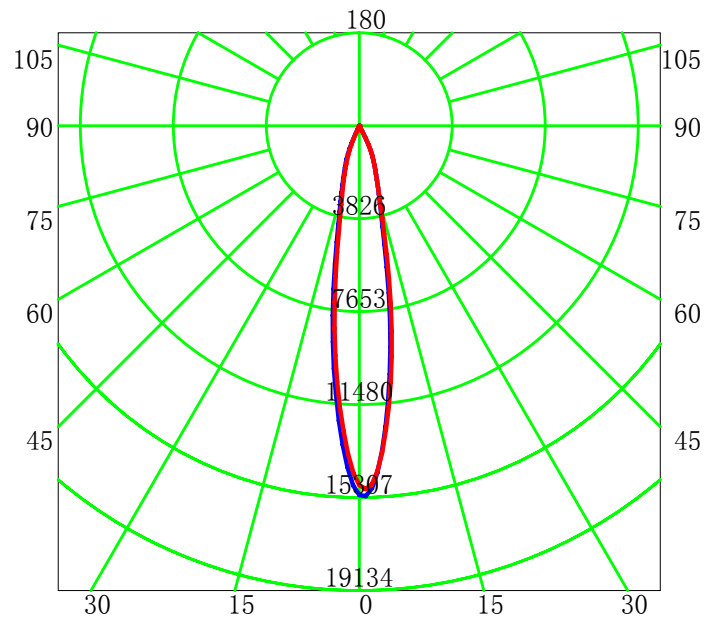

平均光束角 (50%): 17.8° 单位: cd

— C0-C180 — C90-C270

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0



测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

配光曲线

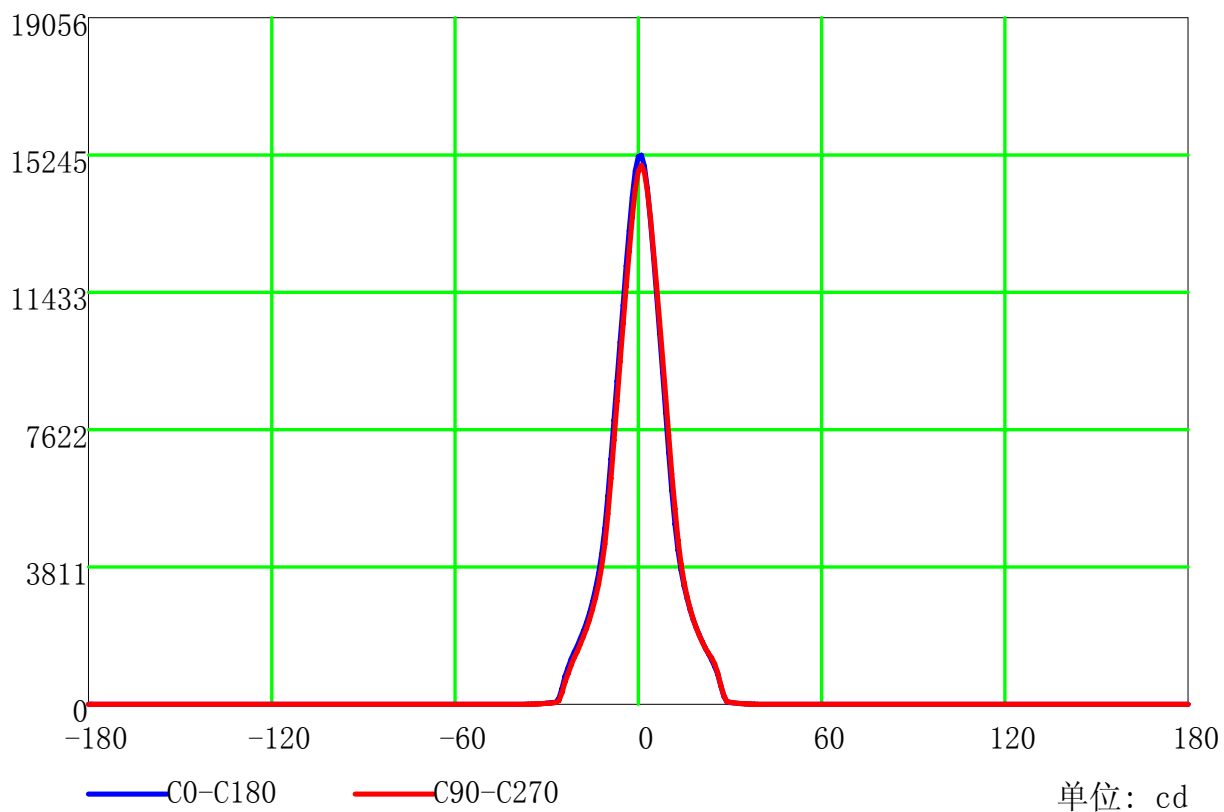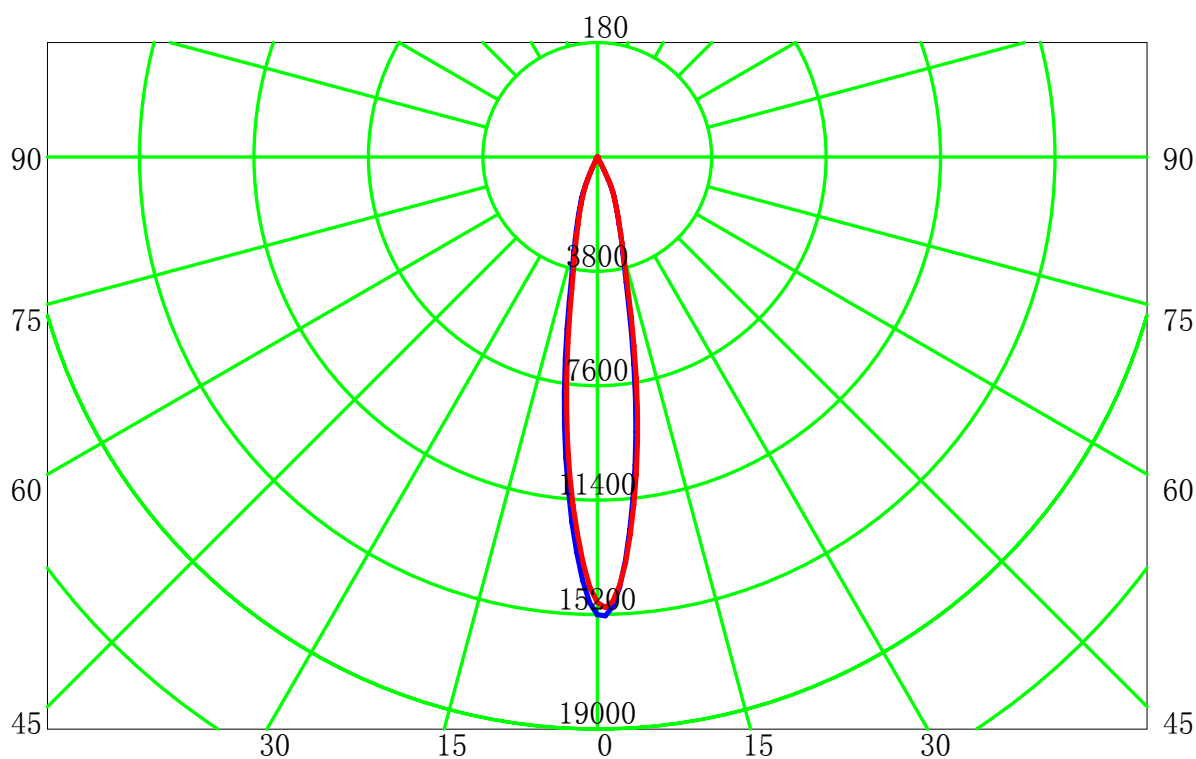

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

配光曲线(cd/klm)

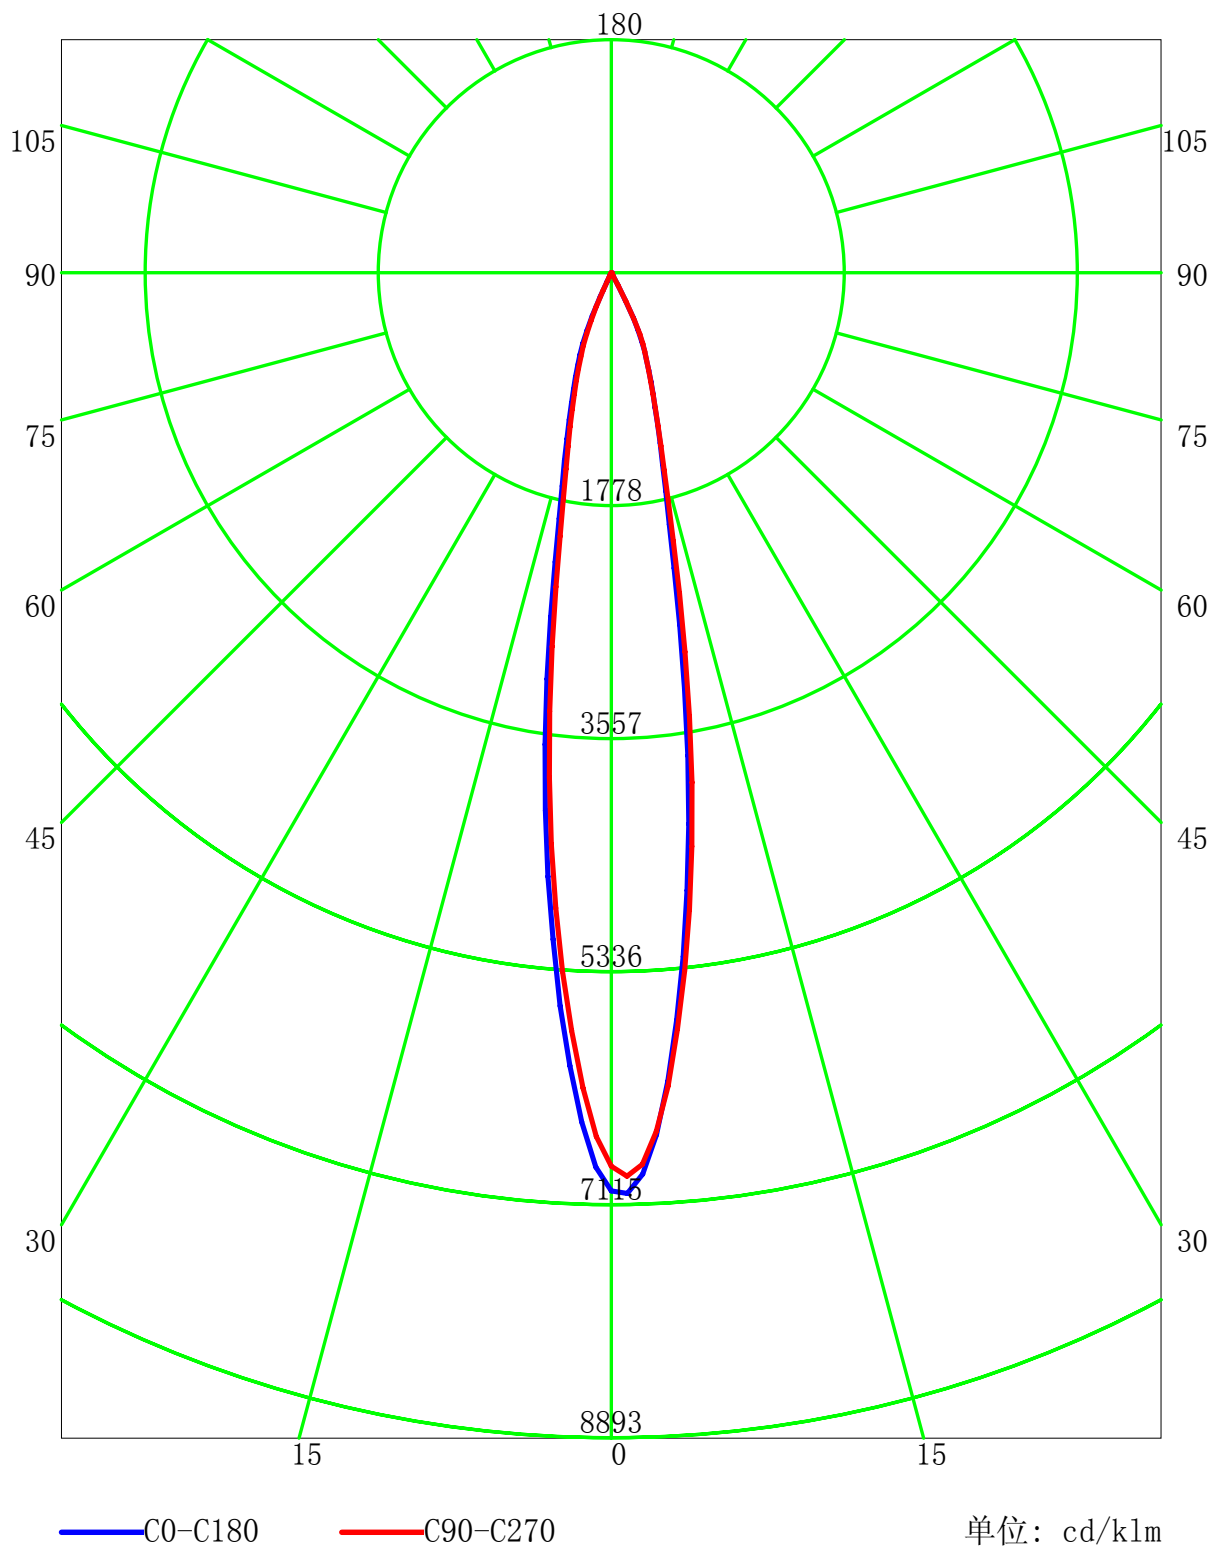

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

室内灯具利用系数表


RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97
2	112	109	106	104	110	107	104	102	104	102	100	101	99	98	98	97	96	95
3	109	105	101	99	107	103	100	98	101	98	96	99	97	95	96	95	93	92
4	106	101	97	95	104	100	97	94	98	95	93	96	94	92	95	93	91	90
5	103	98	94	91	102	97	93	91	95	92	90	94	91	89	93	90	89	88
6	101	95	91	88	99	94	91	88	93	90	88	92	89	87	91	88	87	86
7	98	92	89	86	97	92	88	86	91	88	85	90	87	85	89	86	84	84
8	96	90	86	84	95	89	86	83	89	85	83	88	85	83	87	84	83	82
9	94	88	84	82	93	87	84	81	87	83	81	86	83	81	85	83	81	80
10	92	86	82	80	91	85	82	80	85	81	79	84	81	79	83	81	79	78

最大允许安装距离高度比(横向): 0.30

最大允许安装距离高度比(纵向): 0.31

最大允许安装距离高度比(对角): 0.32

灯具概算曲线

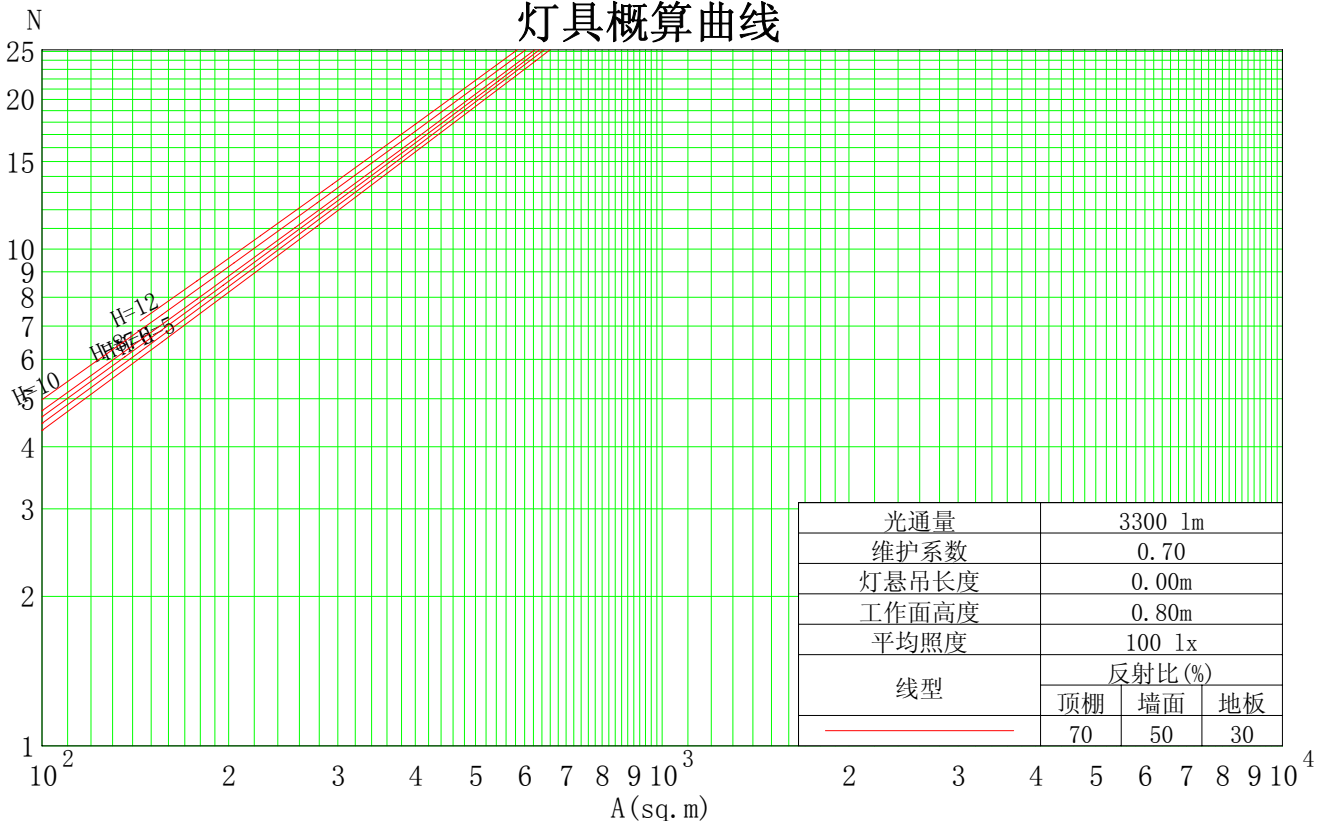

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

水平面等照度曲线

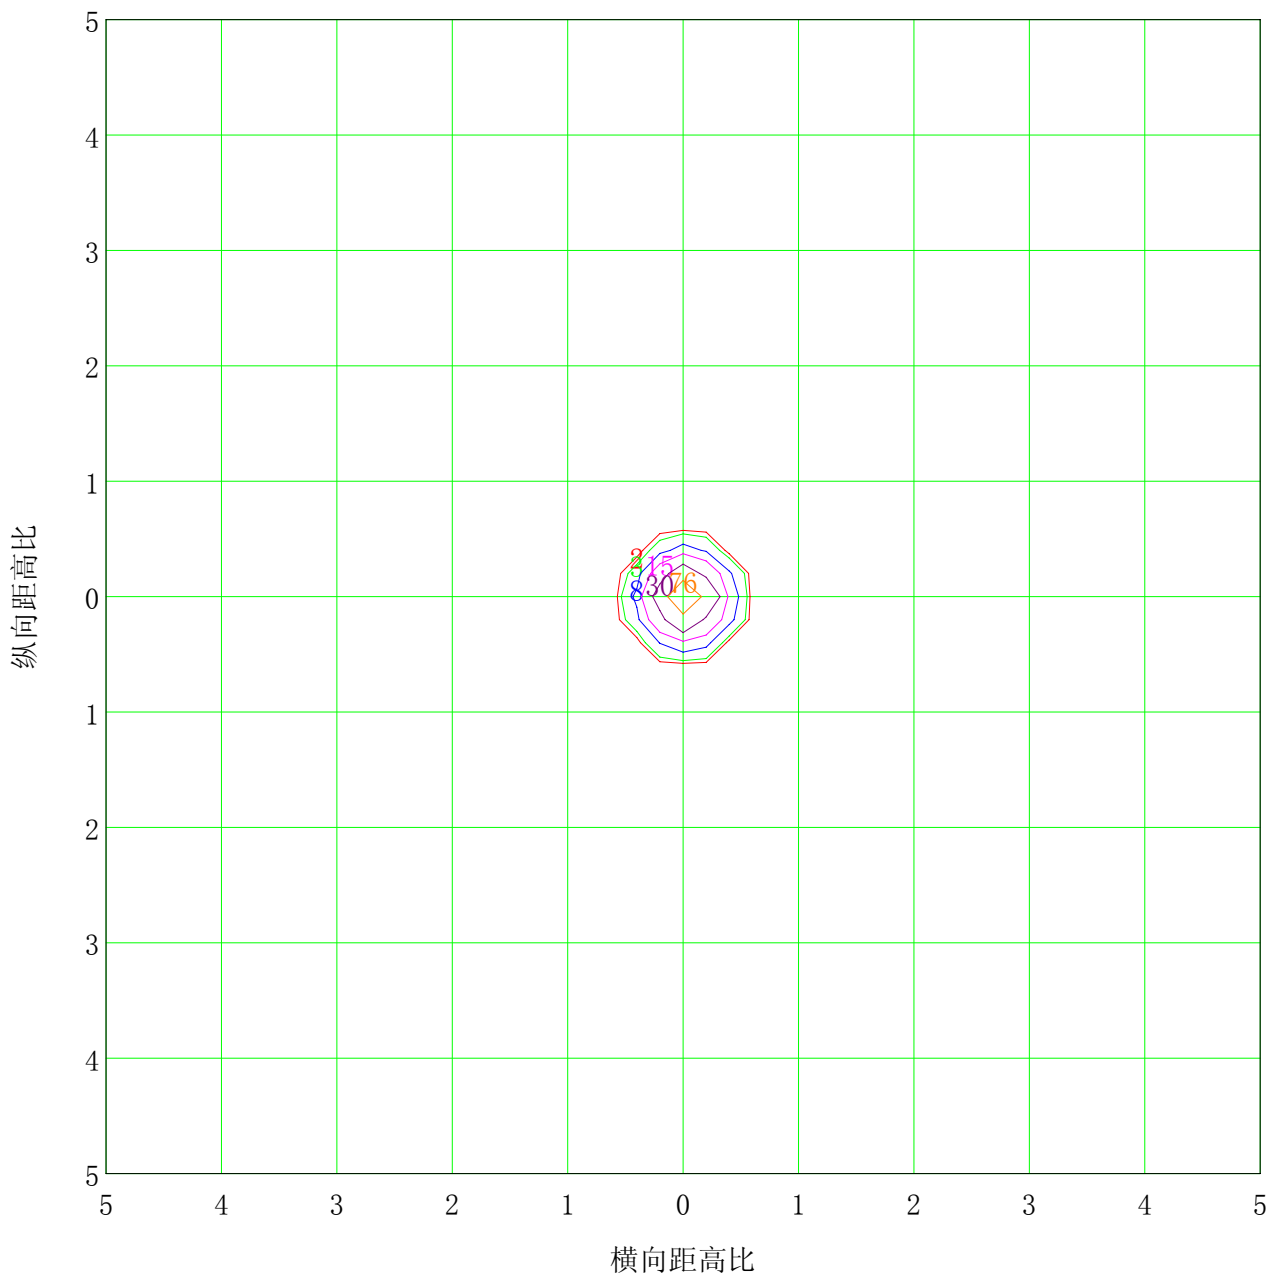

安装高度: 10m		最大照度值(100%): 152 lx	
— (1%):	2 lx	— (2%):	3 lx
— (5%):	8 lx	— (10%):	15 lx
— (20%):	30 lx	— (50%):	76 lx
— (100%):	152 lx		

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m



环境湿度:

核 验:

亮度限制曲线

眩光评价价值	质量等级	使用照度 / lx							
		2000	1000	500	≤300				
1.15	A								
1.50	B								
1.85	C								
2.20	D								
2.55	E								

a b c d e f g h

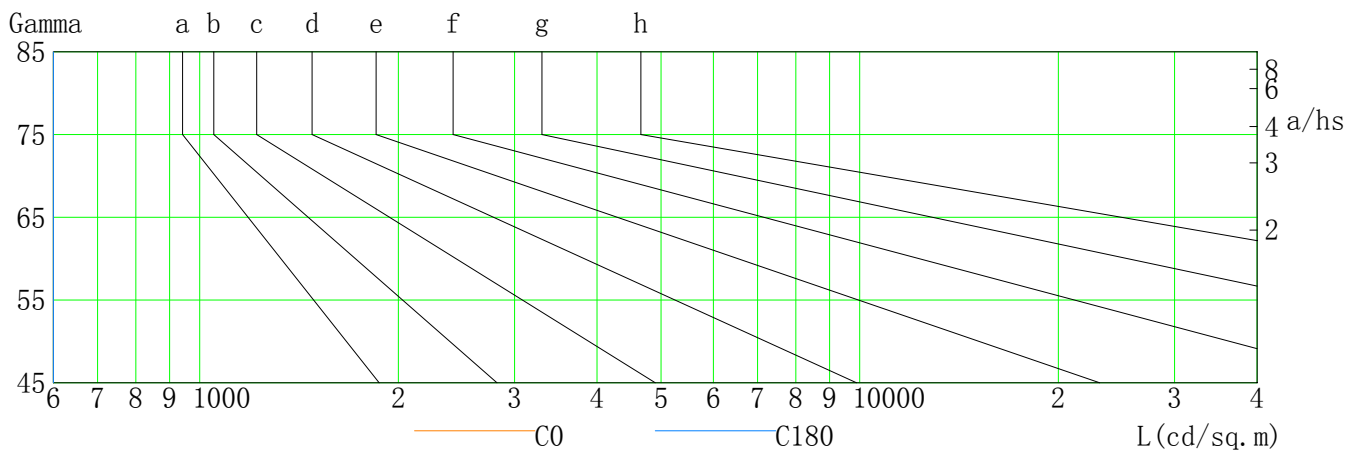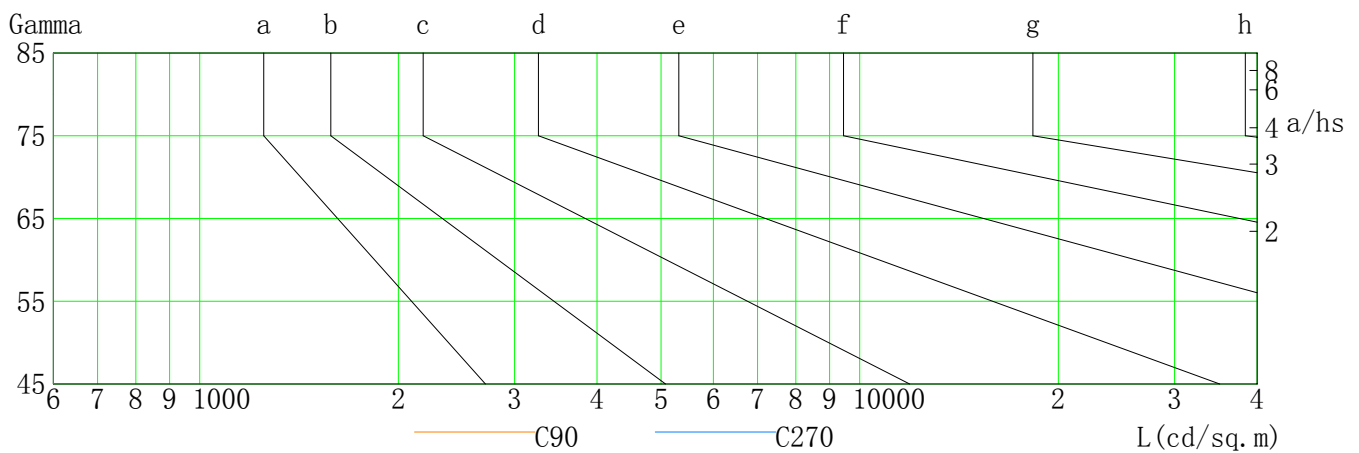

L (cd/sq. m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	0	0	0	0	0	0	0	0	0
C90	0	0	0	0	0	0	0	0	0
C180	0	0	0	0	0	0	0	0	0
C270	0	0	0	0	0	0	0	0	0

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

照度距离关系图

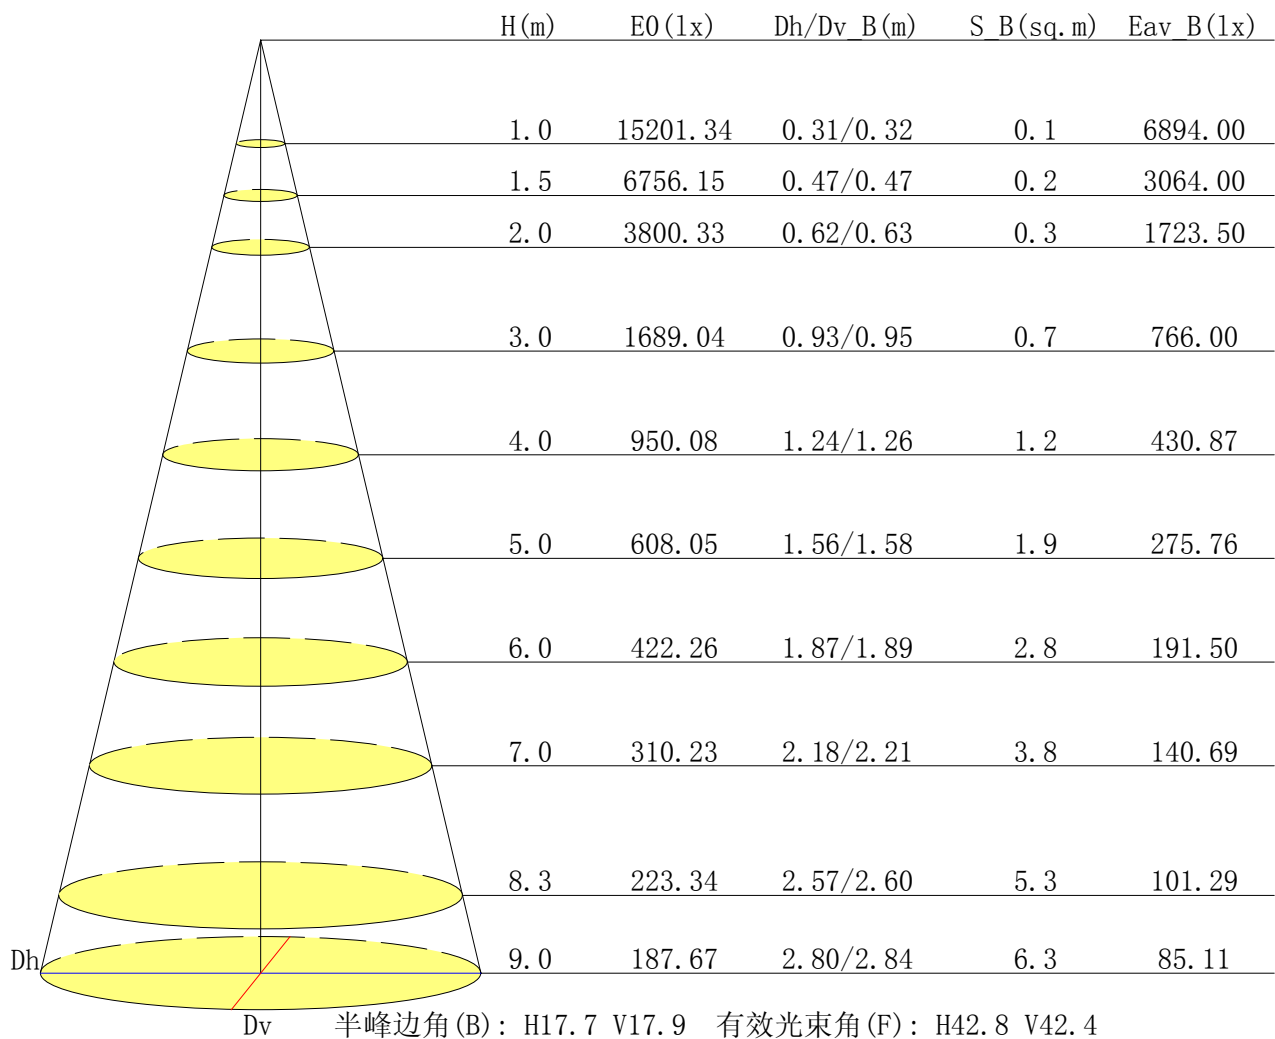

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

垂直面等照度曲线

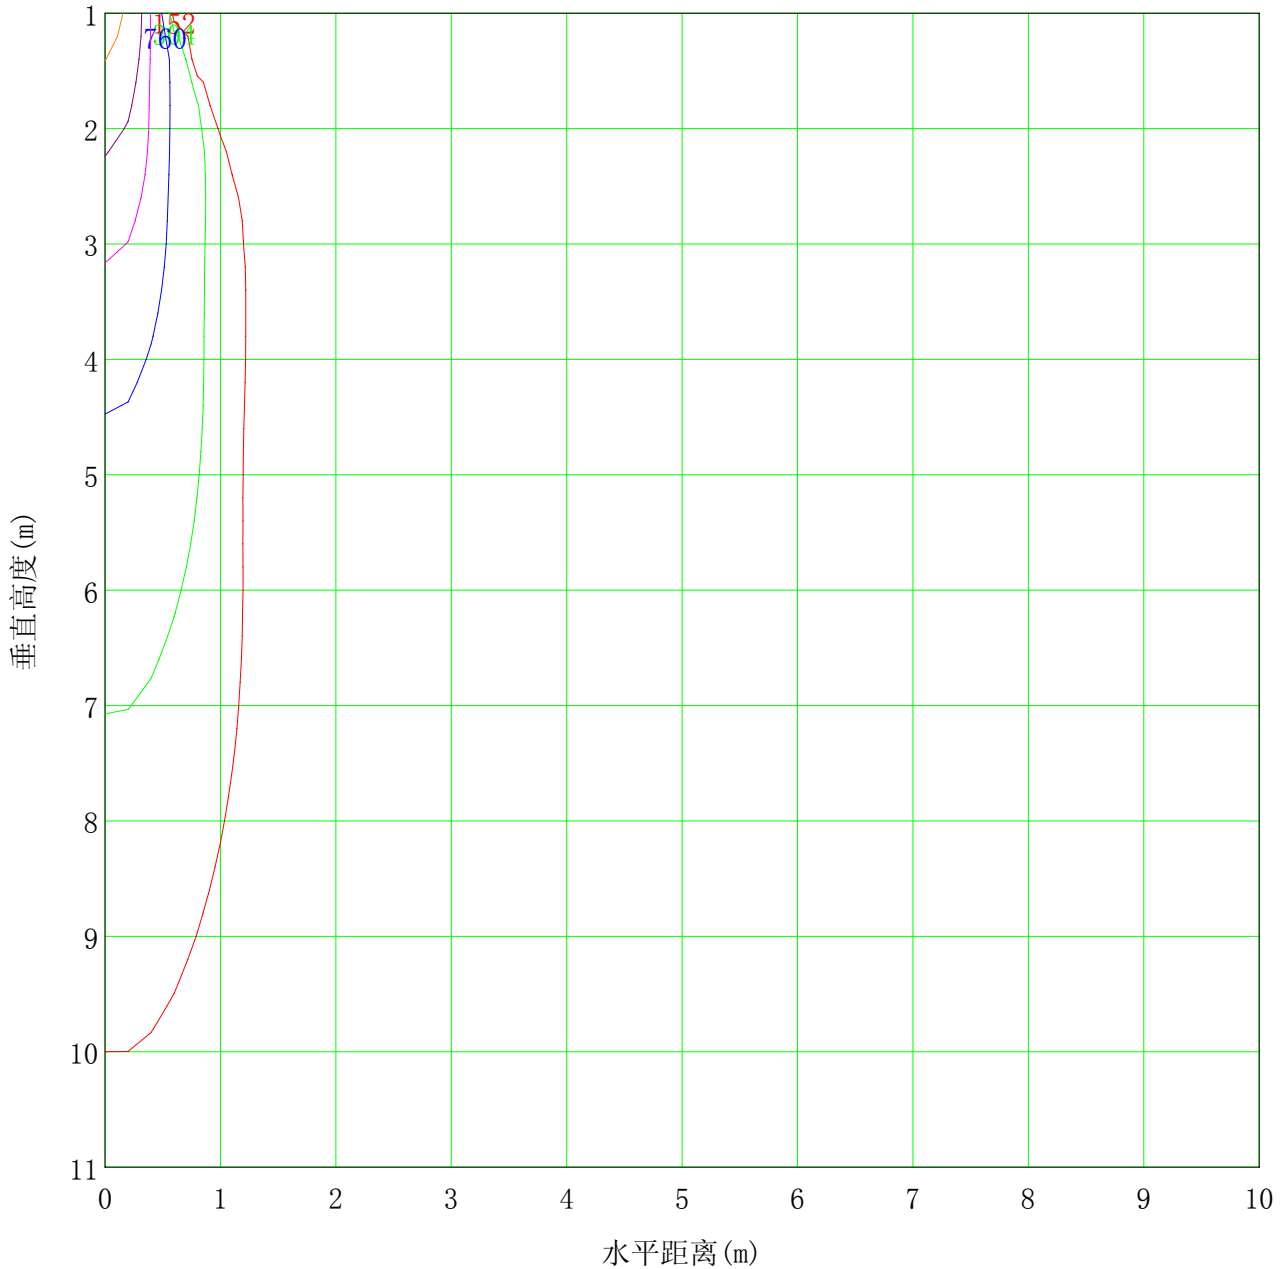

最低高度(米): 1m	最大高度(米): 11	最大照度值: 15201
— (1%): 152 lx	— (2%): 304 lx	
— (5%): 760 lx	— (10%): 1520 lx	
— (20%): 3040 lx	— (50%): 7601 lx	
— (100%): 15201 lx		

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:

灯具有效平均照度图

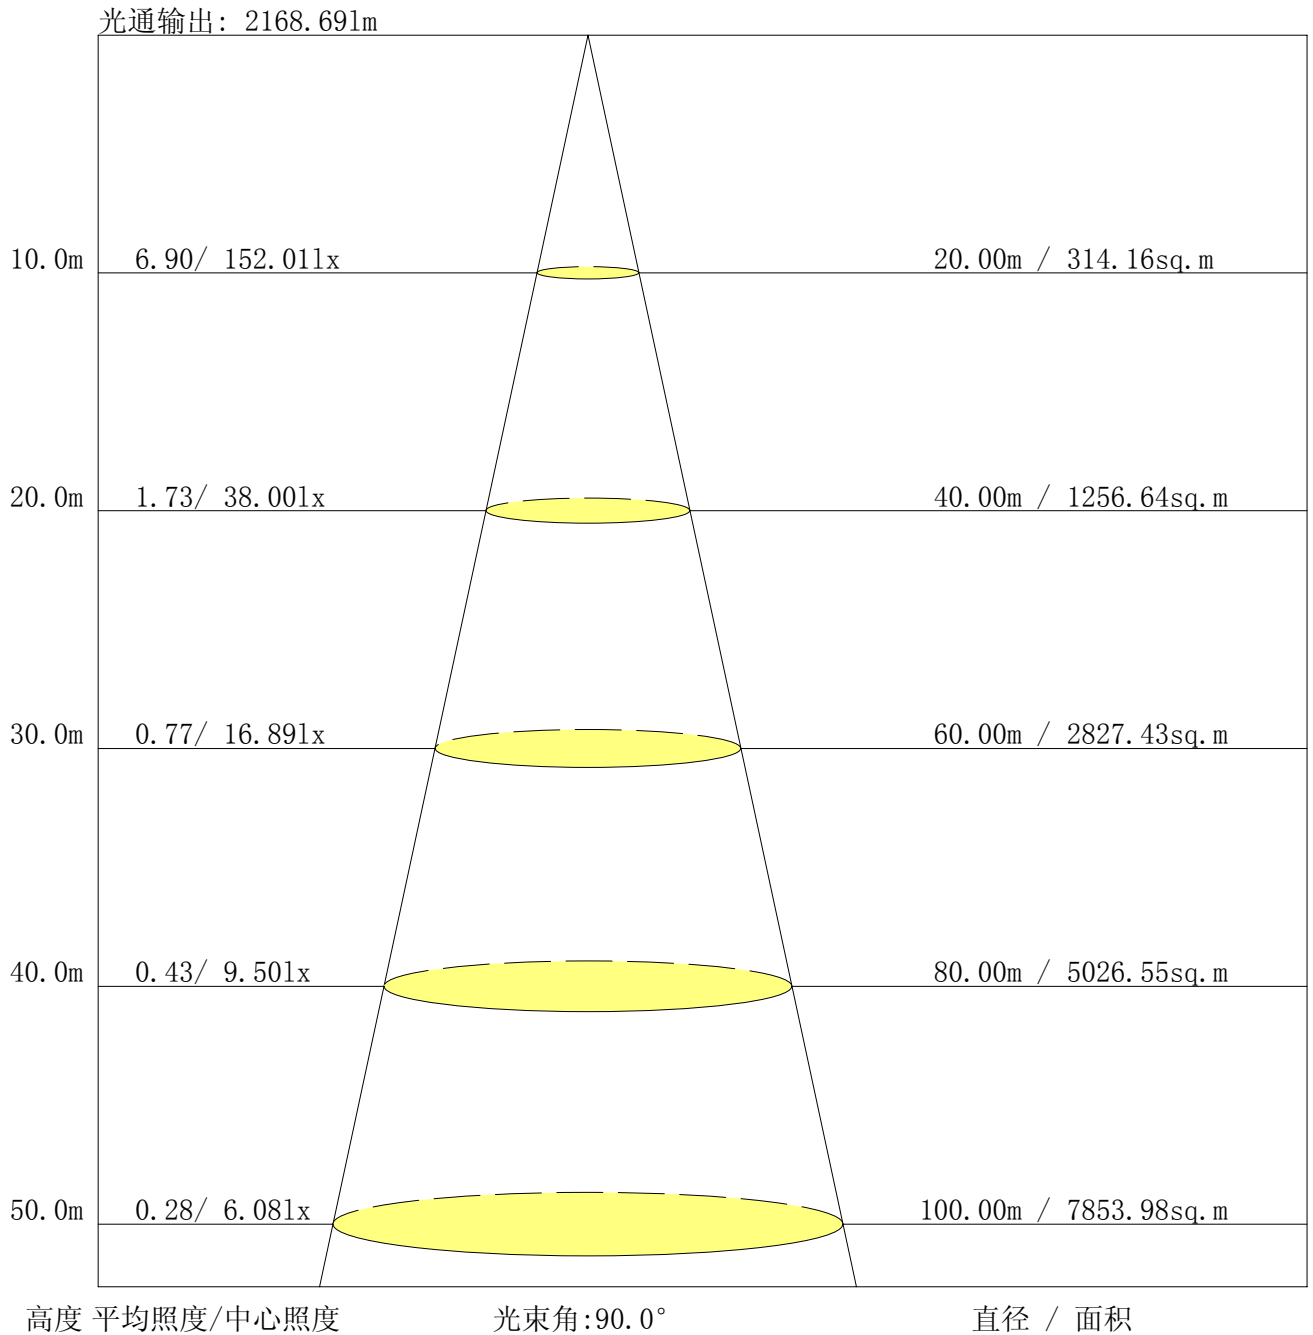

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



光强分布数据表格

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G0.0	15201.3	14793.7	15201.3	14793.7	15201.3					
G1.0	15245.2	14959.7	14808.5	14302.0	15245.2					
G2.0	14933.3	14771.0	14068.4	13504.8	14933.3					
G3.0	14290.4	14233.8	13148.5	12566.4	14290.4					
G4.0	13417.0	13496.3	12167.2	11597.8	13417.0					
G5.0	12425.2	12571.7	11077.6	10559.5	12425.2					
G6.0	11383.7	11620.5	10051.4	9507.9	11383.7					
G7.0	10303.6	10625.0	8969.7	8415.6	10303.6					
G8.0	9216.6	9592.5	7885.9	7331.3	9216.6					
G9.0	8096.3	8545.2	6809.0	6268.6	8096.3					
G10.0	6984.5	7459.8	5788.6	5282.6	6984.5					
G11.0	5936.6	6395.5	4878.2	4446.8	5936.6					
G12.0	5001.4	5430.1	4162.9	3830.9	5001.4					
G13.0	4275.0	4559.9	3626.8	3336.5	4275.0					
G14.0	3725.7	3900.1	3210.2	2966.5	3725.7					
G15.0	3285.3	3383.1	2845.4	2644.0	3285.3					
G16.0	2933.2	2983.4	2531.9	2351.1	2933.2					
G17.0	2620.2	2654.5	2264.9	2101.5	2620.2					
G18.0	2348.4	2364.8	2031.7	1881.1	2348.4					
G19.0	2124.3	2122.7	1827.1	1675.9	2124.3					
G20.0	1923.9	1913.3	1621.5	1469.8	1923.9					
G21.0	1735.2	1728.3	1454.4	1303.2	1735.2					
G22.0	1553.8	1561.2	1262.5	1096.0	1553.8					
G23.0	1404.2	1420.6	1030.4	858.1	1404.2					
G24.0	1235.5	1289.5	780.3	620.2	1235.5					
G25.0	1050.0	1119.8	435.6	322.0	1050.0					
G26.0	836.4	876.0	168.6	105.7	836.4					
G27.0	512.3	539.3	58.7	52.3	512.3					
G28.0	227.9	250.1	47.0	42.3	227.9					
G29.0	68.7	79.8	38.6	34.4	68.7					
G30.0	49.2	58.7	31.7	28.0	49.2					
G31.0	40.7	47.0	25.4	22.7	40.7					
G32.0	31.7	37.0	19.6	16.9	31.7					
G33.0	26.4	29.1	14.8	12.2	26.4					
G34.0	19.6	22.2	11.6	10.1	19.6					
G35.0	14.8	15.3	7.9	7.4	14.8					
G36.0	11.6	11.6	5.3	4.8	11.6					

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



光强分布数据表格 (续 1)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G37.0	8.5	8.5	1.6	0.5	8.5					
G38.0	5.8	5.8	0.0	0.0	5.8					
G39.0	1.6	1.6	0.0	0.0	1.6					
G40.0	0.0	0.0	0.0	0.0	0.0					
G41.0	0.0	0.0	0.0	0.0	0.0					
G42.0	0.0	0.0	0.0	0.0	0.0					
G43.0	0.0	0.0	0.0	0.0	0.0					
G44.0	0.0	0.0	0.0	0.0	0.0					
G45.0	0.0	0.0	0.0	0.0	0.0					
G46.0	0.0	0.0	0.0	0.0	0.0					
G47.0	0.0	0.0	0.0	0.0	0.0					
G48.0	0.0	0.0	0.0	0.0	0.0					
G49.0	0.0	0.0	0.0	0.0	0.0					
G50.0	0.0	0.0	0.0	0.0	0.0					
G51.0	0.0	0.0	0.0	0.0	0.0					
G52.0	0.0	0.0	0.0	0.0	0.0					
G53.0	0.0	0.0	0.0	0.0	0.0					
G54.0	0.0	0.0	0.0	0.0	0.0					
G55.0	0.0	0.0	0.0	0.0	0.0					
G56.0	0.0	0.0	0.0	0.0	0.0					
G57.0	0.0	0.0	0.0	0.0	0.0					
G58.0	0.0	0.0	0.0	0.0	0.0					
G59.0	0.0	0.0	0.0	0.0	0.0					
G60.0	0.0	0.0	0.0	0.0	0.0					
G61.0	0.0	0.0	0.0	0.0	0.0					
G62.0	0.0	0.0	0.0	0.0	0.0					
G63.0	0.0	0.0	0.0	0.0	0.0					
G64.0	0.0	0.0	0.0	0.0	0.0					
G65.0	0.0	0.0	0.0	0.0	0.0					
G66.0	0.0	0.0	0.0	0.0	0.0					
G67.0	0.0	0.0	0.0	0.0	0.0					
G68.0	0.0	0.0	0.0	0.0	0.0					
G69.0	0.0	0.0	0.0	0.0	0.0					
G70.0	0.0	0.0	0.0	0.0	0.0					
G71.0	0.0	0.0	0.0	0.0	0.0					
G72.0	0.0	0.0	0.0	0.0	0.0					
G73.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



光强分布数据表格 (续 2)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G74.0	0.0	0.0	0.0	0.0	0.0					
G75.0	0.0	0.0	0.0	0.0	0.0					
G76.0	0.0	0.0	0.0	0.0	0.0					
G77.0	0.0	0.0	0.0	0.0	0.0					
G78.0	0.0	0.0	0.0	0.0	0.0					
G79.0	0.0	0.0	0.0	0.0	0.0					
G80.0	0.0	0.0	0.0	0.0	0.0					
G81.0	0.0	0.0	0.0	0.0	0.0					
G82.0	0.0	0.0	0.0	0.0	0.0					
G83.0	0.0	0.0	0.0	0.0	0.0					
G84.0	0.0	0.0	0.0	0.0	0.0					
G85.0	0.0	0.0	0.0	0.0	0.0					
G86.0	0.0	0.0	0.0	0.0	0.0					
G87.0	0.0	0.0	0.0	0.0	0.0					
G88.0	0.0	0.0	0.0	0.0	0.0					
G89.0	0.0	0.0	0.0	0.0	0.0					
G90.0	0.0	0.0	0.0	0.0	0.0					
G91.0	0.0	0.0	0.0	0.0	0.0					
G92.0	0.0	0.0	0.0	0.0	0.0					
G93.0	0.0	0.0	0.0	0.0	0.0					
G94.0	0.0	0.0	0.0	0.0	0.0					
G95.0	0.0	0.0	0.0	0.0	0.0					
G96.0	0.0	0.0	0.0	0.0	0.0					
G97.0	0.0	0.0	0.0	0.0	0.0					
G98.0	0.0	0.0	0.0	0.0	0.0					
G99.0	0.0	0.0	0.0	0.0	0.0					
G100.0	0.0	0.0	0.0	0.0	0.0					
G101.0	0.0	0.0	0.0	0.0	0.0					
G102.0	0.0	0.0	0.0	0.0	0.0					
G103.0	0.0	0.0	0.0	0.0	0.0					
G104.0	0.0	0.0	0.0	0.0	0.0					
G105.0	0.0	0.0	0.0	0.0	0.0					
G106.0	0.0	0.0	0.0	0.0	0.0					
G107.0	0.0	0.0	0.0	0.0	0.0					
G108.0	0.0	0.0	0.0	0.0	0.0					
G109.0	0.0	0.0	0.0	0.0	0.0					
G110.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



光强分布数据表格 (续 3)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G111.0	0.0	0.0	0.0	0.0	0.0					
G112.0	0.0	0.0	0.0	0.0	0.0					
G113.0	0.0	0.0	0.0	0.0	0.0					
G114.0	0.0	0.0	0.0	0.0	0.0					
G115.0	0.0	0.0	0.0	0.0	0.0					
G116.0	0.0	0.0	0.0	0.0	0.0					
G117.0	0.0	0.0	0.0	0.0	0.0					
G118.0	0.0	0.0	0.0	0.0	0.0					
G119.0	0.0	0.0	0.0	0.0	0.0					
G120.0	0.0	0.0	0.0	0.0	0.0					
G121.0	0.0	0.0	0.0	0.0	0.0					
G122.0	0.0	0.0	0.0	0.0	0.0					
G123.0	0.0	0.0	0.0	0.0	0.0					
G124.0	0.0	0.0	0.0	0.0	0.0					
G125.0	0.0	0.0	0.0	0.0	0.0					
G126.0	0.0	0.0	0.0	0.0	0.0					
G127.0	0.0	0.0	0.0	0.0	0.0					
G128.0	0.0	0.0	0.0	0.0	0.0					
G129.0	0.0	0.0	0.0	0.0	0.0					
G130.0	0.0	0.0	0.0	0.0	0.0					
G131.0	0.0	0.0	0.0	0.0	0.0					
G132.0	0.0	0.0	0.0	0.0	0.0					
G133.0	0.0	0.0	0.0	0.0	0.0					
G134.0	0.0	0.0	0.0	0.0	0.0					
G135.0	0.0	0.0	0.0	0.0	0.0					
G136.0	0.0	0.0	0.0	0.0	0.0					
G137.0	0.0	0.0	0.0	0.0	0.0					
G138.0	0.0	0.0	0.0	0.0	0.0					
G139.0	0.0	0.0	0.0	0.0	0.0					
G140.0	0.0	0.0	0.0	0.0	0.0					
G141.0	0.0	0.0	0.0	0.0	0.0					
G142.0	0.0	0.0	0.0	0.0	0.0					
G143.0	0.0	0.0	0.0	0.0	0.0					
G144.0	0.0	0.0	0.0	0.0	0.0					
G145.0	0.0	0.0	0.0	0.0	0.0					
G146.0	0.0	0.0	0.0	0.0	0.0					
G147.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验:



光强分布数据表格 (续 4)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G148.0	0.0	0.0	0.0	0.0	0.0					
G149.0	0.0	0.0	0.0	0.0	0.0					
G150.0	0.0	0.0	0.0	0.0	0.0					
G151.0	0.0	0.0	0.0	0.0	0.0					
G152.0	0.0	0.0	0.0	0.0	0.0					
G153.0	0.0	0.0	0.0	0.0	0.0					
G154.0	0.0	0.0	0.0	0.0	0.0					
G155.0	0.0	0.0	0.0	0.0	0.0					
G156.0	0.0	0.0	0.0	0.0	0.0					
G157.0	0.0	0.0	0.0	0.0	0.0					
G158.0	0.0	0.0	0.0	0.0	0.0					
G159.0	0.0	0.0	0.0	0.0	0.0					
G160.0	0.0	0.0	0.0	0.0	0.0					
G161.0	0.0	0.0	0.0	0.0	0.0					
G162.0	0.0	0.0	0.0	0.0	0.0					
G163.0	0.0	0.0	0.0	0.0	0.0					
G164.0	0.0	0.0	0.0	0.0	0.0					
G165.0	0.0	0.0	0.0	0.0	0.0					
G166.0	0.0	0.0	0.0	0.0	0.0					
G167.0	0.0	0.0	0.0	0.0	0.0					
G168.0	0.0	0.0	0.0	0.0	0.0					
G169.0	0.0	0.0	0.0	0.0	0.0					
G170.0	0.0	0.0	0.0	0.0	0.0					
G171.0	0.0	0.0	0.0	0.0	0.0					
G172.0	0.0	0.0	0.0	0.0	0.0					
G173.0	0.0	0.0	0.0	0.0	0.0					
G174.0	0.0	0.0	0.0	0.0	0.0					
G175.0	0.0	0.0	0.0	0.0	0.0					
G176.0	0.0	0.0	0.0	0.0	0.0					
G177.0	0.0	0.0	0.0	0.0	0.0					
G178.0	0.0	0.0	0.0	0.0	0.0					
G179.0	0.0	0.0	0.0	0.0	0.0					
G180.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.650 m

环境湿度:

核 验: