

报告编号:

测试时间: 2018-12-31 14:25

产品特征

灯具制造厂商:

灯具型号: TH106006-24d

光源个数: 1

电流: 0.055 A

功率因数: 0.536

光源种类: LED

电压: 221.5 V

功率: 6.50 W

光度结果

灯具CIE分类: 直接型

灯具光通量: 375.5 lm

下射光通量比: 100%

水平扩散角 (25%, 50%, 75%, 100%): H40, H26.9, H17.1, H0

垂直扩散角 (25%, 50%, 75%, 100%): V39.5, V26.8, V17.1, V0

灯具光效等级 (LER): 58

峰值光强: 1337.21 cd

额定光通量: 375.5 lm

灯具效率: 100%

上射光通量比: 0%


中心光强: 1334.55 cd

峰值光强位置: H90 V0

灯具实物照片



配光曲线

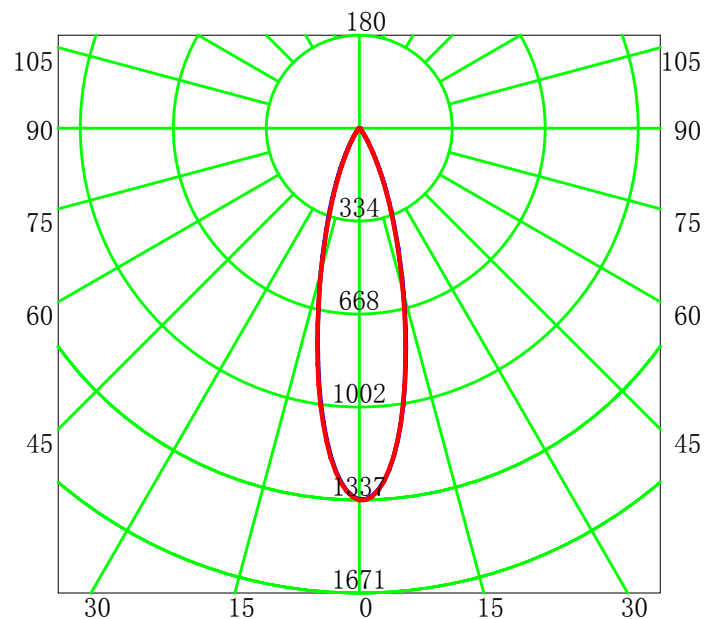

平均光束角 (50%): 26.9°

单位: cd

— C0-C180

— C90-C270

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.167 m

环境湿度:

核 验:

配光曲线

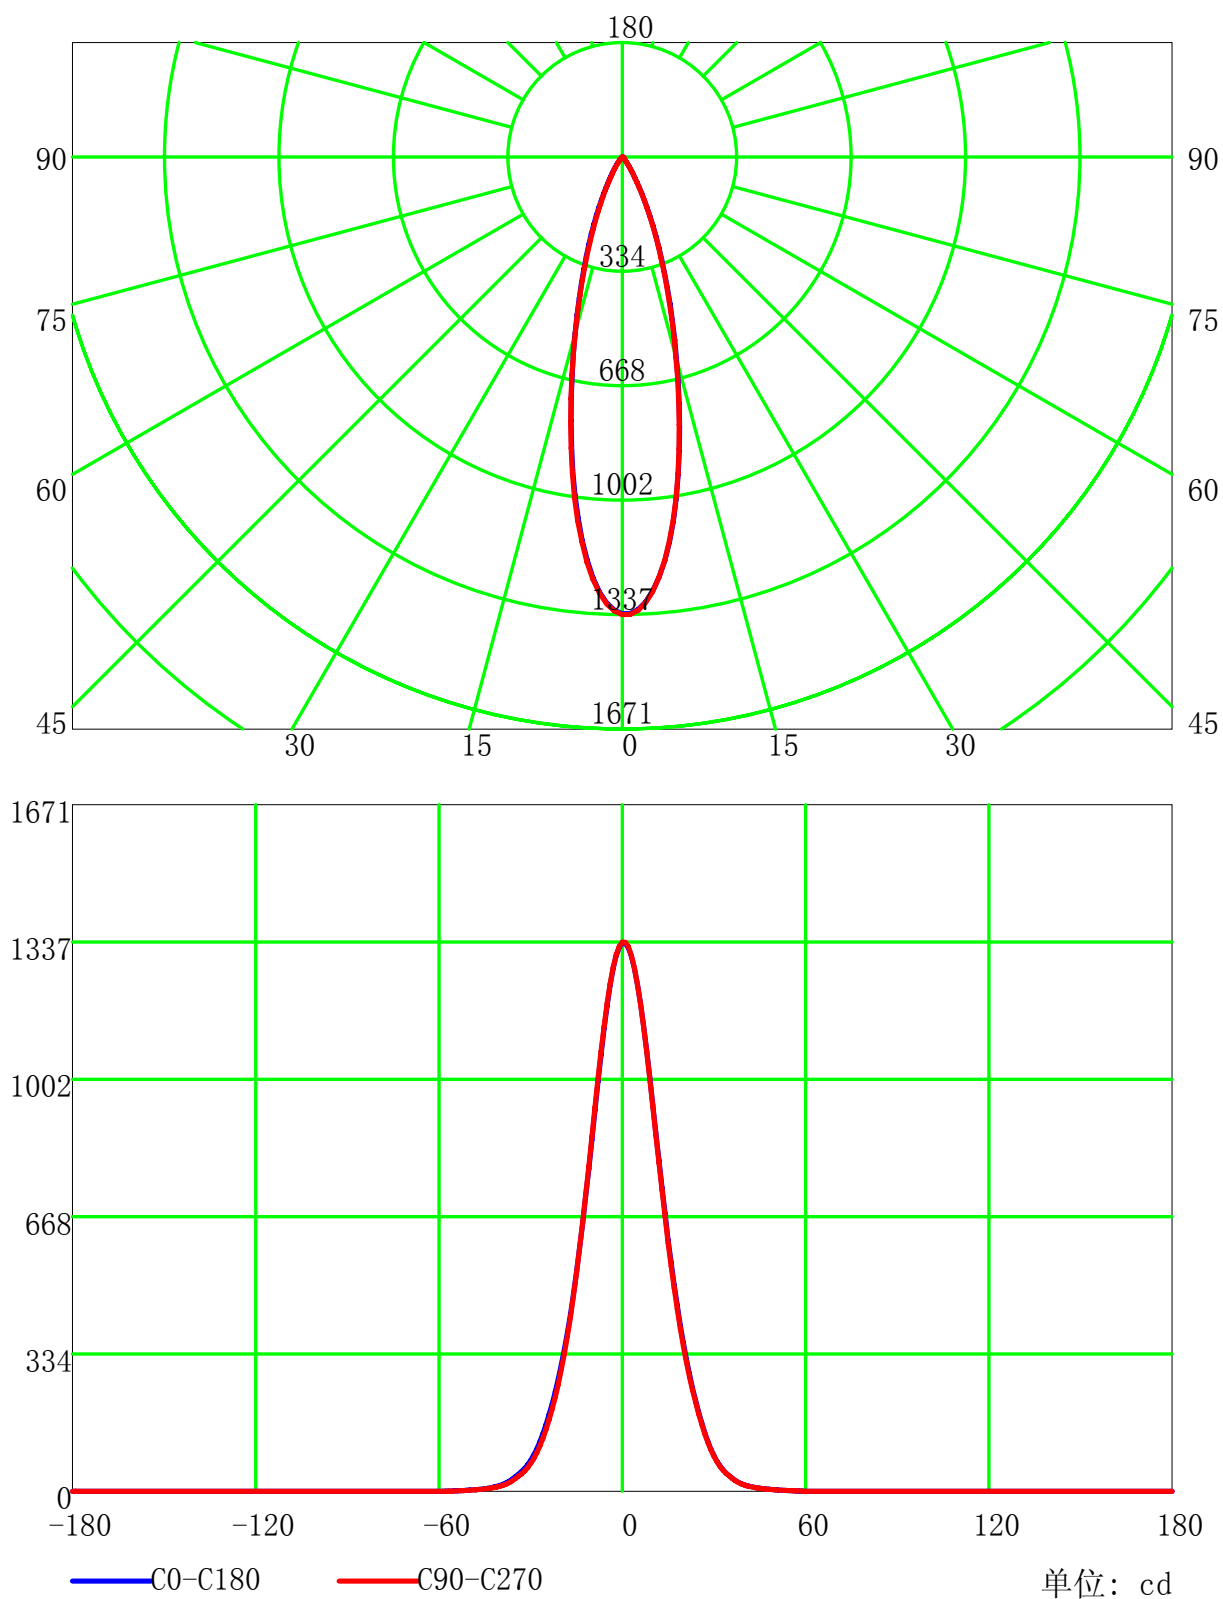

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.167 m

环境湿度:

核 验:

配光曲线(cd/klm)

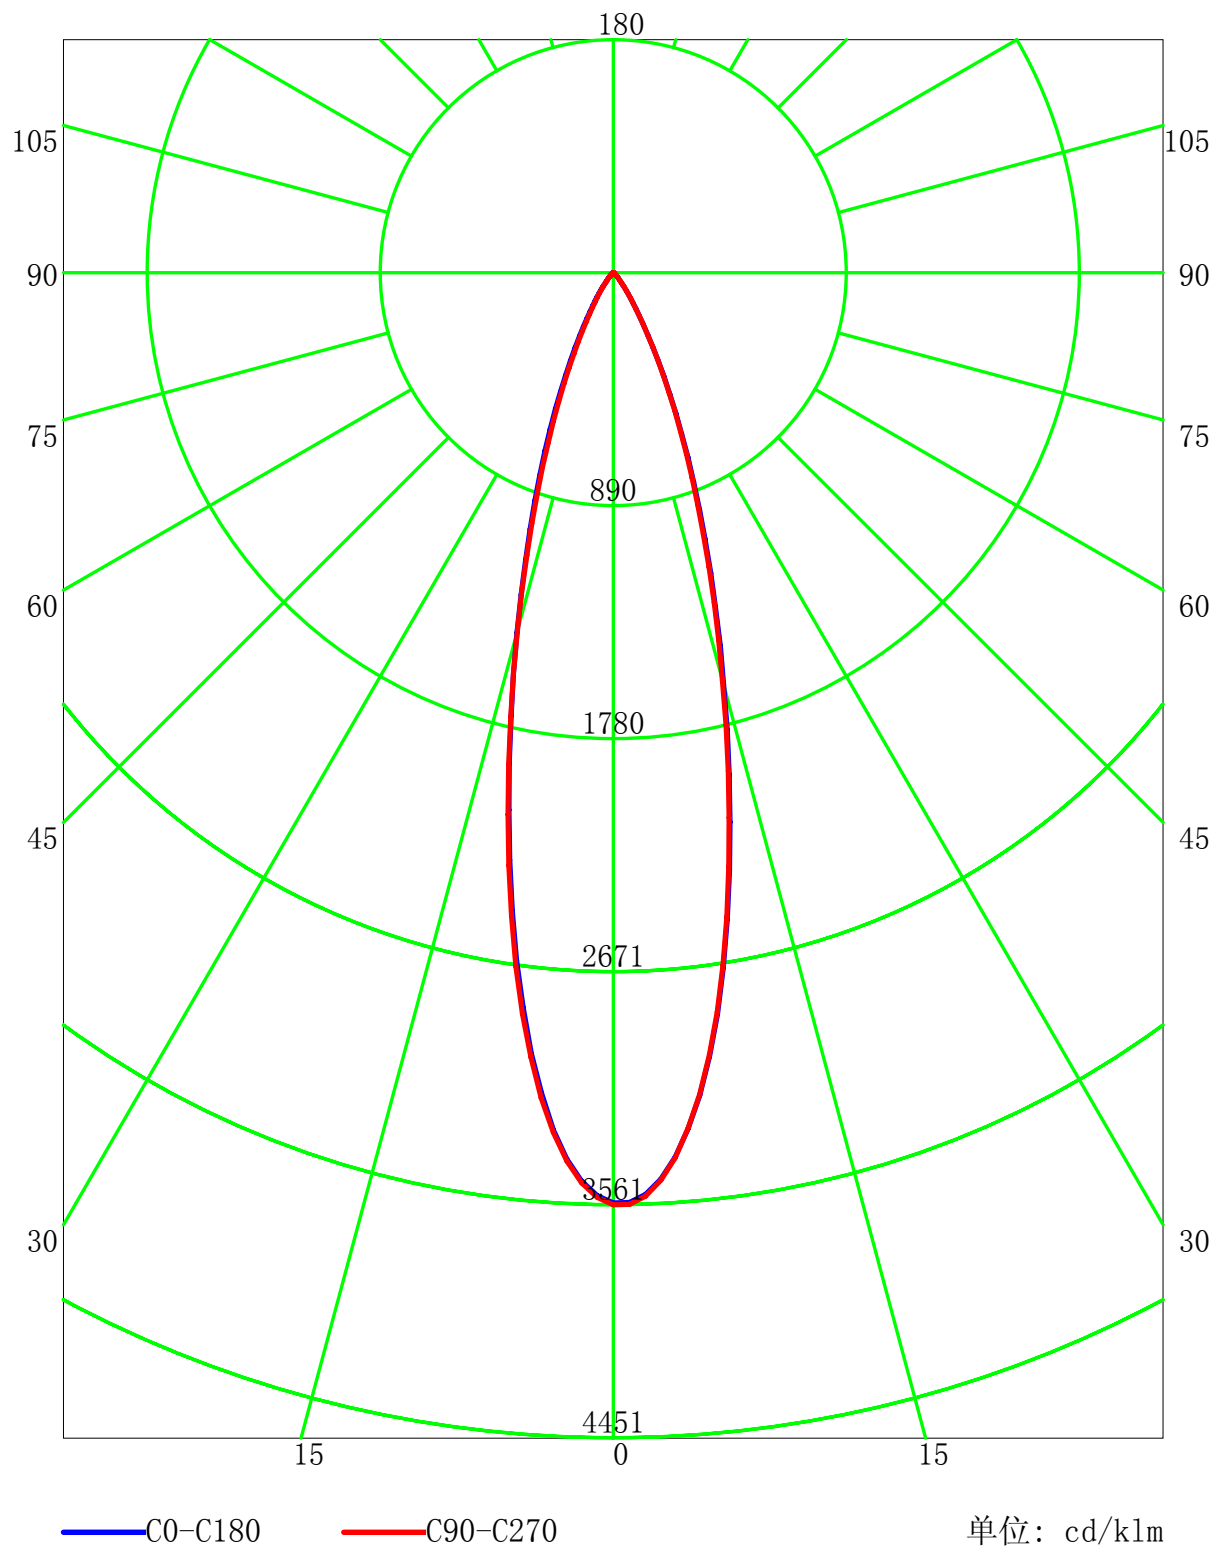

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.167 m

环境湿度:

核 验:

室内灯具利用系数表


RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	112	110	109	112	110	109	107	106	105	104	103	102	101	99	98	98	96
2	111	107	103	101	108	105	102	100	102	100	98	99	97	95	96	95	94	92
3	107	102	98	95	105	100	97	94	98	95	92	95	93	91	93	91	90	88
4	103	97	93	90	101	96	92	89	94	91	88	92	89	87	90	88	86	85
5	99	93	88	85	98	92	88	85	90	87	84	89	86	83	87	85	83	82
6	96	89	85	81	95	89	84	81	87	83	81	86	83	80	85	82	80	78
7	93	86	81	78	92	85	81	78	84	80	77	83	80	77	82	79	77	76
8	90	83	78	75	89	82	78	75	81	77	75	80	77	74	80	76	74	73
9	87	80	75	72	86	79	75	72	79	75	72	78	74	72	77	74	72	71
10	85	77	73	70	84	77	73	70	76	72	70	75	72	69	75	72	69	68

最大允许安装距离高度比(横向): 0.45

最大允许安装距离高度比(纵向): 0.45

最大允许安装距离高度比(对角): 0.47

灯具概算曲线

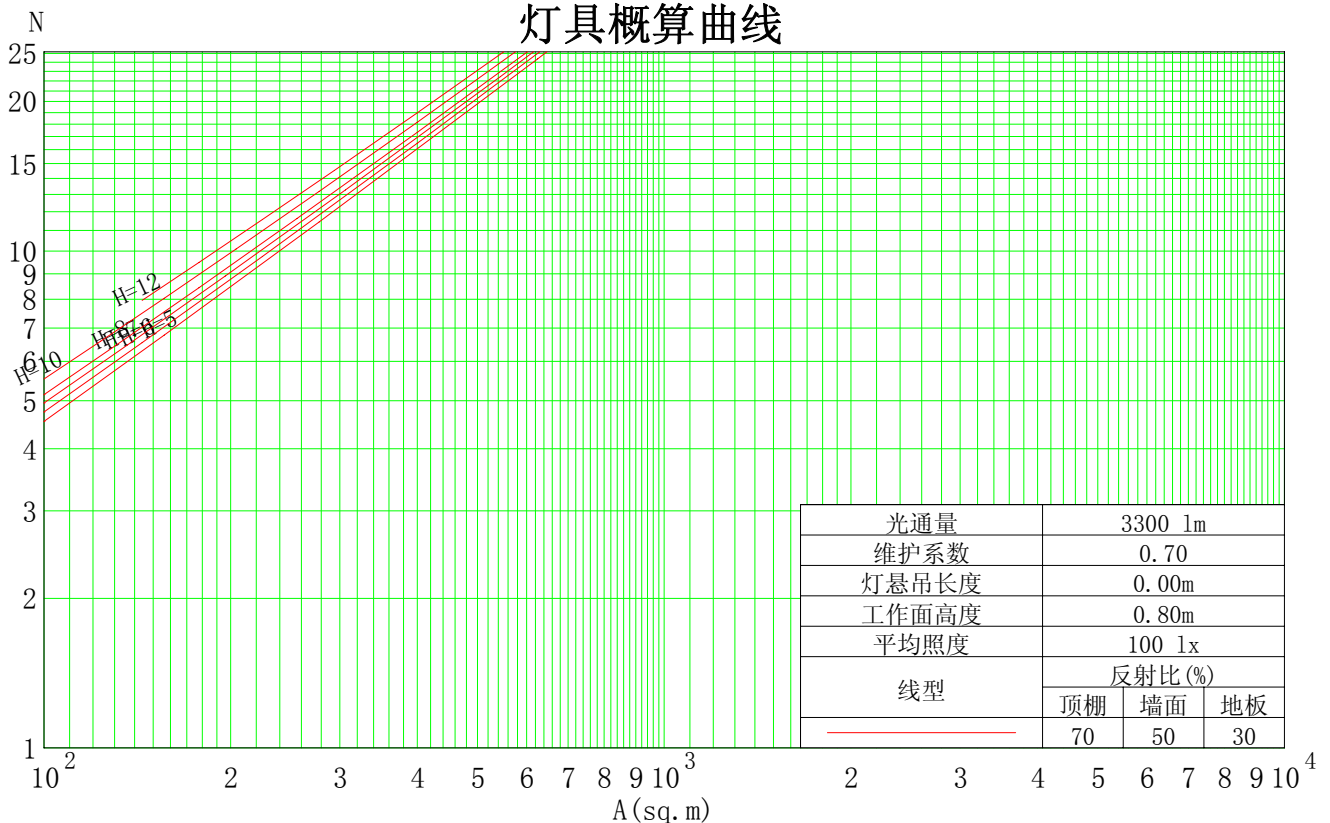

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.167 m

环境湿度:

核 验:

水平面等照度曲线

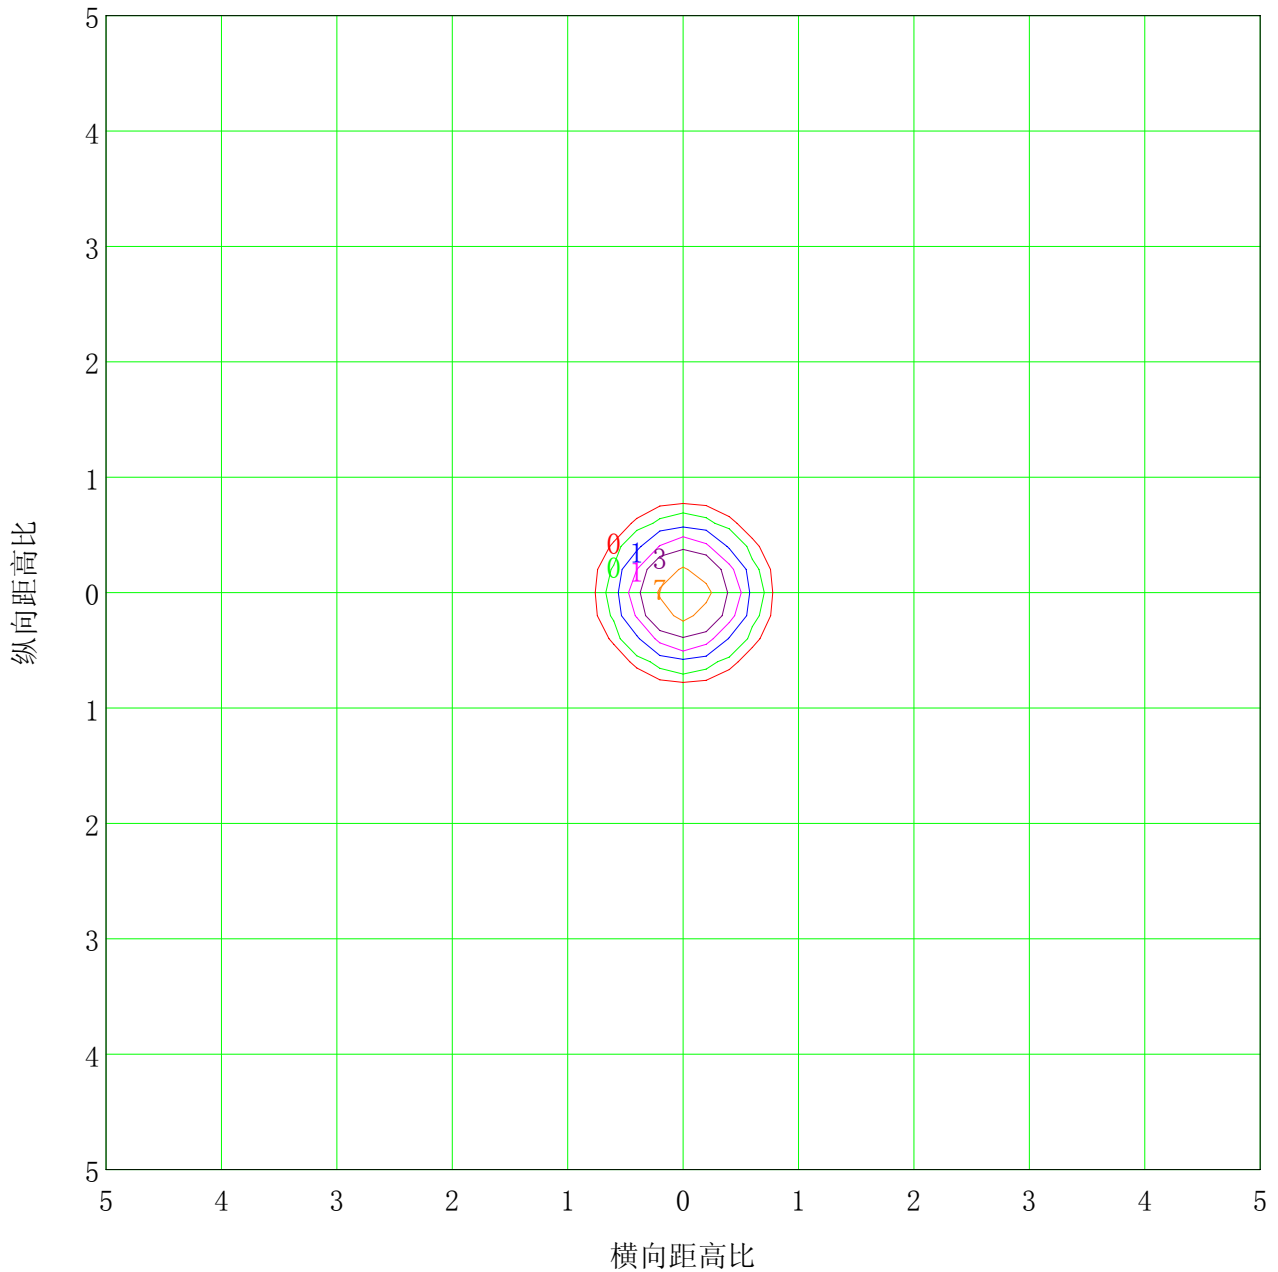

安装高度: 10m

最大照度值(100%): 13 lx

(1%): 0 lx
(5%): 1 lx
(20%): 3 lx
(100%): 13 lx

(2%): 0 lx
(10%): 1 lx
(50%): 7 lx

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.167 m



环境湿度:

核 验:

亮度限制曲线

眩光评价价值	质量等级	使用照度 / lx							
		2000	1000	500	<=300				
1.15	A								
1.50	B								
1.85	C								
2.20	D								
2.55	E								

a b c d e f g h

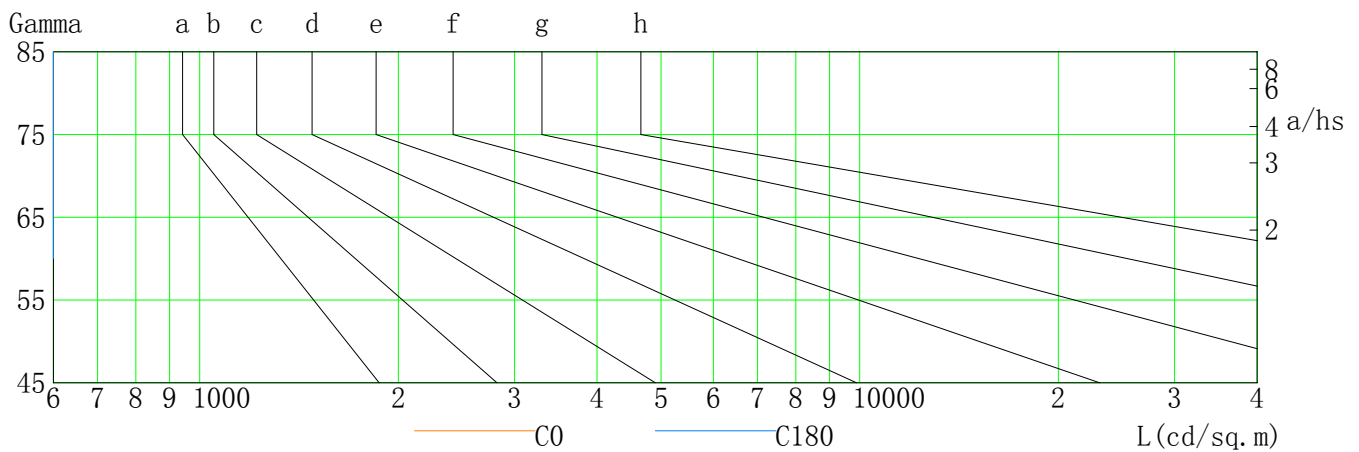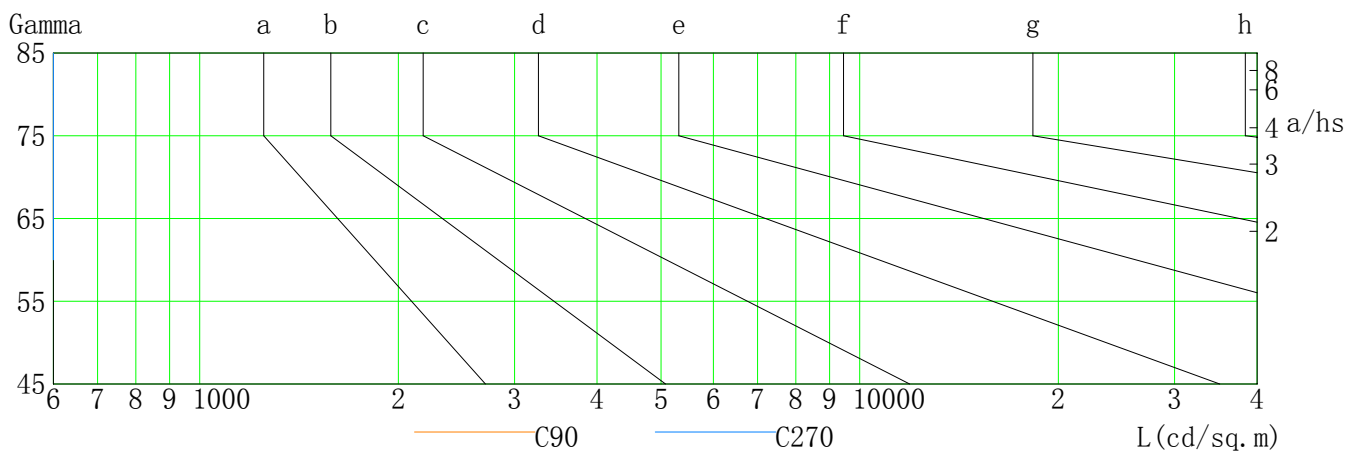

L (cd/sq. m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	8	4	2	0	0	0	0	0	0
C90	7	4	2	0	0	0	0	0	0
C180	7	3	1	0	0	0	0	0	0
C270	6	3	1	0	0	0	0	0	0

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.167 m

环境湿度:

核 验:

照度距离关系图

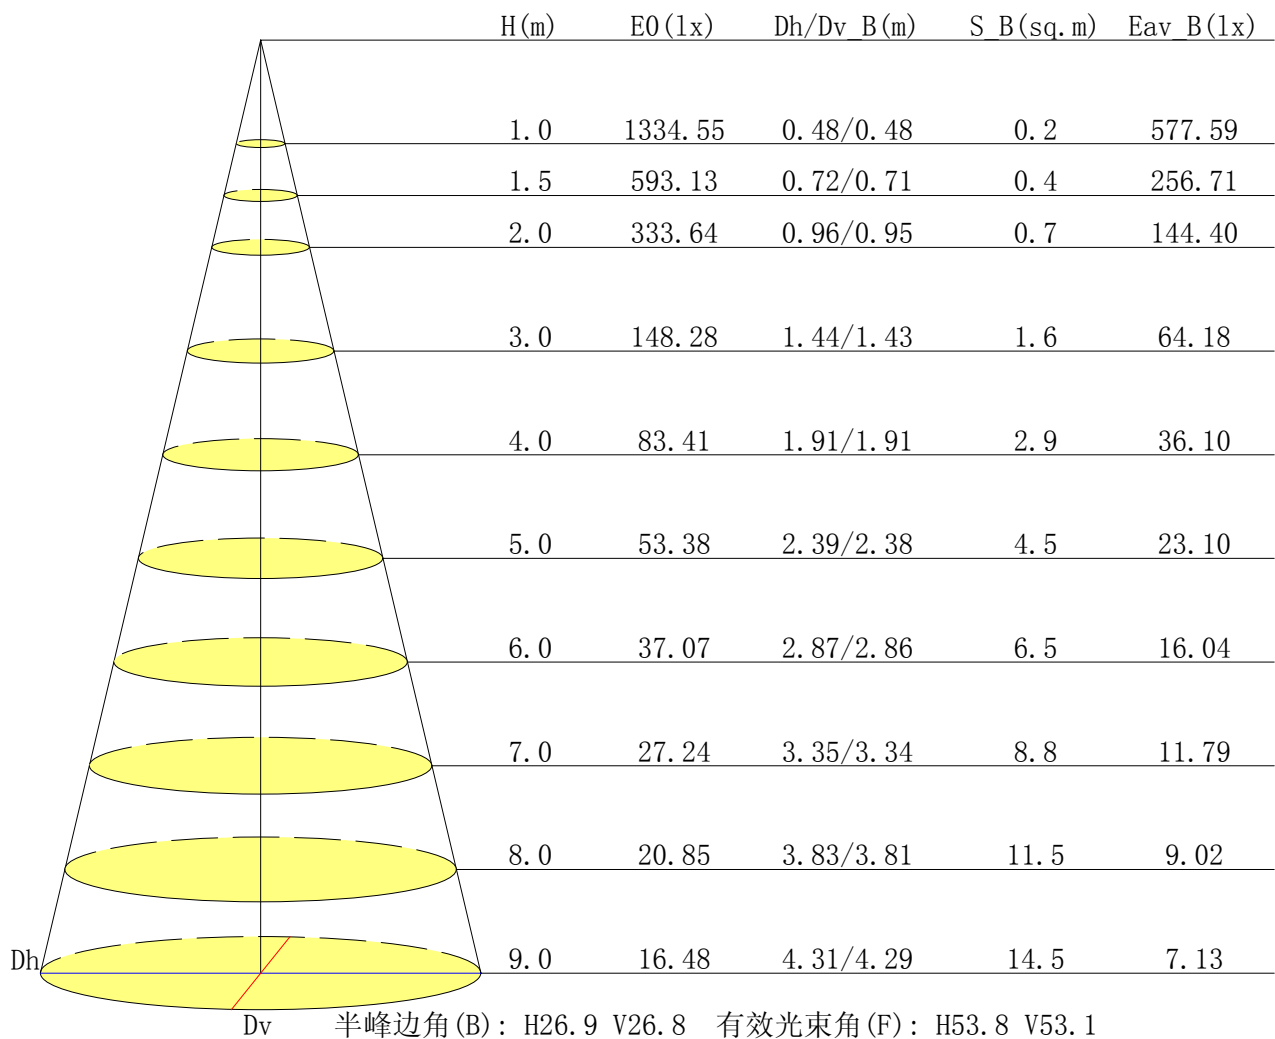

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.167 m

环境湿度:

核 验:

垂直面等照度曲线

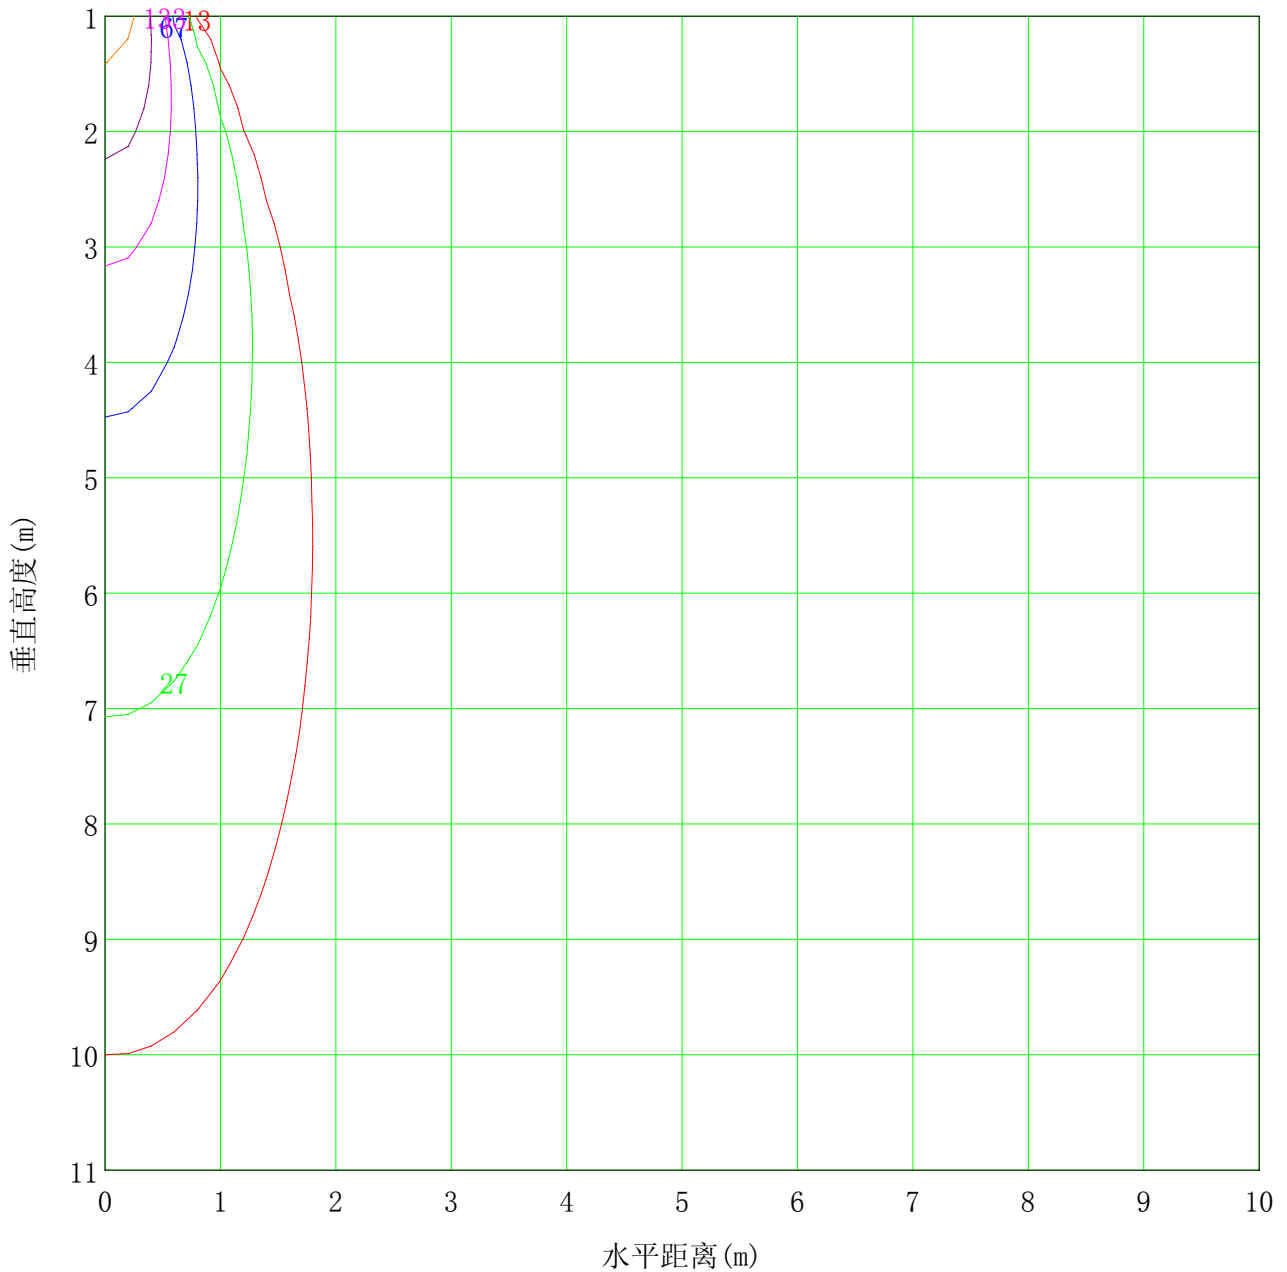

最低高度 (米): 1m	最大高度 (米): 11	最大照度值: 1335
(1%): 13 lx	(2%): 27 lx	
(5%): 67 lx	(10%): 133 lx	
(20%): 267 lx	(50%): 667 lx	
(100%): 1335 lx		

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0


测试设备: GPM-1600

测试距离: 8.167 m

环境湿度:

核 验:

灯具有效平均照度图

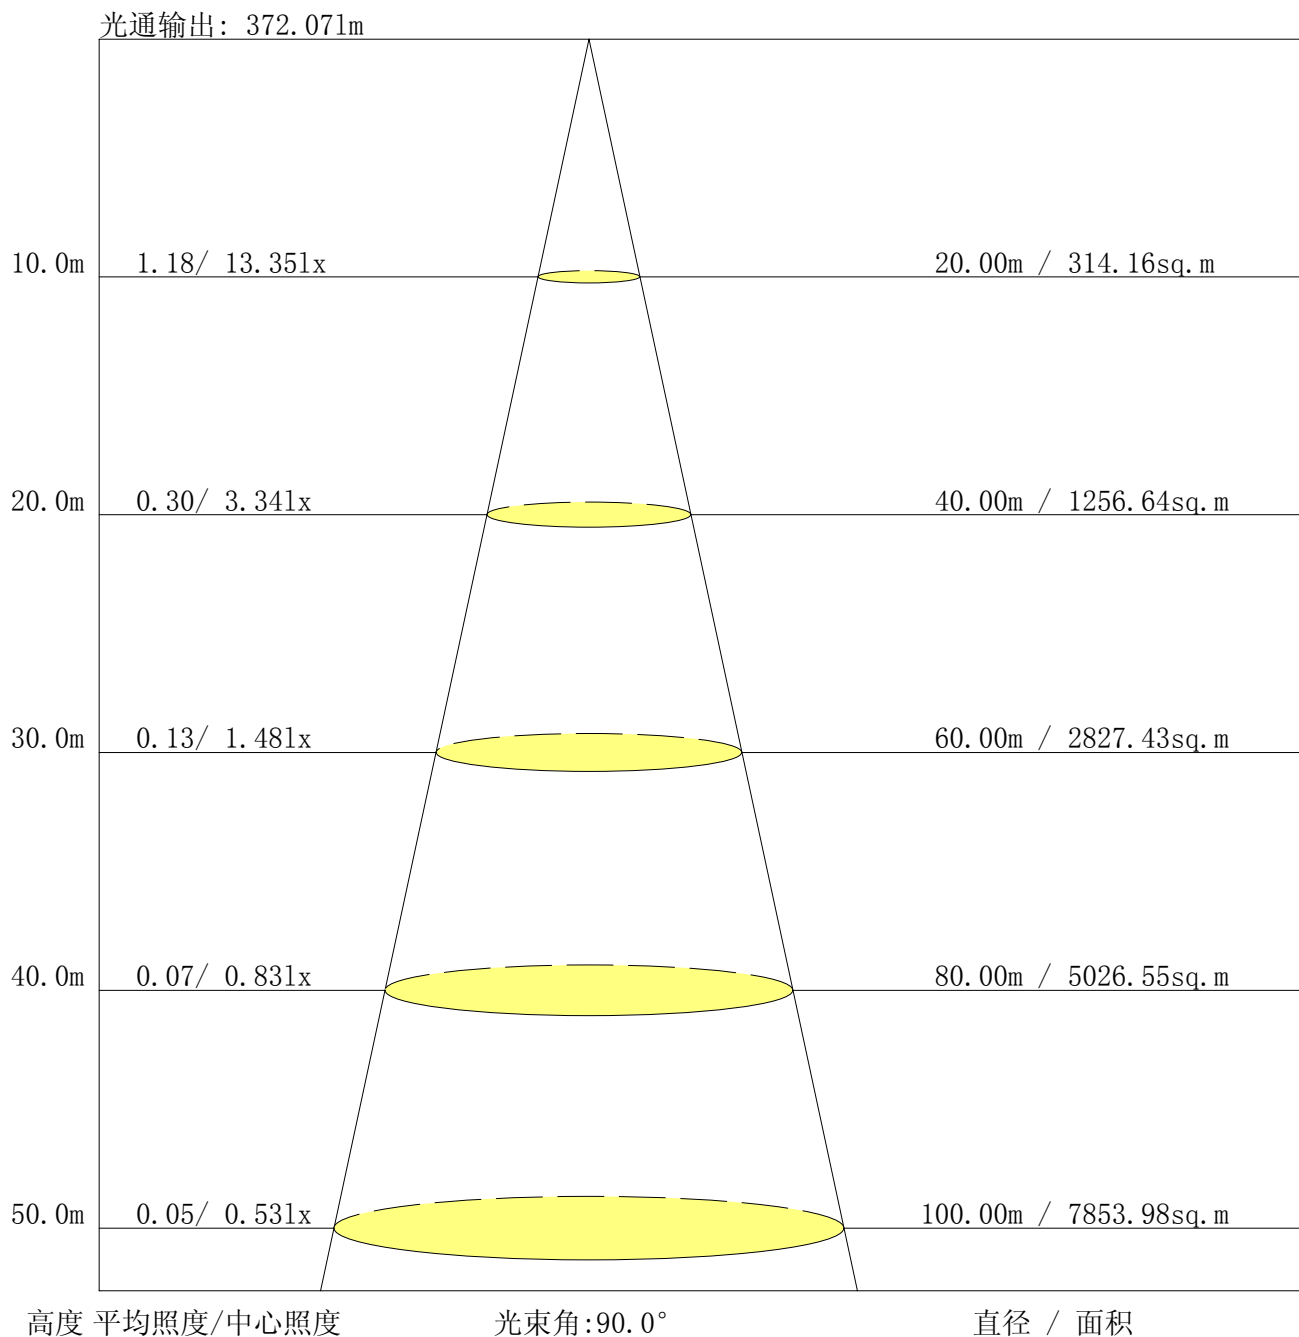

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.167 m

环境湿度:

核 验:



光强分布数据表格

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G0.0	1334.6	1337.2	1334.6	1337.2	1334.6					
G1.0	1334.1	1336.7	1324.4	1327.0	1334.1					
G2.0	1323.1	1325.8	1304.1	1306.7	1323.1					
G3.0	1302.3	1303.8	1273.6	1276.4	1302.3					
G4.0	1272.0	1273.2	1233.1	1236.4	1272.0					
G5.0	1232.8	1232.1	1181.8	1188.4	1232.8					
G6.0	1186.8	1185.6	1126.4	1131.6	1186.8					
G7.0	1132.8	1130.5	1062.3	1071.2	1132.8					
G8.0	1074.1	1071.1	997.1	1005.0	1074.1					
G9.0	1009.6	1006.0	927.1	934.9	1009.6					
G10.0	941.9	938.5	855.8	863.5	941.9					
G11.0	873.7	868.0	785.3	791.9	873.7					
G12.0	806.0	799.5	718.8	722.3	806.0					
G13.0	739.3	733.7	651.7	654.8	739.3					
G14.0	676.4	668.8	593.1	592.5	676.4					
G15.0	611.7	605.0	534.6	531.6	611.7					
G16.0	557.5	548.3	480.4	477.4	557.5					
G17.0	501.8	495.0	430.7	424.2	501.8					
G18.0	453.2	444.5	386.8	378.4	453.2					
G19.0	404.1	396.7	345.7	335.4	404.1					
G20.0	362.1	354.2	308.8	297.4	362.1					
G21.0	322.0	315.4	273.6	260.7	322.0					
G22.0	286.5	279.7	242.4	229.4	286.5					
G23.0	251.5	246.7	212.7	200.9	251.5					
G24.0	221.0	216.9	186.8	174.1	221.0					
G25.0	192.3	188.3	162.4	150.4	192.3					
G26.0	166.8	163.9	140.6	129.3	166.8					
G27.0	142.9	140.1	120.9	110.5	142.9					
G28.0	121.8	119.8	103.2	94.1	121.8					
G29.0	103.2	101.7	88.6	80.0	103.2					
G30.0	87.0	86.0	75.9	68.3	87.0					
G31.0	73.4	72.3	64.9	58.0	73.4					
G32.0	62.0	60.9	56.1	49.6	62.0					
G33.0	52.4	51.6	48.3	42.7	52.4					
G34.0	44.6	44.0	42.4	37.1	44.6					
G35.0	38.1	37.9	36.0	31.4	38.1					
G36.0	32.2	31.4	29.9	26.0	32.2					

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.167 m

环境湿度:

核 验:



光强分布数据表格 (续 1)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G37.0	26.4	26.0	24.9	21.4	26.4					
G38.0	22.2	21.5	20.8	17.8	22.2					
G39.0	18.6	18.2	17.5	15.0	18.6					
G40.0	15.9	15.4	14.8	12.8	15.9					
G41.0	13.6	13.2	12.6	10.9	13.6					
G42.0	11.8	11.3	10.7	9.4	11.8					
G43.0	10.2	9.8	9.1	8.1	10.2					
G44.0	8.9	8.5	7.7	6.9	8.9					
G45.0	7.7	7.4	6.6	5.9	7.7					
G46.0	6.8	6.5	5.7	5.1	6.8					
G47.0	5.9	5.7	4.9	4.4	5.9					
G48.0	5.2	5.0	4.3	3.8	5.2					
G49.0	4.5	4.4	3.6	3.4	4.5					
G50.0	4.0	3.8	3.1	2.8	4.0					
G51.0	3.5	3.4	2.7	2.4	3.5					
G52.0	3.0	2.9	2.2	1.9	3.0					
G53.0	2.5	2.5	1.9	1.7	2.5					
G54.0	2.2	2.2	1.5	1.3	2.2					
G55.0	1.8	1.8	1.2	1.0	1.8					
G56.0	1.4	1.5	0.9	0.8	1.4					
G57.0	1.1	1.2	0.6	0.4	1.1					
G58.0	0.8	0.9	0.4	0.2	0.8					
G59.0	0.6	0.6	0.2	0.0	0.6					
G60.0	0.3	0.4	0.0	0.0	0.3					
G61.0	0.1	0.1	0.0	0.0	0.1					
G62.0	0.0	0.0	0.0	0.0	0.0					
G63.0	0.0	0.0	0.0	0.0	0.0					
G64.0	0.0	0.0	0.0	0.0	0.0					
G65.0	0.0	0.0	0.0	0.0	0.0					
G66.0	0.0	0.0	0.0	0.0	0.0					
G67.0	0.0	0.0	0.0	0.0	0.0					
G68.0	0.0	0.0	0.0	0.0	0.0					
G69.0	0.0	0.0	0.0	0.0	0.0					
G70.0	0.0	0.0	0.0	0.0	0.0					
G71.0	0.0	0.0	0.0	0.0	0.0					
G72.0	0.0	0.0	0.0	0.0	0.0					
G73.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.167 m

环境湿度:

核 验:



光强分布数据表格 (续 2)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G74.0	0.0	0.0	0.0	0.0	0.0					
G75.0	0.0	0.0	0.0	0.0	0.0					
G76.0	0.0	0.0	0.0	0.0	0.0					
G77.0	0.0	0.0	0.0	0.0	0.0					
G78.0	0.0	0.0	0.0	0.0	0.0					
G79.0	0.0	0.0	0.0	0.0	0.0					
G80.0	0.0	0.0	0.0	0.0	0.0					
G81.0	0.0	0.0	0.0	0.0	0.0					
G82.0	0.0	0.0	0.0	0.0	0.0					
G83.0	0.0	0.0	0.0	0.0	0.0					
G84.0	0.0	0.0	0.0	0.0	0.0					
G85.0	0.0	0.0	0.0	0.0	0.0					
G86.0	0.0	0.0	0.0	0.0	0.0					
G87.0	0.0	0.0	0.0	0.0	0.0					
G88.0	0.0	0.0	0.0	0.0	0.0					
G89.0	0.0	0.0	0.0	0.0	0.0					
G90.0	0.0	0.0	0.0	0.0	0.0					
G91.0	0.0	0.0	0.0	0.0	0.0					
G92.0	0.0	0.0	0.0	0.0	0.0					
G93.0	0.0	0.0	0.0	0.0	0.0					
G94.0	0.0	0.0	0.0	0.0	0.0					
G95.0	0.0	0.0	0.0	0.0	0.0					
G96.0	0.0	0.0	0.0	0.0	0.0					
G97.0	0.0	0.0	0.0	0.0	0.0					
G98.0	0.0	0.0	0.0	0.0	0.0					
G99.0	0.0	0.0	0.0	0.0	0.0					
G100.0	0.0	0.0	0.0	0.0	0.0					
G101.0	0.0	0.0	0.0	0.0	0.0					
G102.0	0.0	0.0	0.0	0.0	0.0					
G103.0	0.0	0.0	0.0	0.0	0.0					
G104.0	0.0	0.0	0.0	0.0	0.0					
G105.0	0.0	0.0	0.0	0.0	0.0					
G106.0	0.0	0.0	0.0	0.0	0.0					
G107.0	0.0	0.0	0.0	0.0	0.0					
G108.0	0.0	0.0	0.0	0.0	0.0					
G109.0	0.0	0.0	0.0	0.0	0.0					
G110.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.167 m

环境湿度:

核 验:



光强分布数据表格 (续 3)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G111.0	0.0	0.0	0.0	0.0	0.0					
G112.0	0.0	0.0	0.0	0.0	0.0					
G113.0	0.0	0.0	0.0	0.0	0.0					
G114.0	0.0	0.0	0.0	0.0	0.0					
G115.0	0.0	0.0	0.0	0.0	0.0					
G116.0	0.0	0.0	0.0	0.0	0.0					
G117.0	0.0	0.0	0.0	0.0	0.0					
G118.0	0.0	0.0	0.0	0.0	0.0					
G119.0	0.0	0.0	0.0	0.0	0.0					
G120.0	0.0	0.0	0.0	0.0	0.0					
G121.0	0.0	0.0	0.0	0.0	0.0					
G122.0	0.0	0.0	0.0	0.0	0.0					
G123.0	0.0	0.0	0.0	0.0	0.0					
G124.0	0.0	0.0	0.0	0.0	0.0					
G125.0	0.0	0.0	0.0	0.0	0.0					
G126.0	0.0	0.0	0.0	0.0	0.0					
G127.0	0.0	0.0	0.0	0.0	0.0					
G128.0	0.0	0.0	0.0	0.0	0.0					
G129.0	0.0	0.0	0.0	0.0	0.0					
G130.0	0.0	0.0	0.0	0.0	0.0					
G131.0	0.0	0.0	0.0	0.0	0.0					
G132.0	0.0	0.0	0.0	0.0	0.0					
G133.0	0.0	0.0	0.0	0.0	0.0					
G134.0	0.0	0.0	0.0	0.0	0.0					
G135.0	0.0	0.0	0.0	0.0	0.0					
G136.0	0.0	0.0	0.0	0.0	0.0					
G137.0	0.0	0.0	0.0	0.0	0.0					
G138.0	0.0	0.0	0.0	0.0	0.0					
G139.0	0.0	0.0	0.0	0.0	0.0					
G140.0	0.0	0.0	0.0	0.0	0.0					
G141.0	0.0	0.0	0.0	0.0	0.0					
G142.0	0.0	0.0	0.0	0.0	0.0					
G143.0	0.0	0.0	0.0	0.0	0.0					
G144.0	0.0	0.0	0.0	0.0	0.0					
G145.0	0.0	0.0	0.0	0.0	0.0					
G146.0	0.0	0.0	0.0	0.0	0.0					
G147.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.167 m

环境湿度:

核 验:



光强分布数据表格 (续 4)

单位: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G148.0	0.0	0.0	0.0	0.0	0.0					
G149.0	0.0	0.0	0.0	0.0	0.0					
G150.0	0.0	0.0	0.0	0.0	0.0					
G151.0	0.0	0.0	0.0	0.0	0.0					
G152.0	0.0	0.0	0.0	0.0	0.0					
G153.0	0.0	0.0	0.0	0.0	0.0					
G154.0	0.0	0.0	0.0	0.0	0.0					
G155.0	0.0	0.0	0.0	0.0	0.0					
G156.0	0.0	0.0	0.0	0.0	0.0					
G157.0	0.0	0.0	0.0	0.0	0.0					
G158.0	0.0	0.0	0.0	0.0	0.0					
G159.0	0.0	0.0	0.0	0.0	0.0					
G160.0	0.0	0.0	0.0	0.0	0.0					
G161.0	0.0	0.0	0.0	0.0	0.0					
G162.0	0.0	0.0	0.0	0.0	0.0					
G163.0	0.0	0.0	0.0	0.0	0.0					
G164.0	0.0	0.0	0.0	0.0	0.0					
G165.0	0.0	0.0	0.0	0.0	0.0					
G166.0	0.0	0.0	0.0	0.0	0.0					
G167.0	0.0	0.0	0.0	0.0	0.0					
G168.0	0.0	0.0	0.0	0.0	0.0					
G169.0	0.0	0.0	0.0	0.0	0.0					
G170.0	0.0	0.0	0.0	0.0	0.0					
G171.0	0.0	0.0	0.0	0.0	0.0					
G172.0	0.0	0.0	0.0	0.0	0.0					
G173.0	0.0	0.0	0.0	0.0	0.0					
G174.0	0.0	0.0	0.0	0.0	0.0					
G175.0	0.0	0.0	0.0	0.0	0.0					
G176.0	0.0	0.0	0.0	0.0	0.0					
G177.0	0.0	0.0	0.0	0.0	0.0					
G178.0	0.0	0.0	0.0	0.0	0.0					
G179.0	0.0	0.0	0.0	0.0	0.0					
G180.0	0.0	0.0	0.0	0.0	0.0					

C 平面 (°): 0.0-360.0: 90.0

测试单位:

测试类型: TYPE C

环境温度:

测试员:

Gamma 平面 (°): 0.0-180.0: 1.0

测试设备: GPM-1600

测试距离: 8.167 m

环境湿度:

核 验: